



RIDEAU
Home hardware
building centre

Presents

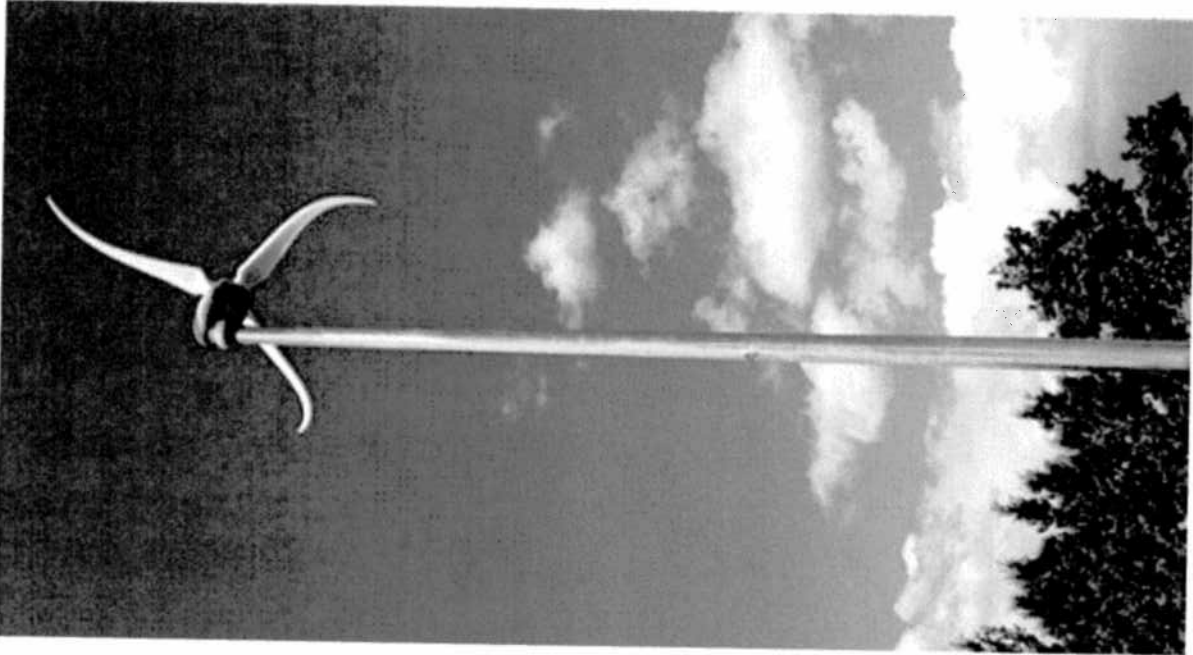

SKYSTREAM^{3.7™}

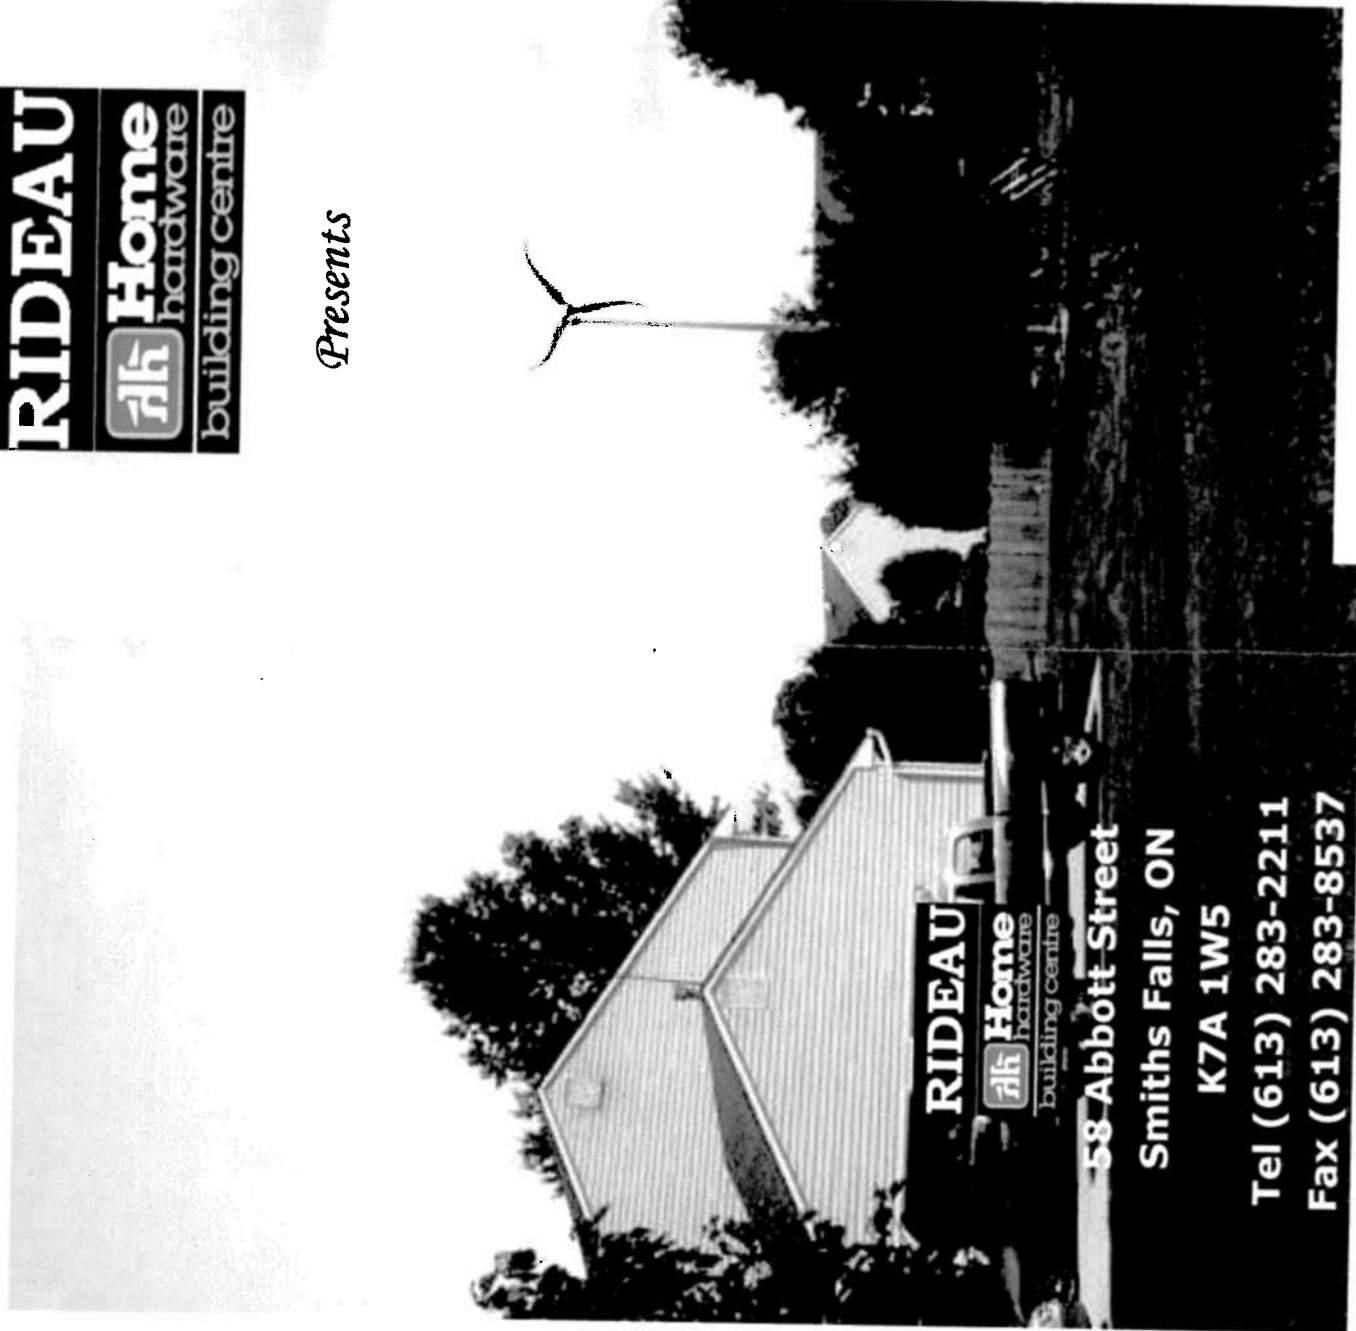

RIDEAU
Home hardware
building centre

58 Abbott Street
Smiths Falls, ON
K7A 1W5

Tel (613) 283-2211
Fax (613) 283-8537

Toll free: 1-800-890-0690
www.rideaulumber.com


SKYSTREAM^{3.7™}



58 Abbott Street
Smiths Falls, ON K7A 1W5
Tel (613) 283-2211
Toll free: 1-800-890-0690
www.rideaulumber.com

SKYSTREAM 3.7™ Residential Power Appliances

How Skystream Works to Reduce Your Electricity Bill

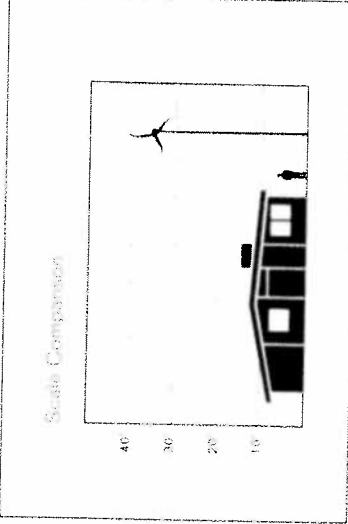

Skystream is the first wind-powered, grid-connected Residential Power Appliance that produces electricity for less than the retail rate of many utilities. Since everything is built in and there are no significant maintenance costs, once your Skystream is operating and the wind is blowing, you'll see an immediate reduction in electricity costs.

Depending on your installed cost, cost of electricity, and average wind speed, Skystream can pay for itself in as little as five years.

Technical Specifications

Model: Skystream 3.7
Rated Capacity: 1.8kW; 2.4kW peak
Weight: 170lbs / 77kg
Rotor Diameter: 12ft/3.72m **Swept Area:** 115.7ft²/10.87m²
Type: Downwind rotor with stall regulation control
Direction of Rotation: Clockwise looking upwind
Blade material: Fiberglass reinforced composite **Number of blades:** 3
Rated Speed: 50-325 rpm **Tip Speed:** 66-213 ft/s / 9.7-63 m/s
Alternator: Slotless permanent magnet brushless **Yaw control:** Passive
Grid Feeding System: Southwest Windpower inverter 120/240 VAC 50-60 Hz
Braking System: Electronic stall regulation with redundant relay switch control
Cut-in Wind Speed: 8 mph/3.5 m/s **Rated Wind Speed:** 20 mph / 9 m/s
User control: Wireless 2-way interface remote system
Survival Wind Speed: 140 mph / 63 m/s **Sound:** 45 decibels @ 40 ft / 12m

www.skystreamenergy.com

FIVE YEAR WARRANTY

Standard Package includes:

Skystream 3.7 Turbine
 33' Monopole Tower
 AC disconnect/50m cable
 Welded J-Bolt Cage
 Tower Hinge Plate

\$ 10,499.00

Installation allowance
 (for base pad, labour, connections, etc.)

\$ 4,500.00 *

Options & Services:

Wireless Monitor Kit **\$ 395.00**
 USB Connect Kit for PC **\$ 119.00**
 Upgrade to 50' Tower (add)
 Wind Monitor Kit **\$ 2,950.00 ***
 (monitor can be returned for \$500.00 credit
 against Skystream purchase)

Taxes extra on all prices quoted

* Final contract price to be determined with site visit

For further information on Renewable Energy Systems:

www.windsongrenewable.com

or call 613-253-7459

Job site inspection is required to confirm final quote:

\$50.00 fee for phone exchanges including: 283/284/285/275/269/624/257/256/253/259/268/264/267/326/273/272/489/258/359/924/342
 All other exchanges: \$ 100.00. Inspection fee is refundable with purchase. Please allow 2 weeks for inspection date.

Homeowner will be responsible for any excavating and site work, as well as obtaining permits or licensing for installation of Skystream Systems and any expenses that are incorporated.