
A01-A

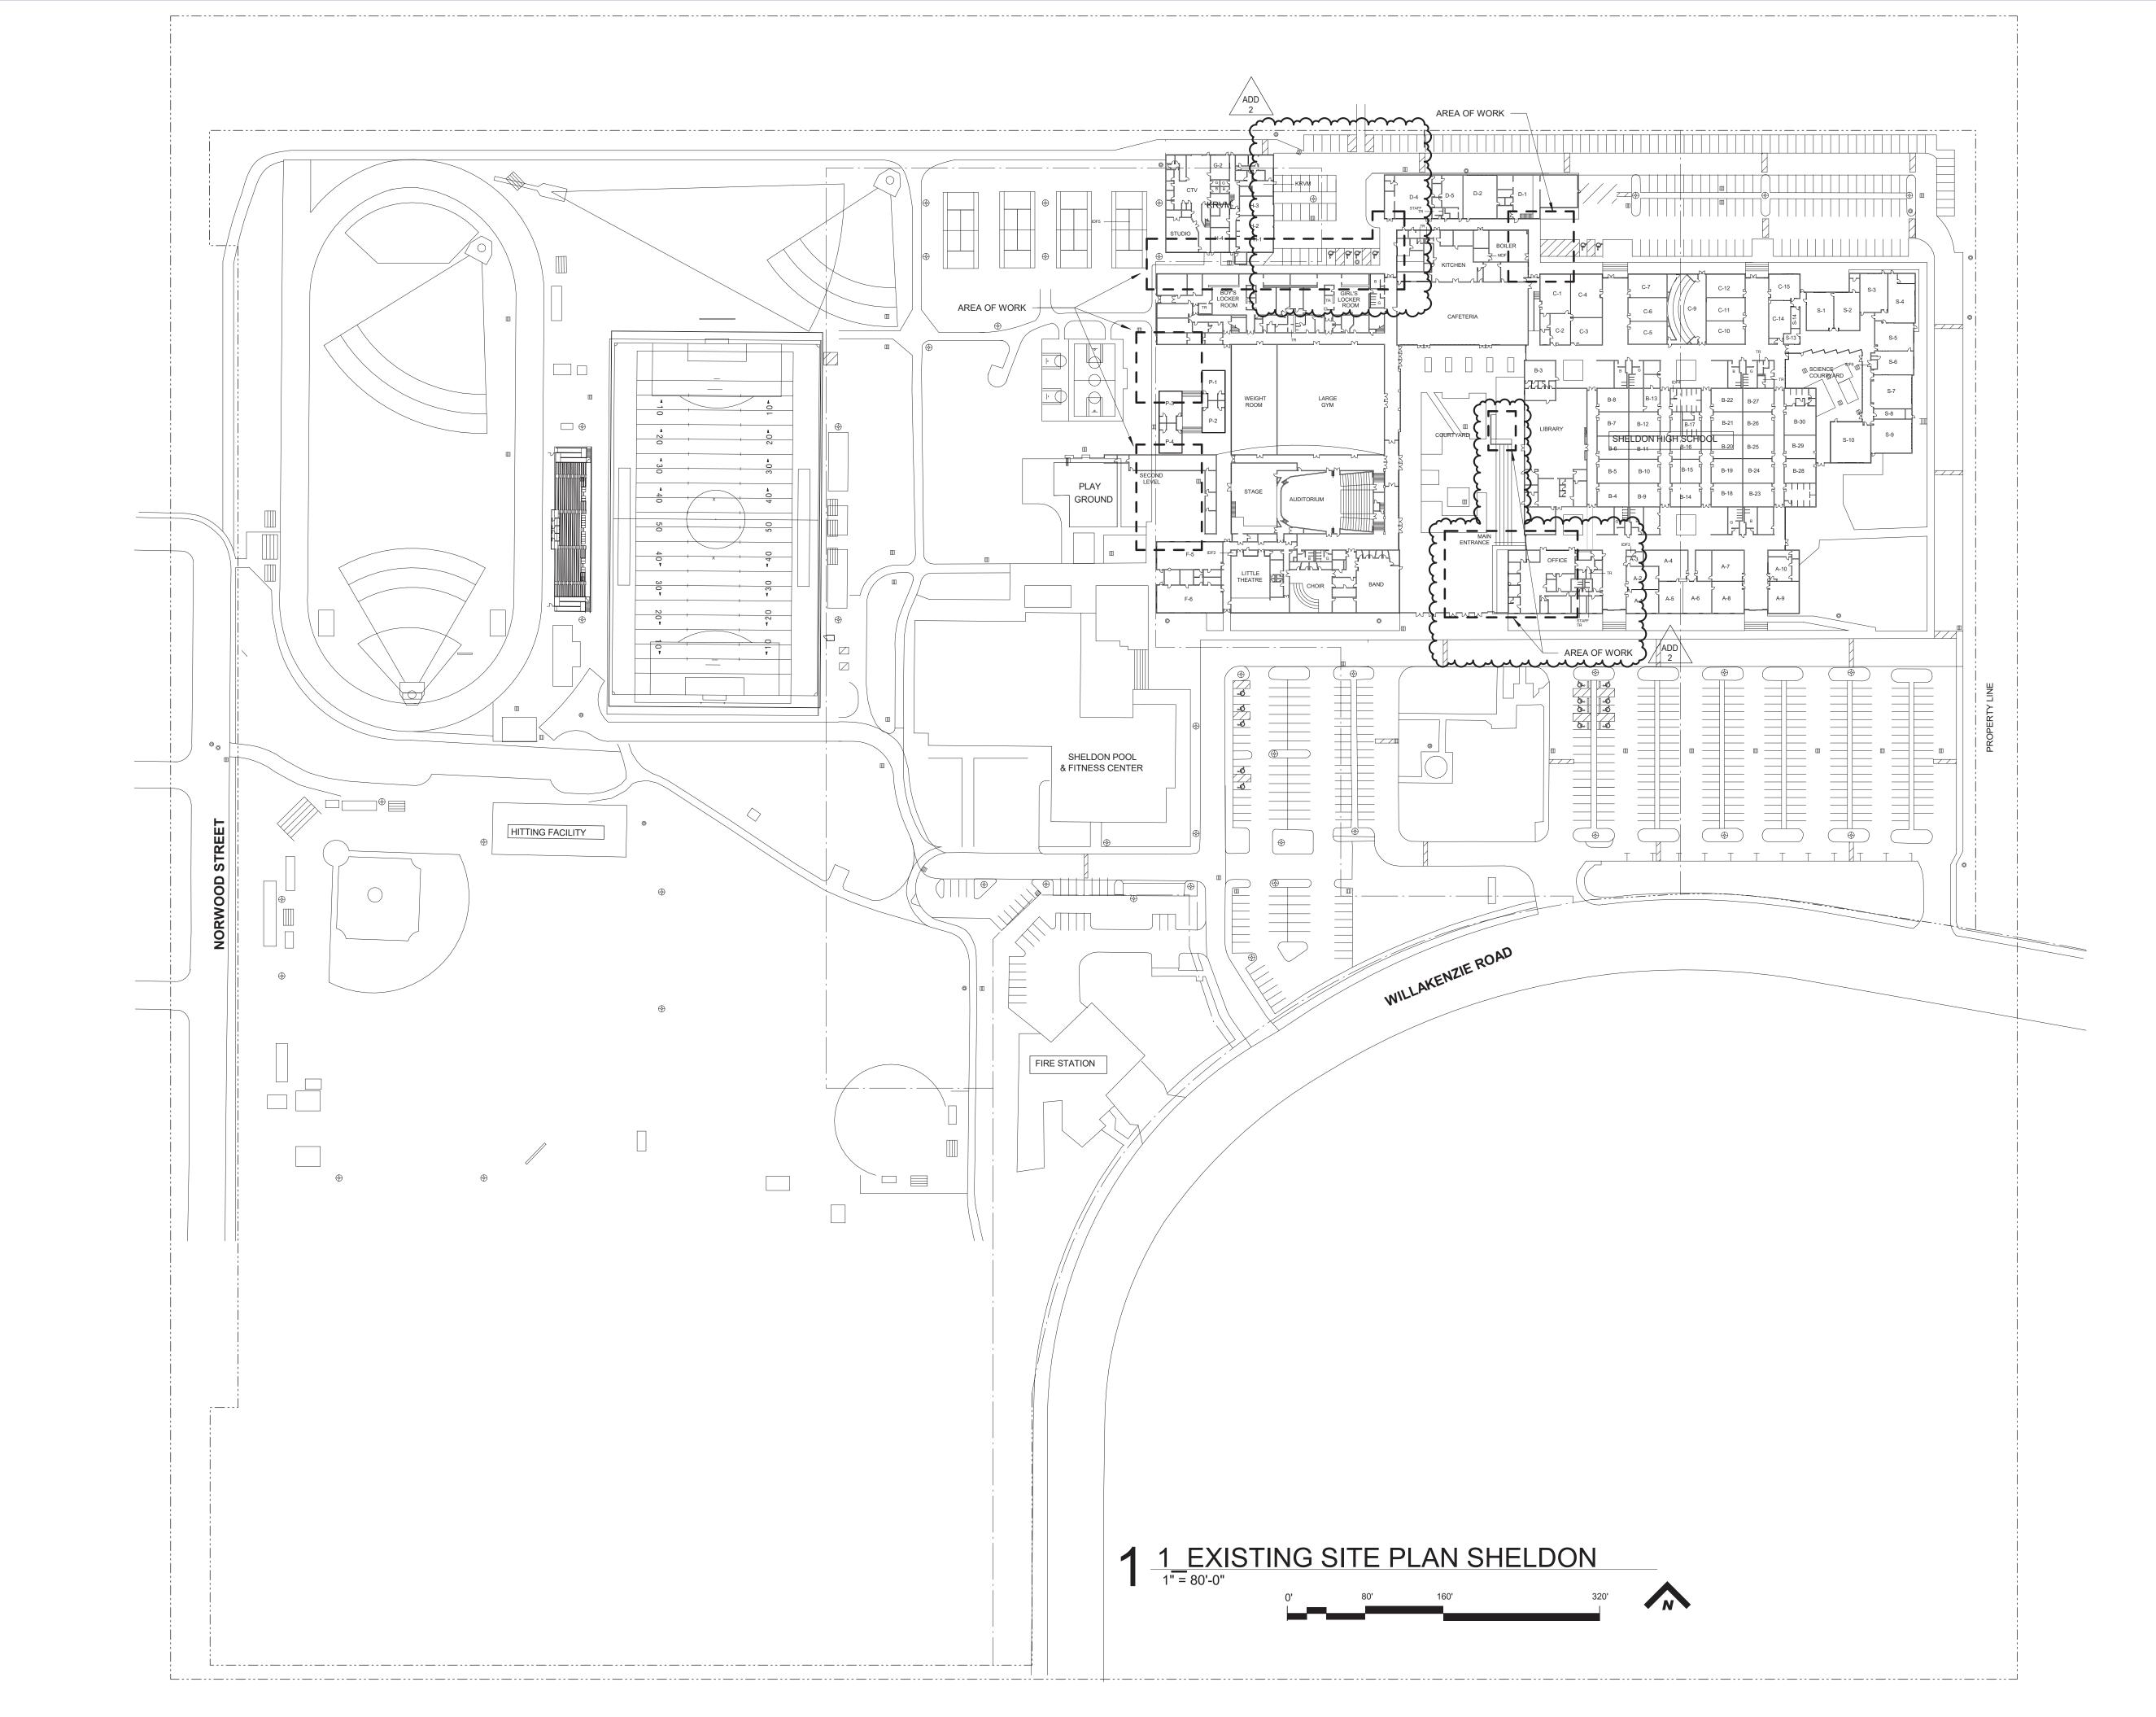

NEW DOOR PANELS WITH REMOVABLE MULLIONS IN EXISTING REUSE EXISTING CARD READER TO FRAMES ADJUST EXISTING DOORS FRAMES TO ACCOMMODATE NEW 6' SECURITY FENCE ELECTRIC STRIKE DOOR OPERATE NEW DOUBLE DOOR WITH TYPICAL PORTAL EGRESS GATES REMOVABLE MULLION NEW STOREFRONT SYSTEM - NEW HM WINDOWS, TYP PROVIDE ROUGH-IN FOR EXTRUDED ALUMINUM VIDEO ACCESS CONTROL PARTITION GAP CLOSURE WALL ASSEMBLY: 2X6 WOOD STUDS @ 16" O.C. CLAD BOTH SIDES WITH 5/8" IMPACT RESISTANT GYP BOARD, TYPICAL A03-A 21' - 0" V.I.F. 48" SS CORNER GUARD NEW CARD -READER ALIGN START OF HIGHER -PROVIDE POWER AND FENCE SECTION WITH DATA CONNECTION EDGE OF MASORY WALL APPLY LAMINATED FILM ON EXISTING GLAZING, THIS ROOM TYPICAL DOOR RELEASE CONTROLS AT EXISTING DESK NEW HALF HEIGHT SWINGING DOOR, VERIFY ROUGH OPENING IN FIELD GYP/ PT-1

2 FLOOR PLAN - NEW CONSTRUCTION

1/8" = 1'-0"

0' 4' 8' 16'

(E)/(E)

(E)/ RB

WALL FILL PATTERNS: EXISTING WALL ASSEMBLY NON FIRE-RATED WALL ASSEMBLY CARD READER

REX

GENERAL NOTES - DEMOLITION

CASEWORK TO BE SALVAGED.

OR RELOCATED.

SALVAGED.

ANCHORS)

PROTECT ALL EXISTING CONSTRUCTION TO REMAIN.

CHANGES TO FURNITURE AND SYSTEM CASEWORK.

GENERAL NOTES - FLOOR PLANS

REQUIRED TO LAY OUT THE WORK.

COORDINATE WITH OWNER FOR REMOVAL AND STORAGE OF (E) EQUIPMENT AND

REMOVE AND STORE MATERIAL AND EQUIPMENT WHERE INDICATED TO BE SALVAGED

WHEN REMOVING FLOOR FINISHES REMOVE ALL ADHESIVE, GROUT, RESIDUE AND

COORDINATE WITH ELECTRICAL FOR ITEMS TO BE DEMOLISHED, REMOVED, AND/OR

COORDINATE WITH MECHANICAL/PLUMBING FOR ITEMS TO BE DEMOLISHED, AND/OR

COORDINATE WITH OWNERS MODULAR SYSTEMS FURNITURE CONTRACTOR FOR

COORDINATE WITH OWNER FOR ANY CEILING/FLOORING DISRUPTION REGARDING

 \cdots

REPAIR PATCHED SURFACES THAT ARE DAMAGED, LIFTED, DISCOLORED, OR SHOWING OTHER IMPERFECTIONS DUE TO PATCHING WORK. IF DEFECTS ARE DUE TO CONDITION OF SUBSTRATE, REPAIR SUBSTRATE PRIOR TO REPAIRING FINISH. WHERE (E) FLOOR IS TO REMAIN, PROTECT FROM DAMAGE. PATCH AND REPAIR ANY HOLES IN CONCRETE SLAB CAUSED BY DEMOLITION OF EXISTING WALLS, (I.E. WALL

PATCH AND REPAIR ANY WALL AND CEILING LOCATIONS WHERE EXISTING ELECTRICAL AND VOICE/DATA OUTLET, JUNCTION BOXES, AND SIMILAR WALL

PATCH AND REPAIR WALL AND CEILING SURFACES WHERE MODULAR SYSTEMS

PATCH AND REPAIR ANY WALL LOCATIONS WHERE EXISTING WALL COVERING HAS

PATCH AND REPAIR ANY WALL LOCATIONS WHERE EXISTING WALL BASE HAS BEEN

ACCESSORIES, HARDWARE OR OTHER SURFACE MOUNTED ELEMENTS HAVE BEEN

VERIFY LOCATION OF PROX-CARD READERS, AUTOMATIC DOOR OPENERS AND WIRELESS ACTUATORS WITH ARCHITECT DURING ROUGH-IN PHASE OF THE WORK.

COORDINATE WITH OWNER FOR ANY CEILING/FLOORING DISRUPTION REGARDING

DEMOLITION LEGEND

(E) WALL TO REMAIN

TO BE DEMOLISHED

□□□□□ WALL TO BE DEMOLISHED

==== DOOR AND FRAME

MOUNTED ITEMS ARE REMOVED OR ABANDONED WITHIN THE WORK AREA.

PATCH AND REPAIR ANY WALL LOCATIONS WHERE EXISTING EQUIPMENT,

FURNITURE WAS REMOVED BY SEPARATE CONTRACTOR.

BEEN REMOVED WITHIN THE WORK AREA.

REMOVED WITHIN THE WORK AREA.

REMOVED WITHIN THE WORK AREA

DIMENSIONS SHOWN ARE TO THE FACE OF STUD, CONCRETE OR MASONRY UNLESS OTHERWISE NOTED. CONTACT THE ARCHITECT FOR ANY ADDITIONAL DIMENSIONS

MASONRY DIMENSIONS ARE THE ACTUAL MASONRY UNIT SIZES UNLESS OTHERWISE

REMOVE EXISTING DOOR WALL STOPS WHERE DOORS NO LONGER EXIST.

PROTECT (E) FLOORS, WALLS, CEILINGS & FINISHES TO REMAIN.

CASEWORK TAG-TAG ONLY ON EXISTING CASEWORK TO BE RELOCATED TAG PLACED ON FRONT OF CASEWORK ROTATE ACCORDINGLY

REQUEST TO EXIT

DOOR SCHEDULE - SH DOOR **PANEL** DOOR FRAME **HARDWARE TYPE** GROUP TYPE **FINISH** COMMENTS CONTROL ACCESS - SEE HARDWARE SPECIFICATION WOOD WITH SIDE LITE - CONTROL ACCESS - SEE HARDWARE SPECIFICATION ALUM ALUM CONTROL ACCESS - SEE HARDWARE SPECIFICATION ALUM CONTROL ACCESS - SEE HARDWARE SPECIFICATION ALUM PER MANUFACTURER PER MANUFACTURER HALF HEIGHT ALUMINUM TRAFFIC DOOR - VERIFY OPENING IN FIELD ALUM

PER MANUFACTURER PER MANUFACTURER HALF HEIGHT ALUMINUM TRAFFIC DOOR - VERIFY OPENING IN FIELD

- NEW 6' TALL BLACK CHAIN LINK FENCE

OCCUPANCY: E STORAGE

STORAGE 153 SF 300

OCCUPANCY: E

OFFICE BUSINESS

5225 SF | 150

35

OCCUPANCY: E

STORAGE

STORAGE

408 SF 300

(2)


STORAGE

RESTROOM

STORAGE

6 EGRESS PLAN -MAIN OFFICE

1/16" = 1'-0"

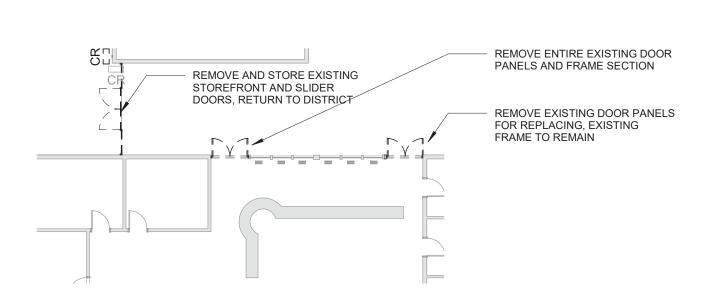

1 FLOOR PLAN - DEMOLITION
1/16" = 1'-0"

SECURITY IMPROVEM

SHEET TITLE: SHELDON -

FLOOR PLANS

REVISIONS:


DESCRP. DATE

1 ADD 2


ISSUE DATE: 03.15.23

A02-A


1 HS - SHELDON - ENTRY VESTIBULE - N

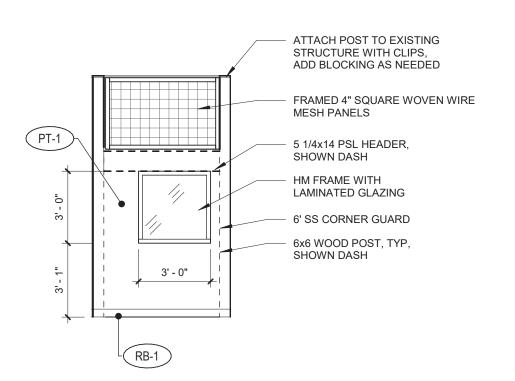


2 HS - SHELDON - ENTRY VESTIBULE - E

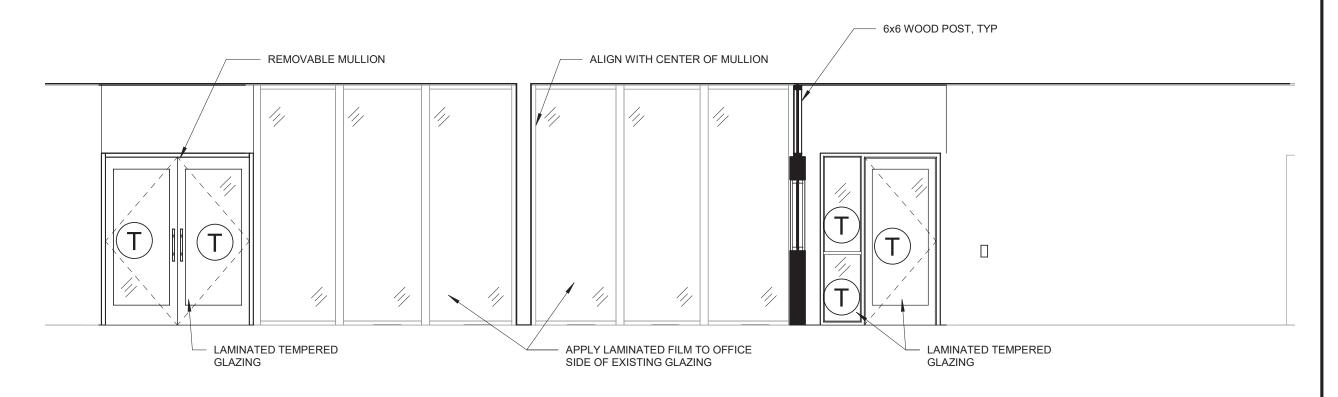

3 HS - SHELDON - ENTRY VESTIBULE - S

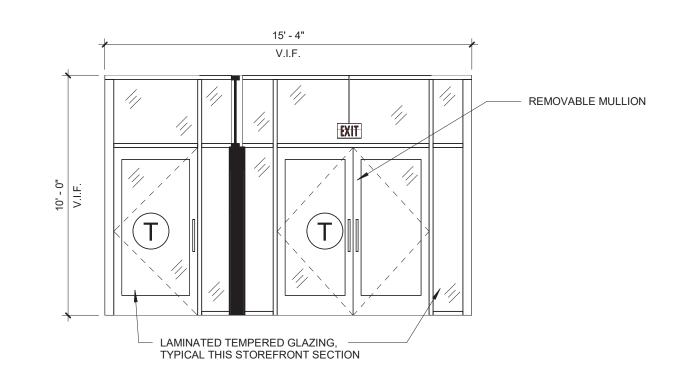


4 HS - SHELDON - ENTRY VESTIBULE - W

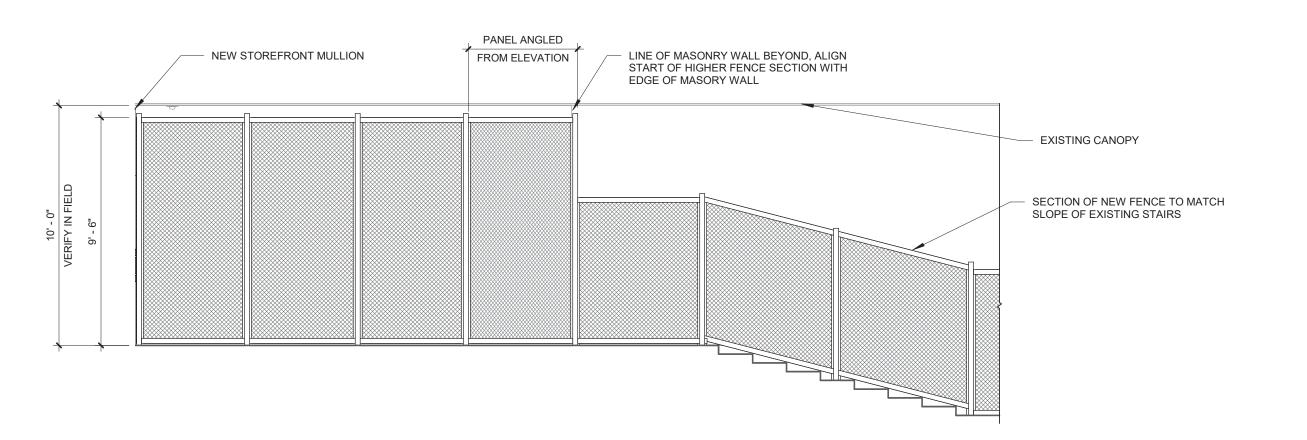


5 SHELDON FENCE ELEVATION


1/4" = 1'-0"

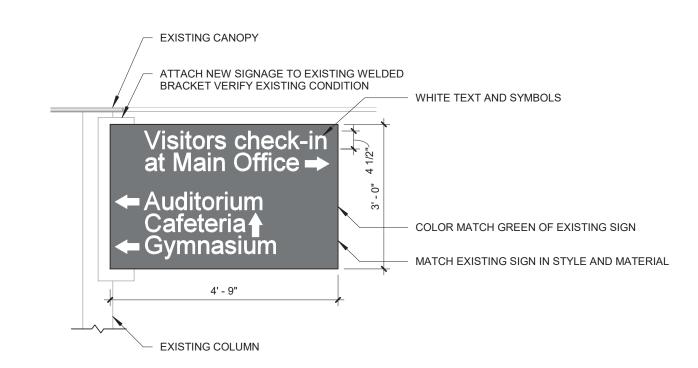

6 REPLACEMENT SIGNAGE
1/2" = 1'-0"

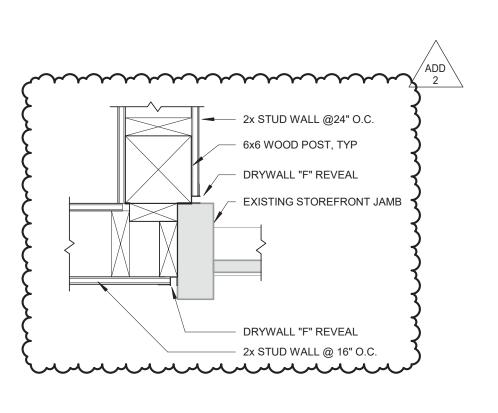


9 WALL DETAIL
1 1/2" = 1'-0"

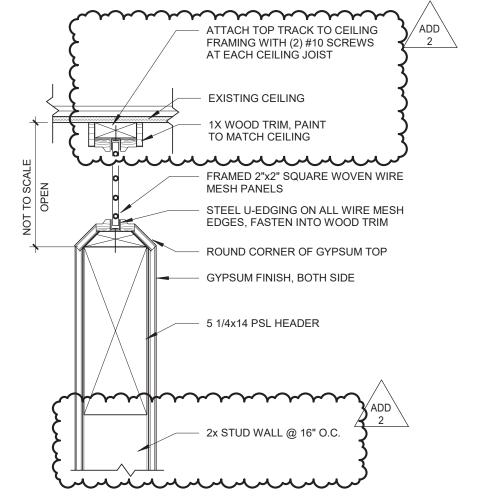

7 HEAD DETAIL

1 1/2" = 1'-0"

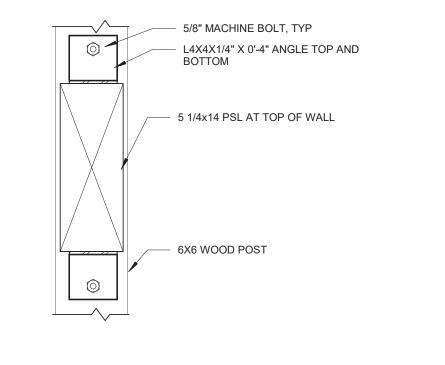

8 HEADER CONNECTION
1 1/2" = 1'-0"

4J SECURITY IMPROVEMI

SHEET TITLE: SHELDON -**ELEVATIONS**

> REVISIONS: # DESCRP. DATE 1 ADD 2

ISSUE DATE: 03.15.23

A03-A



4J SECURITY IMPROVEMI


SHEET TITLE: SHELDON -SITE WORK

REVISIONS: # DESCRP. DATE

1 ADD 2

ISSUE DATE: 03.15.23

A04-A

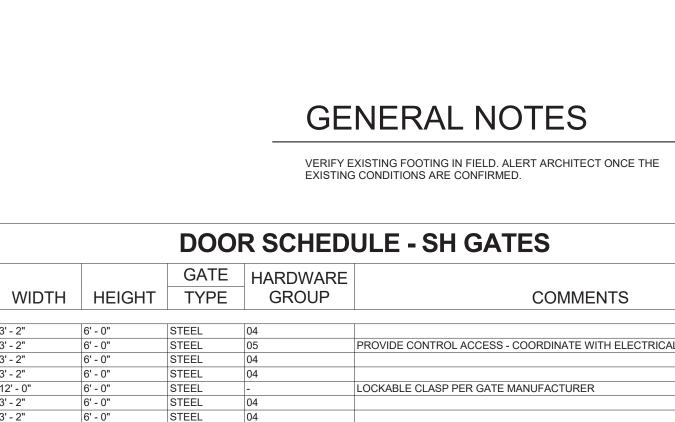

STEEL

STEEL

STEEL

STEEL STEEL

STEEL STEEL STEEL STEEL


STEEL STEEL

COMMENTS

PROVIDE CONTROL ACCESS - COORDINATE WITH ELECTRICAL

LOCKABLE CLASP PER GATE MANUFACTURER

MARK

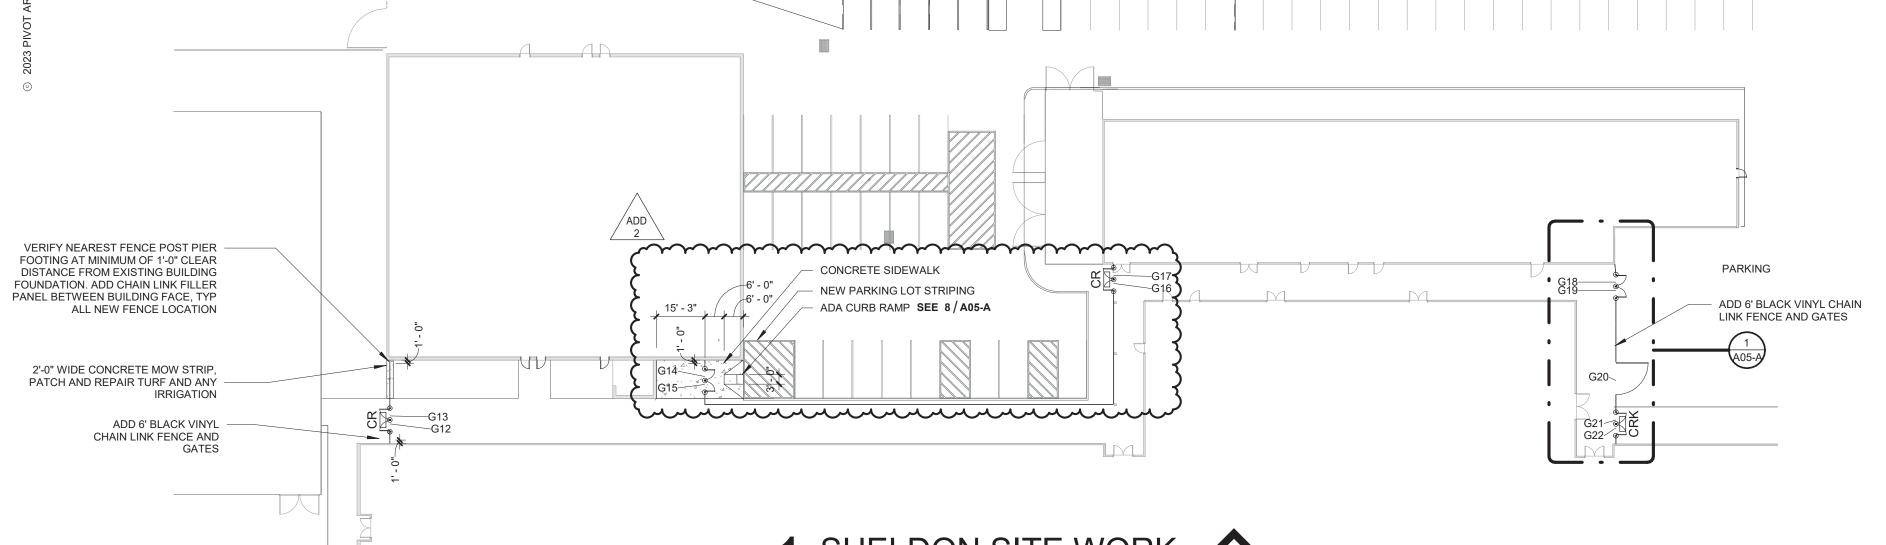

OCCUPANCY: E

CLASSROOM **EDUCATION**

600 SF 20

OCCUPANCY: E

CLASSROOM

EDUCATION

600 SF 20

MOBILE

CLASSROOM

10,200 SF COURTYARD

ADD 6' BLACK VINYL CHAIN LINK FENCE AND

ADD 6' BLACK VINYL

CHAIN LINK FENCE AND

BOLT AND EPOXY STANDARD

FENCE POST INTO EXISTING

PAVEMENT, DO NOT EMBED FENCE POST THIS SECTION

FOR TYPICAL GATE DETAILS SEE SHEET A05-A

manne

GATES

OCCUPANCY: E

CLASSROOM

EDUCATION

600 SF 20

(30)

OCCUPANCY: E

CLASSROOM


EDUCATION

600 SF 20

-G08


MOBILE CLASSROOM

G04 G03

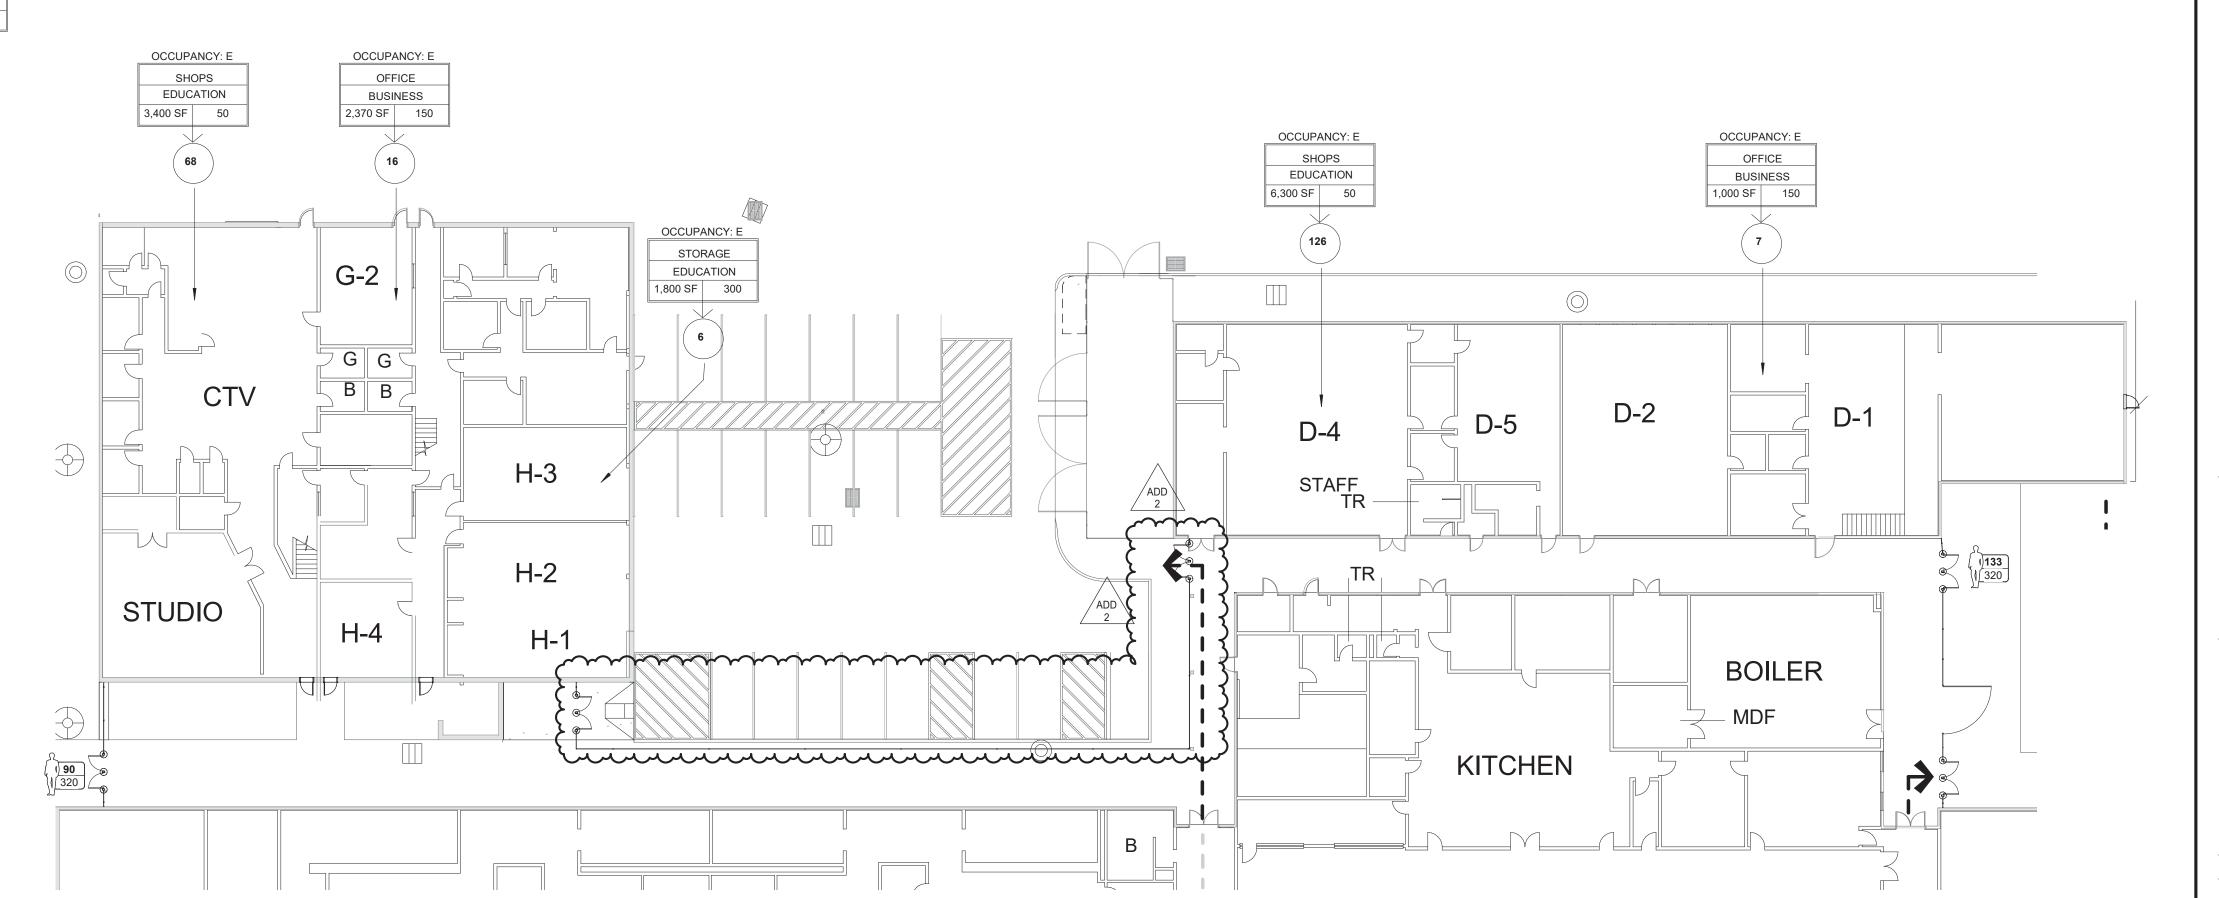


REFLECTIVE EGRESS SIGNAGE


7 DOUBLE GATE SECURED SIDE ELEVATION 1/2" = 1'-0"

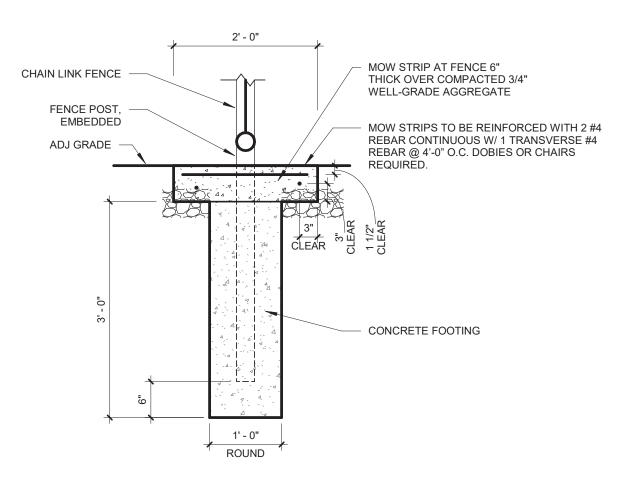

6 TYPICAL FENCE POST
3/4" = 1'-0"

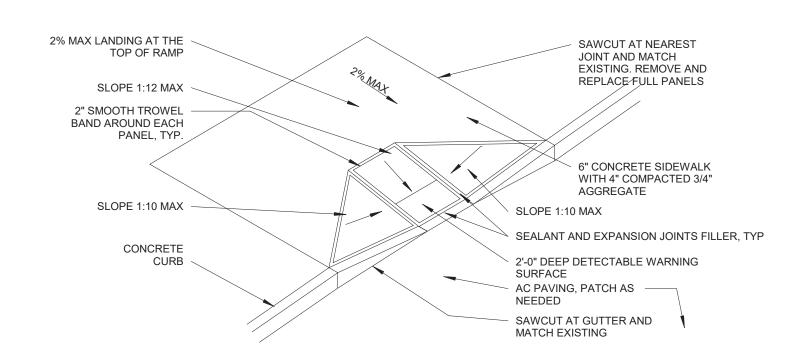


8 CURB RAMP
3/16" = 1'-0"

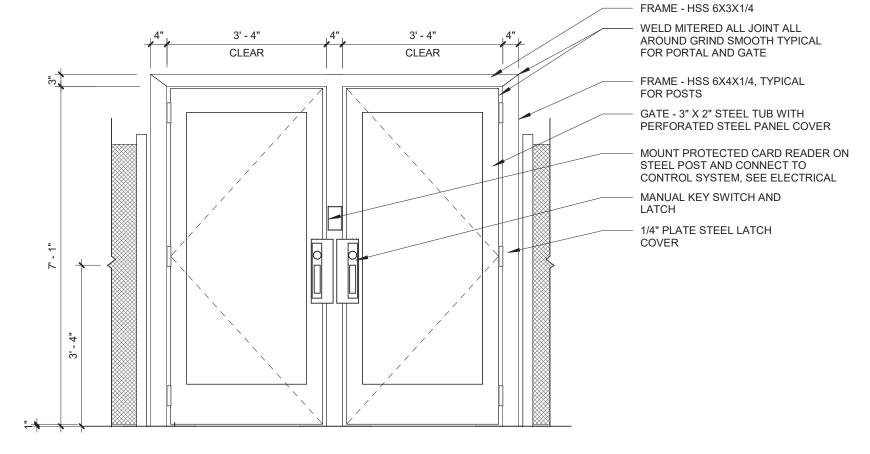


4 DOUBLE GATE NON-SECURED SIDE ELEVATION


1/2" = 1'-0"

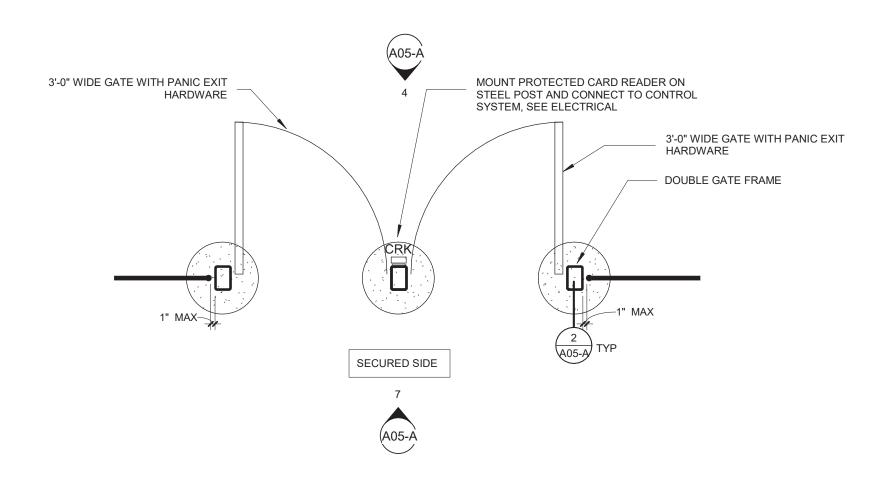

3 DOUBLE GATE PLAN
1/2" = 1'-0"

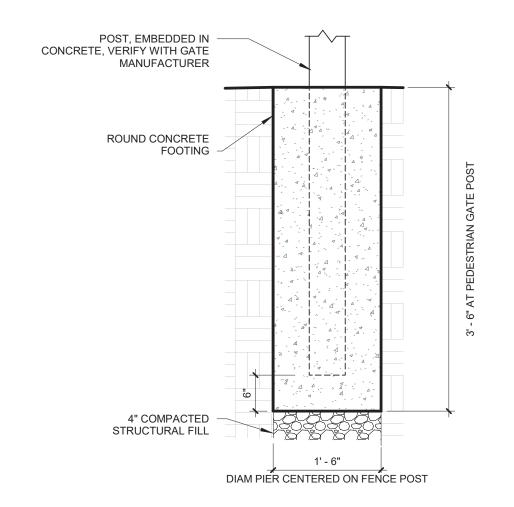

2 FOOTING AT VEHICULAR / PEDESTRIAN GATE POST
3/4" = 1'-0"

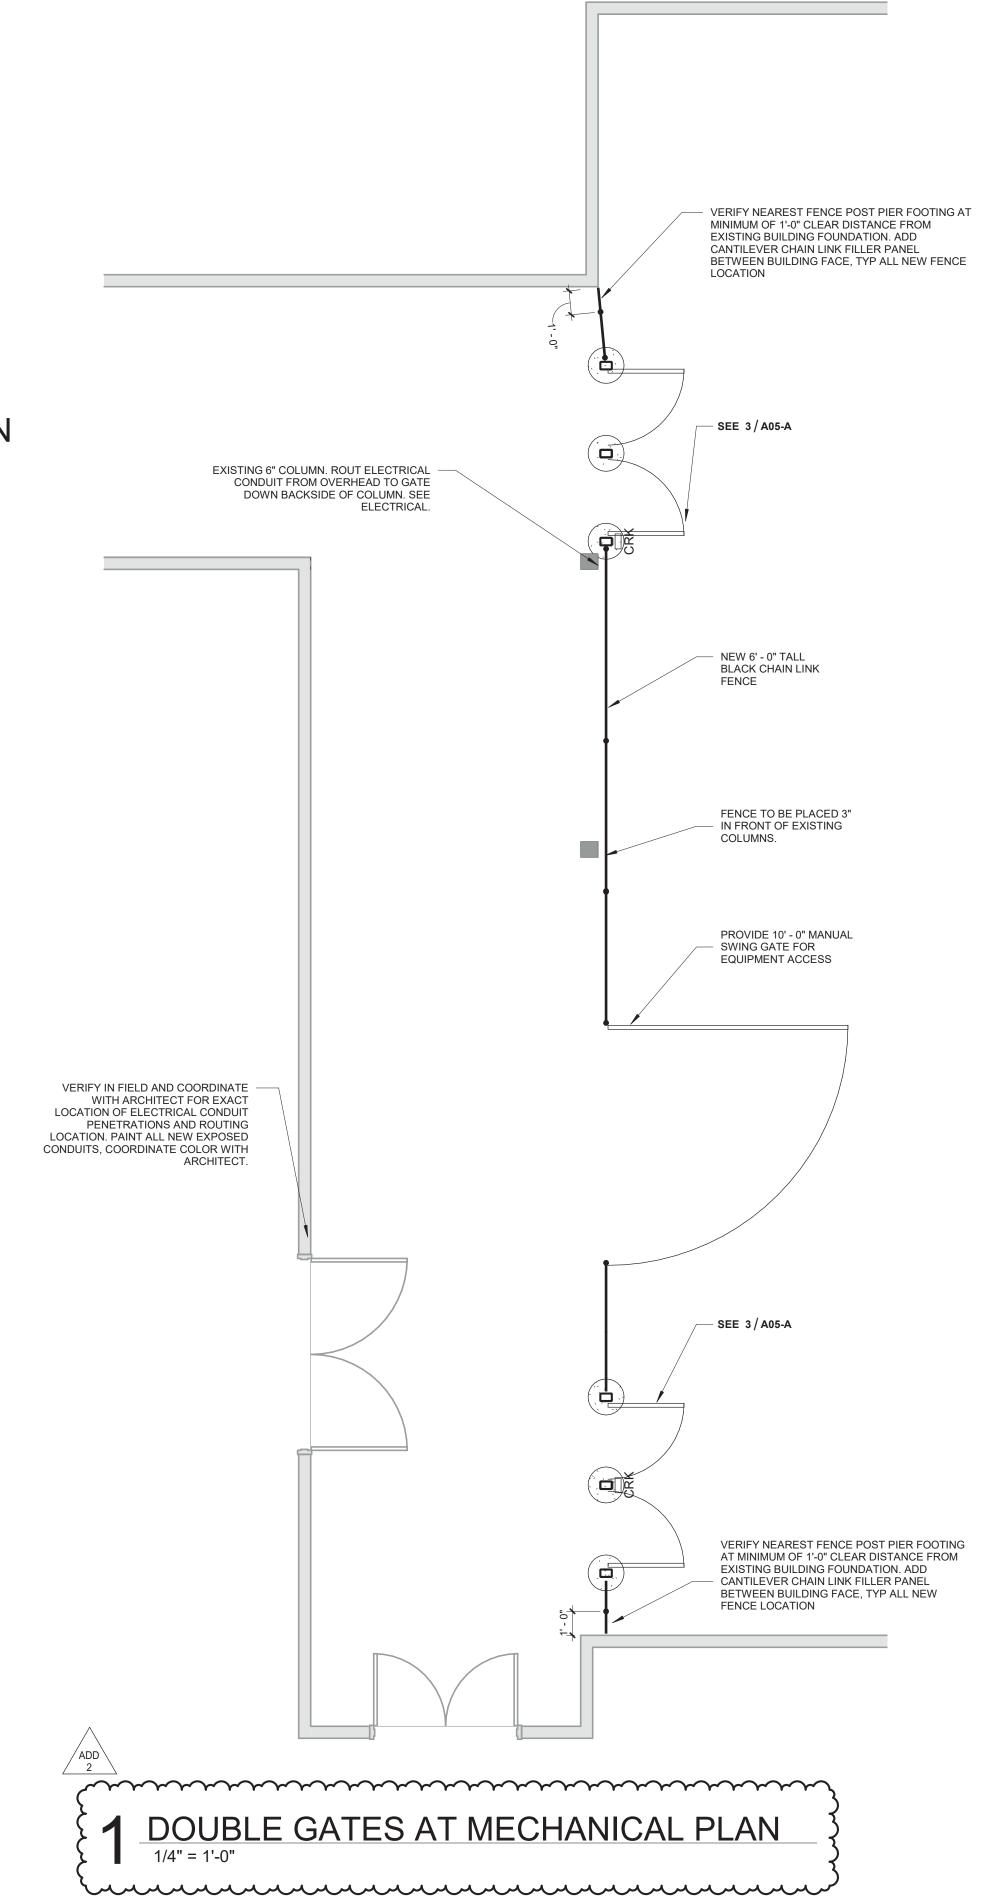



SECURITY IMPROVEM DRAWING

SHEET TITLE: **PERSONAL GATE AT MECHANICAL**

REVISIONS: # DESCRP. DATE

1 ADD 2

ISSUE DATE: 03.15.23

A05-A

1 1/2" DIAM GALVANIZED PIPE TOP AND

1 1/2" DIAM GALVANIZED PIPE POSTS @

1 1/2" DIAM GALVANIZED PIPE TOP AND

FLUSH 1/2" x 5" x 5" EMBEDDED PLATE W/ (4) 1/2"-DIAMETER x 2-1/8" HEADED

PROVIDE 1/4" FILLET WELD ALL THE WAY AROUND PIPE COLUMN TO BASEPLATE

ISOLATION JOINT FILLER AND SEALANT,

#5 VERTICAL @ 16" O.C., ALTERNATE LEG

ANCHOR STUDS @ 3" O.C. EACH WAY,

3/4" CHAMFERED EDGES, TYP.

DIRECTION IN FOOTING

NEW SIDEWALK

3 TYPICAL GUARDRAIL
1 1/2" = 1'-0"

EXISTING SIDEWALK

1 1/2" GALVANIZED PIPE HANDRAIL ATTACHED TO GUARD RAIL WHERE

OCCURS

48" O.C. MAX


BOTTOM

- 4" CONCRETE SLAB WITH #4 REBAR AT 24"

O.C. E.W. OVER COMPACTED STRUCTURAL FILL

(3) #4 HORIZONTAL CONTINUOUS


VERIFY EXISTING FOOTING IN FIELD. ALERT ARCHITECT ONCE THE EXISTING CONDITIONS ARE CONFIRMED.

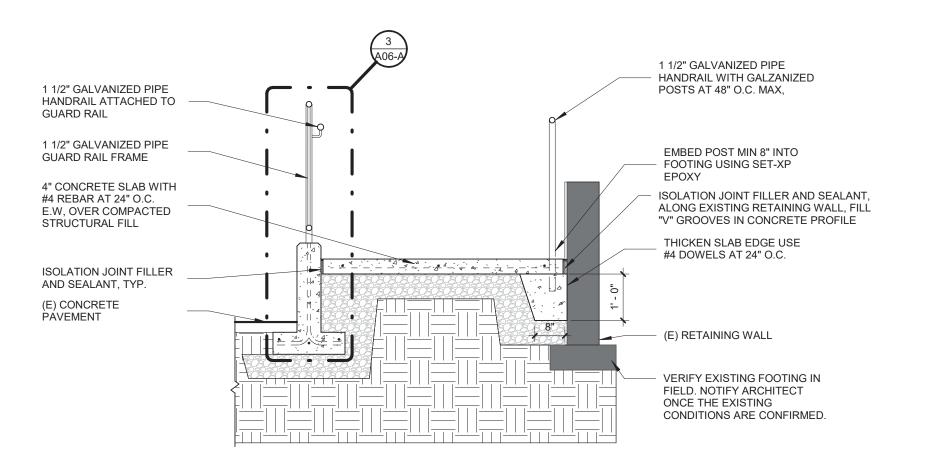

#4 REBAR AT 24" O.C., 4" THICK PORTLAND - CEMENT CONCRETE WITH BROOM FINISH EACH WAY 6" OF SUB BASE COURSE COMPACT SUBGRADE


5 RAMP CROSS SECTION
1/2" = 1'-0"

4 CONCRETE SIDEWALK
1 1/2" = 1'-0"

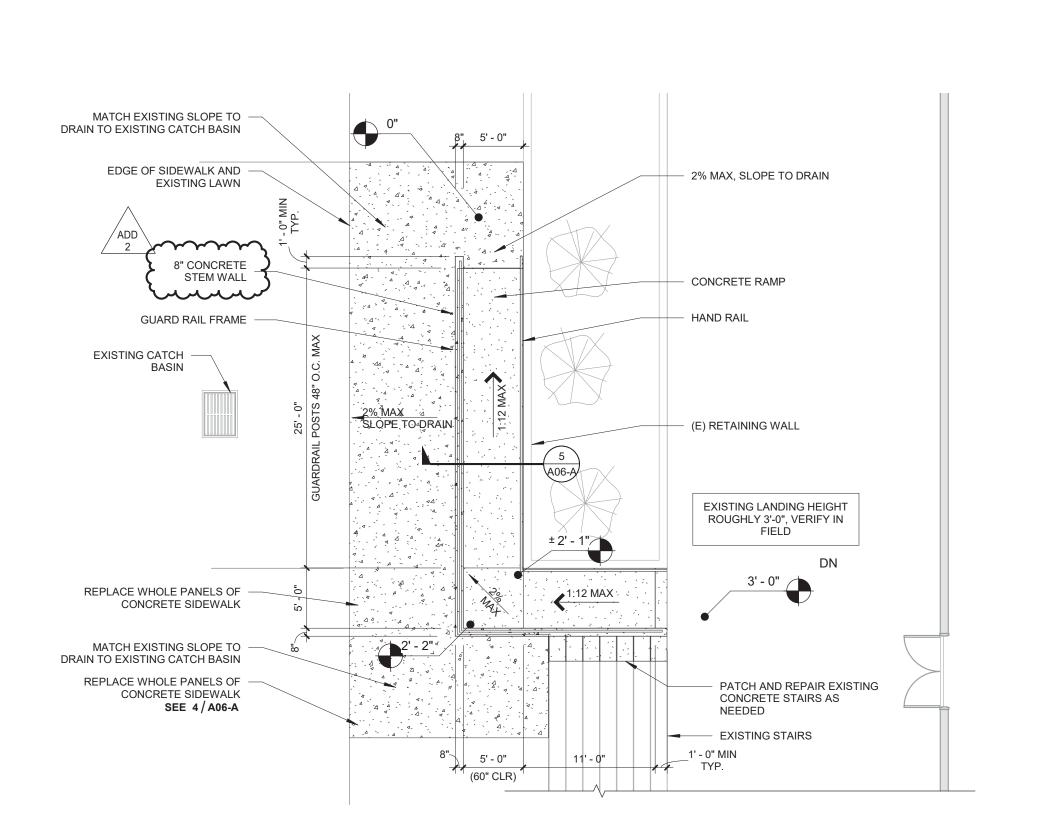

2 RAMP PLAN

1/8" = 1'-0"

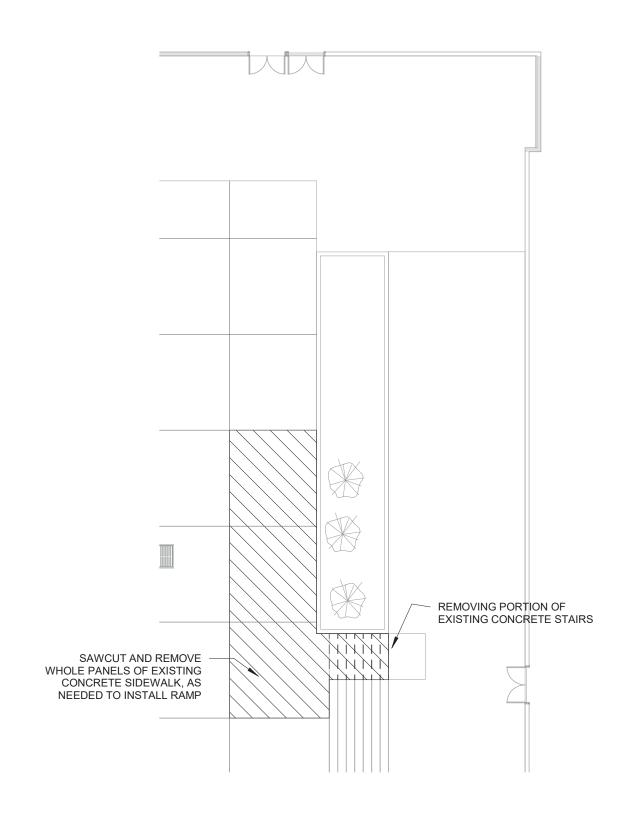

1 RAMP PLAN - DEMOLITION
1/16" = 1'-0"

SECURITY I

S

SHEET TITLE: SHELDON RAMP

REVISIONS:

DESCRP. DATE 1 ADD 2

ISSUE DATE: 03.15.23

A06-A

CASEWORK TO BE SALVAGED. REMOVE EXISTING DOOR WALL STOPS WHERE DOORS NO LONGER EXIST.

PROTECT (E) FLOORS, WALLS, CEILINGS & FINISHES TO REMAIN. REMOVE AND STORE MATERIAL AND EQUIPMENT WHERE INDICATED TO BE SALVAGED


OR RELOCATED. WHEN REMOVING FLOOR FINISHES REMOVE ALL ADHESIVE, GROUT, RESIDUE AND


G. COORDINATE WITH ELECTRICAL FOR ITEMS TO BE DEMOLISHED, REMOVED, AND/OR

H. COORDINATE WITH MECHANICAL/PLUMBING FOR ITEMS TO BE DEMOLISHED, AND/OR SALVAGED.

COORDINATE WITH OWNERS MODULAR SYSTEMS FURNITURE CONTRACTOR FOR CHANGES TO FURNITURE AND SYSTEM CASEWORK.
 COORDINATE WITH OWNER FOR ANY CEILING/FLOORING DISRUPTION REGARDING

DEMOLITION LEGEND

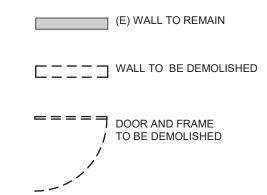

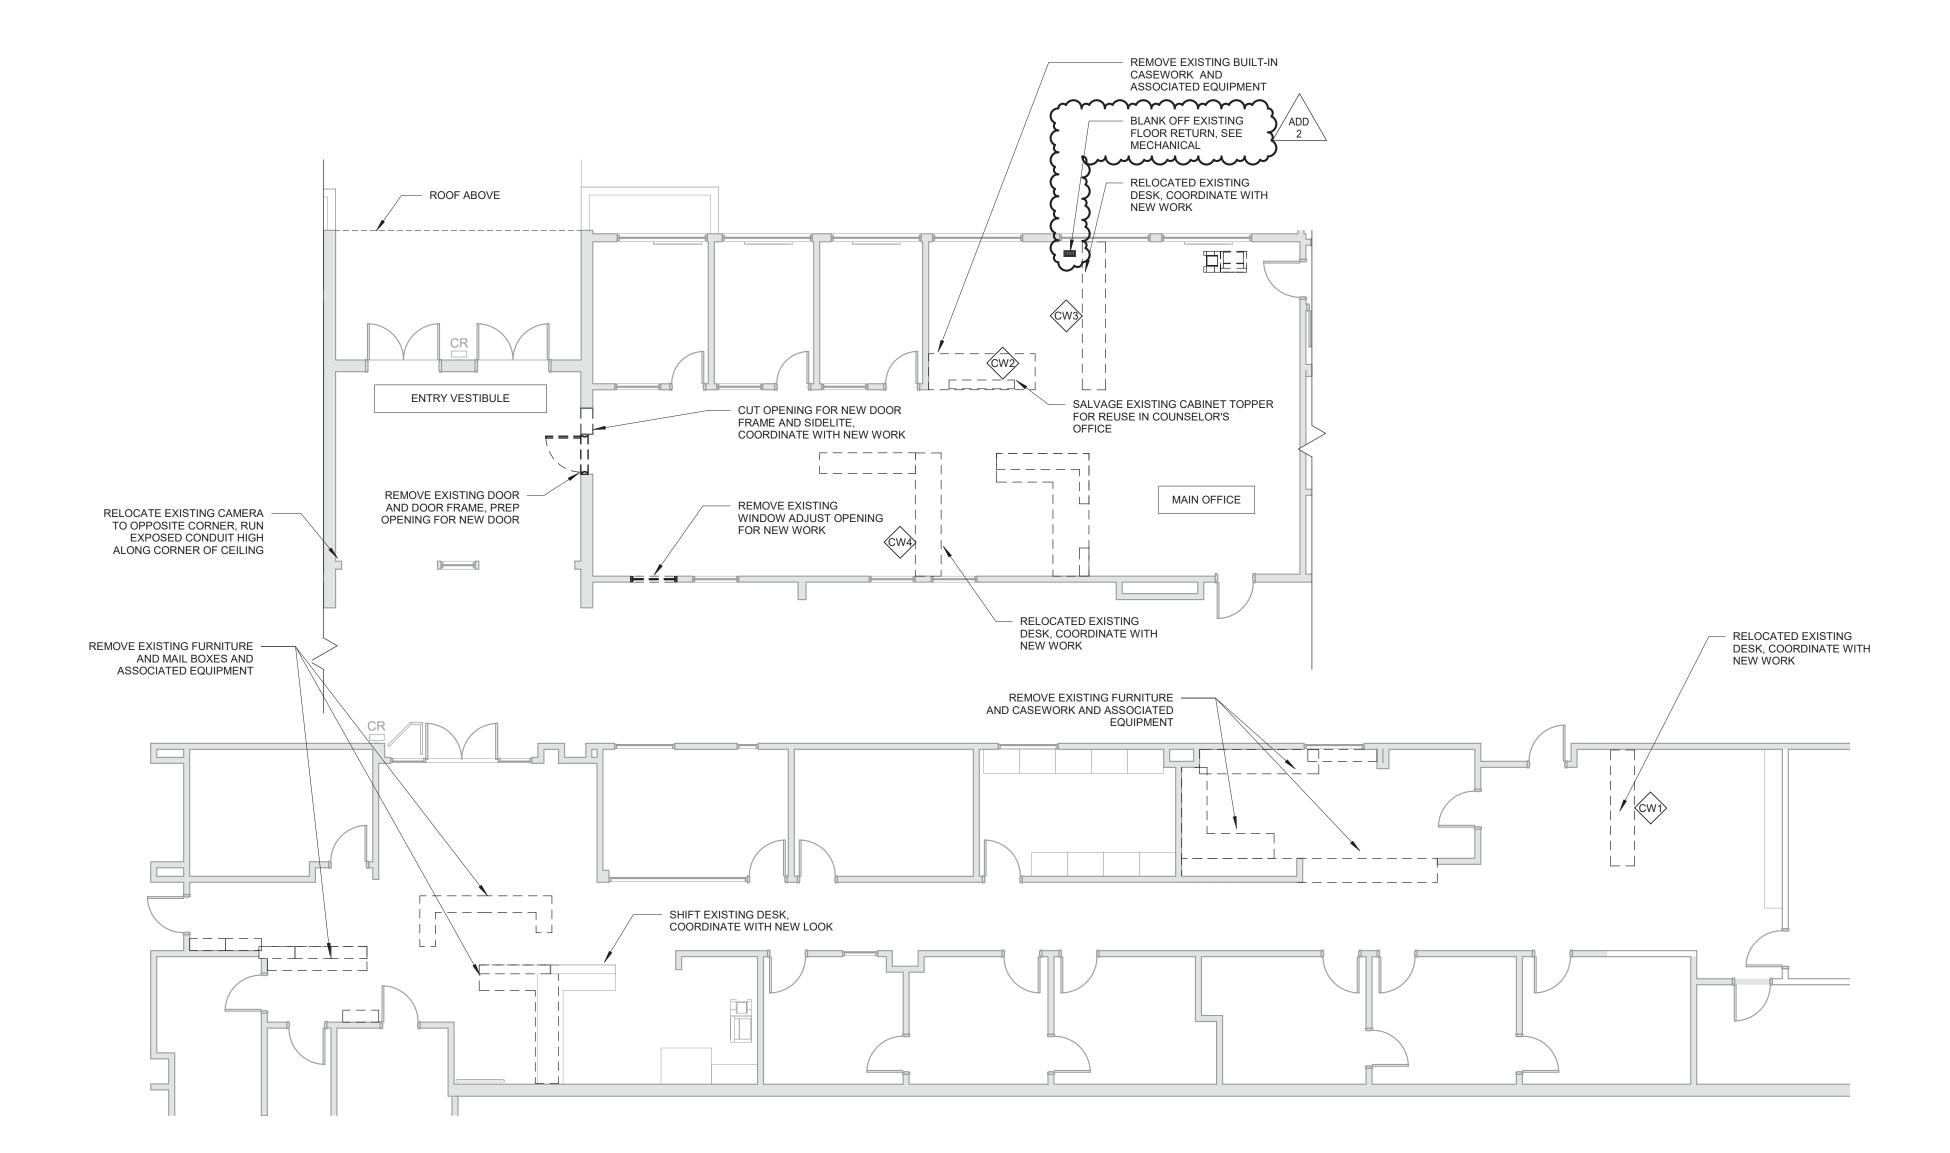

1 FLOOR PLAN - DEMOLITION

1/8" = 1'-0"

SECURITY IMPROVEMI

SHEET TITLE:

SOUTH - DEMO PLAN

REVISIONS:

DESCRP. DATE 1 ADD 2

ISSUE DATE: 03.15.23

A02-B

— 6' TALL STUD WALL CODE MINIMUM 5 PSF OUT-OF-PLANE


ALL DRILLING WITH 4J PRIOR TO BEGINNING OF WORK


VERIFY LENGTH OF EXISTING CASEWORK

RELOCATED EXISTING CASEWORK, REPLACE PLAM COUNTERTOP

600S162-33 AT 16" O.C. W/ RCKW EVERY OTHER STUD (1) ANCHOR BOLT AT RCKW (THRU BOLT IN 2 1/2" SLAB), COORDINATE

DOOR SCHEDULE - SO							
MARK	WIDTH	HEIGHT	DOOR PANEL	FRAME		HARDWARE	
			TYPE	TYPE	FINISH	GROUP	COMMENTS
SO1	6' - 0"	6' - 10"	ALUM	ALUM		01	
SO2	6' - 0"	6' - 10"	ALUM	ALUM		05	CONTROL ACCESS SEE HARDWARE SPECIFICATION
SO3	5' - 2"	7' - 0"	НМ	НМ	PAINT	03	CONTROL ACCESS - CARD READER, REMOTE LOCK/ UNLOCK
SO4	3' - 0"	7' - 0"	НМ	НМ		04	CONTROL ACCESS SEE HARDWARE SPECIFICATION
SO5	3' - 10"	3' - 6"	ALUM	ALUM	PER MANUFACTURER	PER MANUFACTURER	HALF HEIGHT ALUMINUM TRAFFIC DOOR - VERIFY OPENING IN FIELD
SO6	3' - 0"	7' - 0"	WOOD	HM	PAINT	02	OFFICE LOCKSET
S07	3' - 0"	7' - 0"	WOOD	HM	PAINT	02	OFFICE LOCKSET
SO8	3' 10"	7'10"	WOOD	HM	PAINT	<u>62 </u>	OFFICE LOCKSET

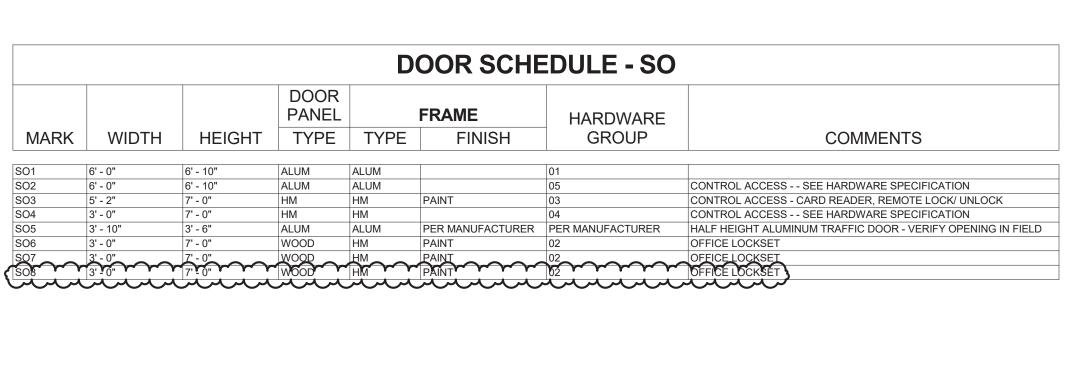

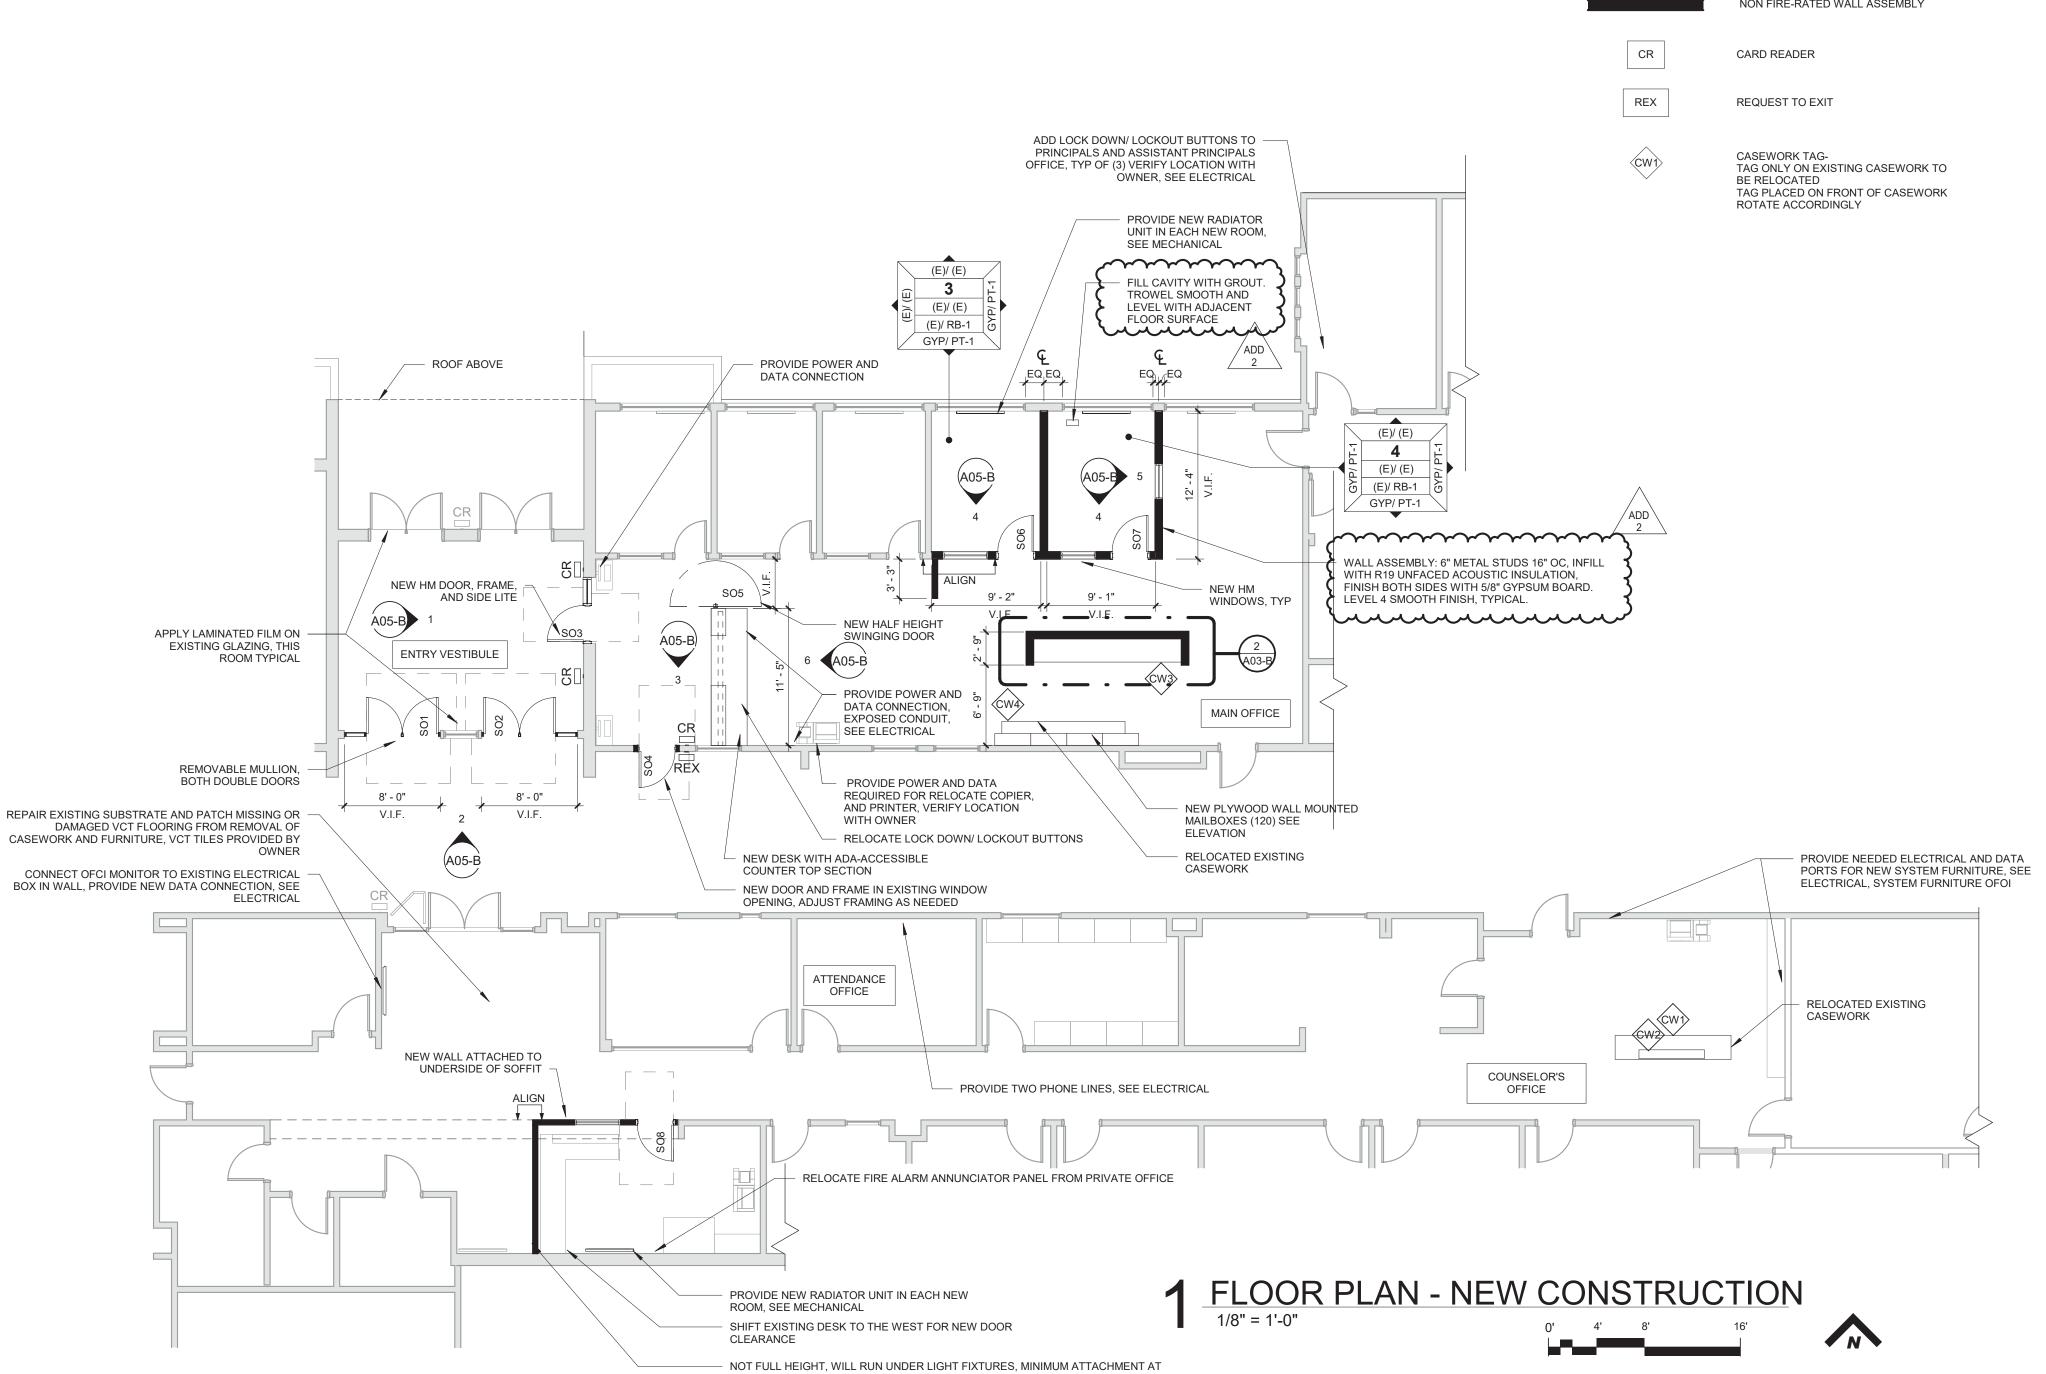

EXISTING WALL DUE TO WINDOWS

GENERAL NOTES - FLOOR PLANS

DIMENSIONS SHOWN ARE TO THE FACE OF STUD, CONCRETE OR MASONRY UNLESS OTHERWISE NOTED. CONTACT THE ARCHITECT FOR ANY ADDITIONAL DIMENSIONS REQUIRED TO LAY OUT THE WORK.

MASONRY DIMENSIONS ARE THE ACTUAL MASONRY UNIT SIZES UNLESS OTHERWISE REPAIR PATCHED SURFACES THAT ARE DAMAGED. LIFTED. DISCOLORED. OR

SHOWING OTHER IMPERFECTIONS DUE TO PATCHING WORK. IF DEFECTS ARE DUE TO CONDITION OF SUBSTRATE, REPAIR SUBSTRATE PRIOR TO REPAIRING FINISH. WHERE (E) FLOOR IS TO REMAIN, PROTECT FROM DAMAGE. PATCH AND REPAIR ANY HOLES IN CONCRETE SLAB CAUSED BY DEMOLITION OF EXISTING WALLS, (I.E. WALL

PATCH AND REPAIR ANY WALL AND CEILING LOCATIONS WHERE EXISTING ELECTRICAL AND VOICE/DATA OUTLET, JUNCTION BOXES, AND SIMILAR WALL MOUNTED ITEMS ARE REMOVED OR ABANDONED WITHIN THE WORK AREA. PATCH AND REPAIR WALL AND CEILING SURFACES WHERE MODULAR SYSTEMS FURNITURE WAS REMOVED BY SEPARATE CONTRACTOR.

PATCH AND REPAIR ANY WALL LOCATIONS WHERE EXISTING WALL COVERING HAS BEEN REMOVED WITHIN THE WORK AREA. PATCH AND REPAIR ANY WALL LOCATIONS WHERE EXISTING WALL BASE HAS BEEN REMOVED WITHIN THE WORK AREA.

PATCH AND REPAIR ANY WALL LOCATIONS WHERE EXISTING EQUIPMENT, ACCESSORIES, HARDWARE OR OTHER SURFACE MOUNTED ELEMENTS HAVE BEEN REMOVED WITHIN THE WORK AREA

VERIFY LOCATION OF PROX-CARD READERS, AUTOMATIC DOOR OPENERS AND WIRELESS ACTUATORS WITH ARCHITECT DURING ROUGH-IN PHASE OF THE WORK. COORDINATE WITH OWNER FOR ANY CEILING/FLOORING DISRUPTION REGARDING

WALL FILL PATTERNS:

EXISTING WALL ASSEMBLY

NON FIRE-RATED WALL ASSEMBLY

SECURITY 1 <u>S</u>

SHEET TITLE: SOUTH -

FLOOR PLANS

REVISIONS:

DESCRP. DATE 1 ADD 2


ISSUE DATE: 03.15.23

A03-B


DESCRP. DATE 1 ADD 2

ISSUE DATE: 03.15.23


A05-B

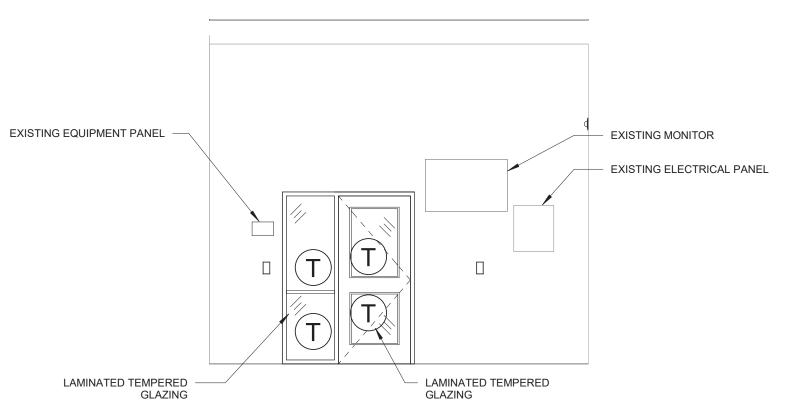


1 HS - SOUTH - VESTIBULE - E

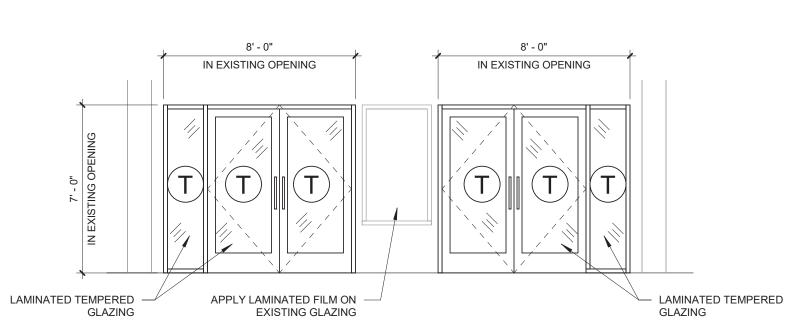


2 HS - SOUTH - VESTIBULE - S

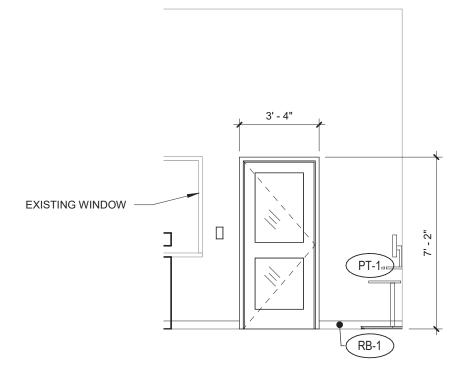


3 HS - SOUTH - MAIN OFFICE - S

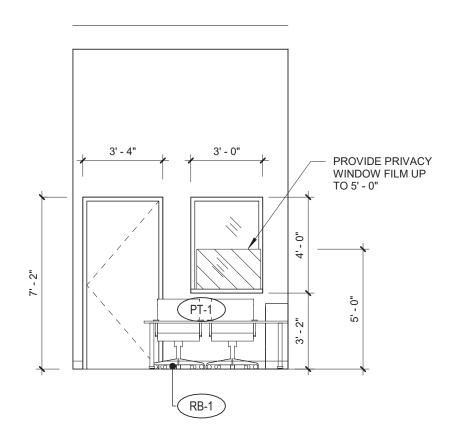


4 HS - SOUTH - OFFICE - S

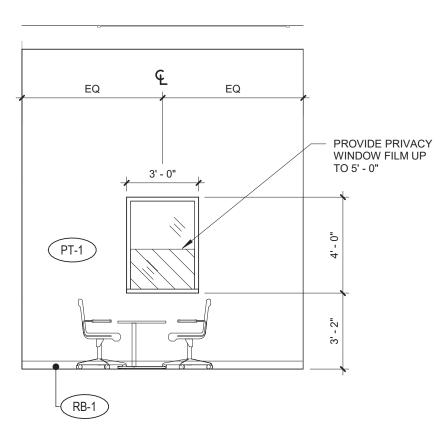


5 HS - SOUTH - OFFICE - W

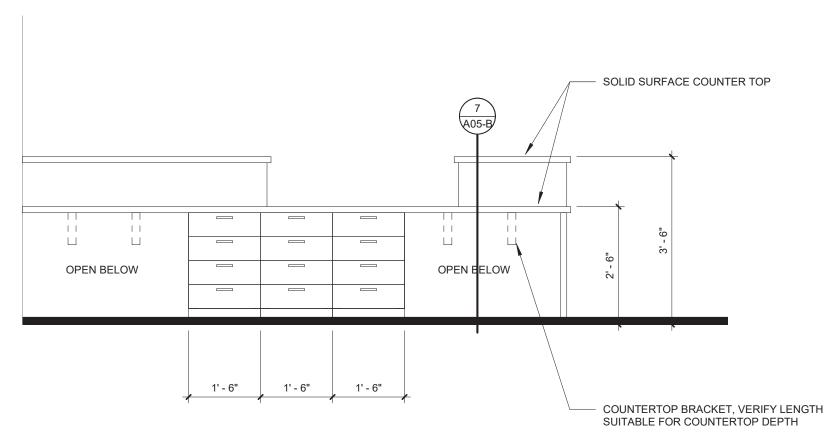


CASEWORK
1/2" = 1'-0"

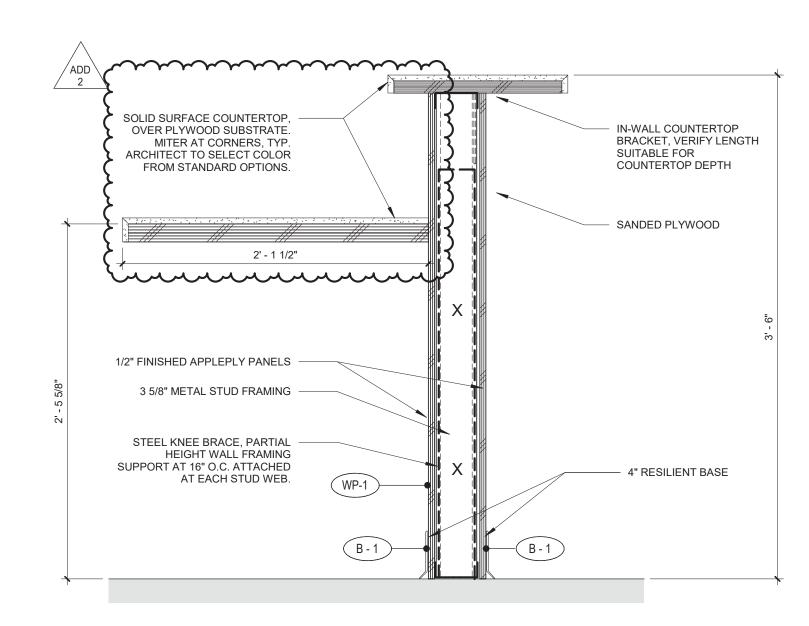



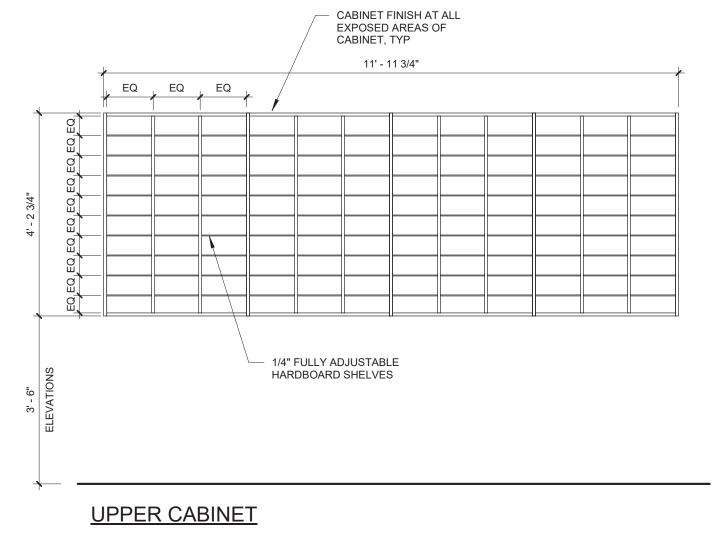


UPPER CABINET WITH MAILBOX SLOTS

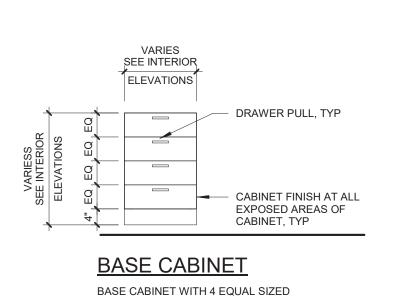


DRAWERS

ONLY)

A06-B

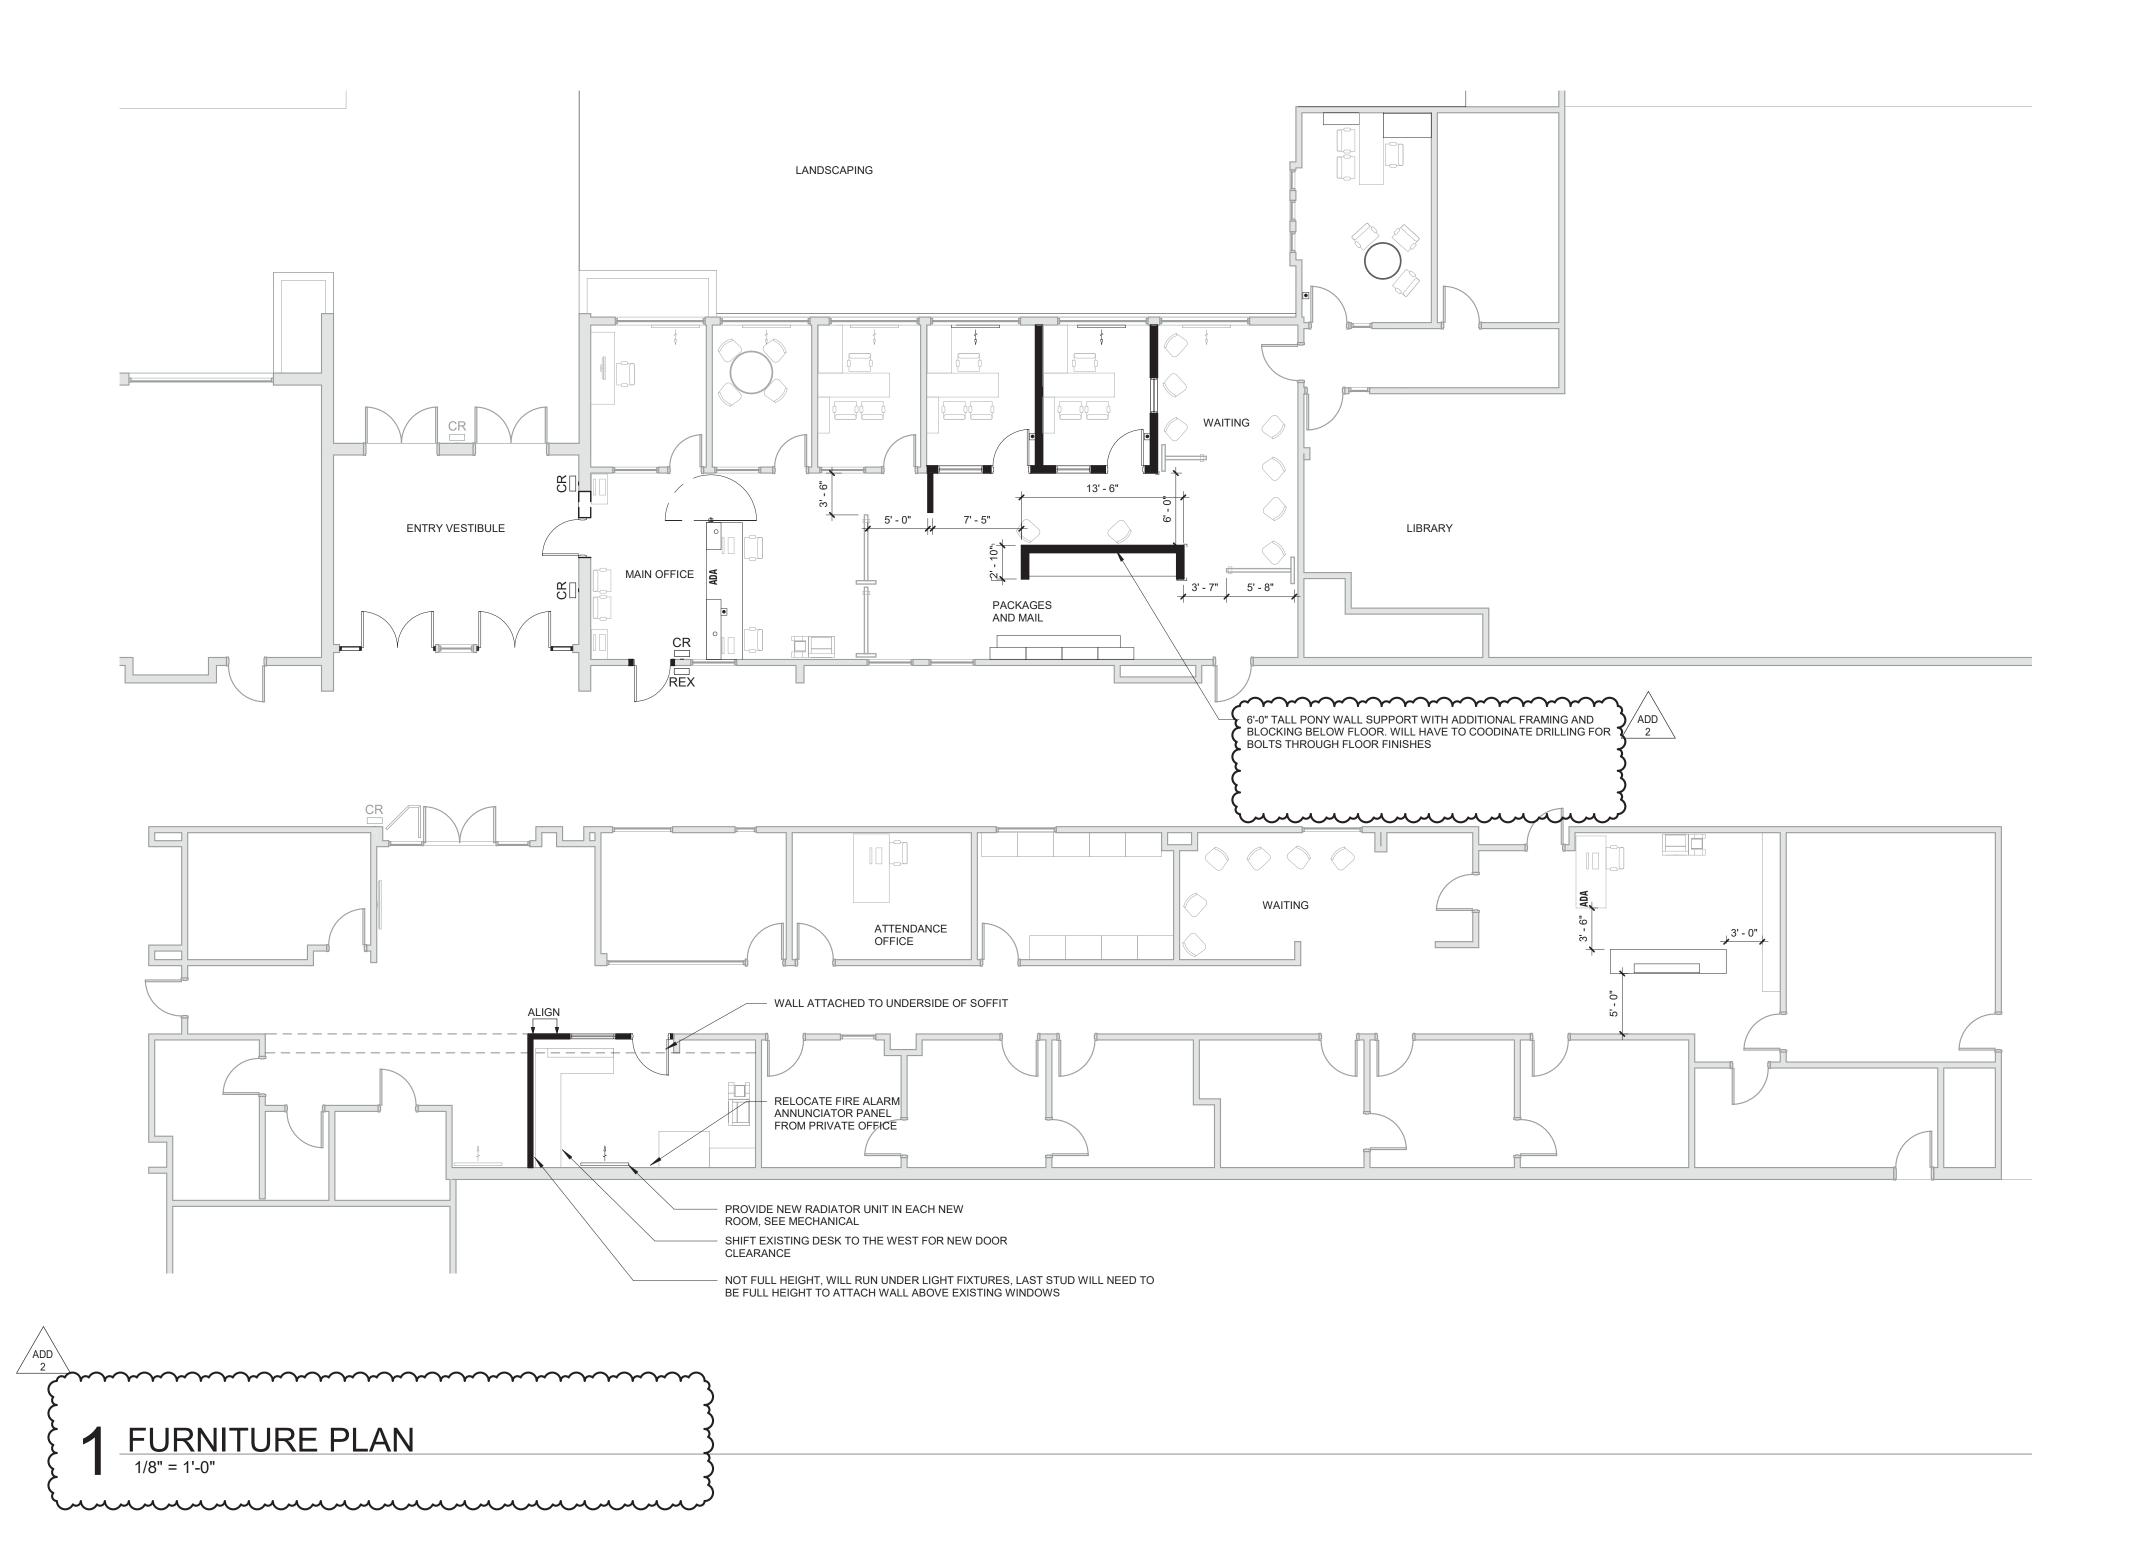



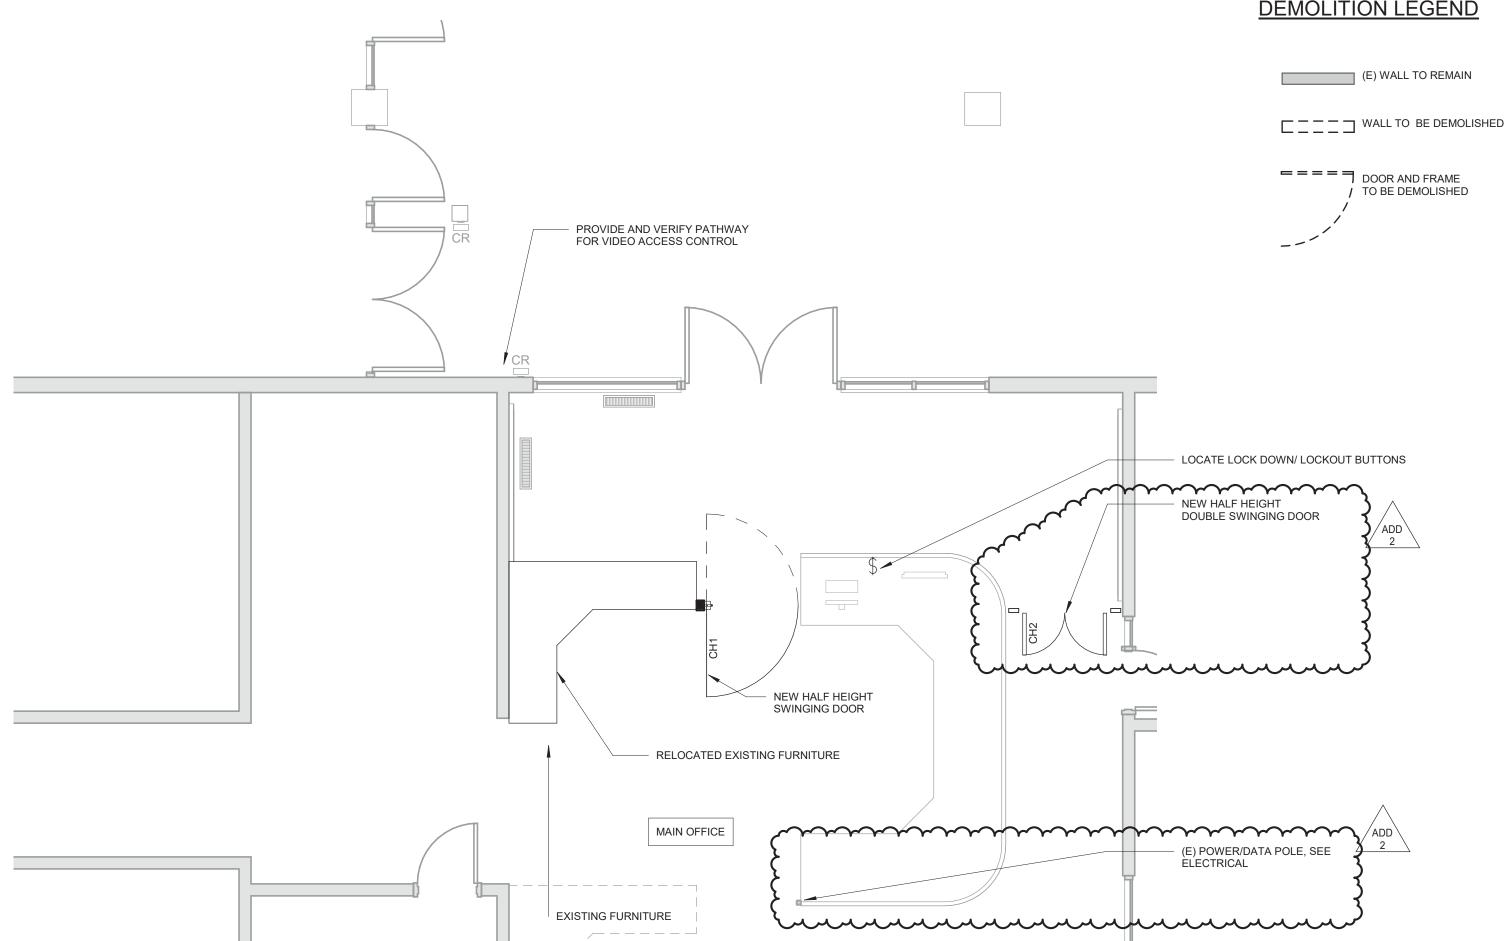

2 FLOOR PLAN - NEW CONSTRUCTION

1/4" = 1'-0"



GENERAL NOTES - DEMOLITION

- A. PROTECT ALL EXISTING CONSTRUCTION TO REMAIN. B. COORDINATE WITH OWNER FOR REMOVAL AND STORAGE OF (E) EQUIPMENT AND CASEWORK TO BE SALVAGED.
- REMOVE EXISTING DOOR WALL STOPS WHERE DOORS NO LONGER EXIST. PROTECT (E) FLOORS, WALLS, CEILINGS & FINISHES TO REMAIN.
- REMOVE AND STORE MATERIAL AND EQUIPMENT WHERE INDICATED TO BE SALVAGED OR RELOCATED.
- WHEN REMOVING FLOOR FINISHES REMOVE ALL ADHESIVE, GROUT, RESIDUE AND
- G. COORDINATE WITH ELECTRICAL FOR ITEMS TO BE DEMOLISHED, REMOVED, AND/OR
- H. COORDINATE WITH MECHANICAL/PLUMBING FOR ITEMS TO BE DEMOLISHED, AND/OR SALVAGED.
- COORDINATE WITH OWNERS MODULAR SYSTEMS FURNITURE CONTRACTOR FOR CHANGES TO FURNITURE AND SYSTEM CASEWORK.
- COORDINATE WITH OWNER FOR ANY CEILING/FLOORING DISRUPTION REGARDING

GENERAL NOTES - FLOOR PLANS

- A. DIMENSIONS SHOWN ARE TO THE FACE OF STUD, CONCRETE OR MASONRY UNLESS OTHERWISE NOTED. CONTACT THE ARCHITECT FOR ANY ADDITIONAL DIMENSIONS REQUIRED TO LAY OUT THE WORK.
- B. MASONRY DIMENSIONS ARE THE ACTUAL MASONRY UNIT SIZES UNLESS OTHERWISE
- REPAIR PATCHED SURFACES THAT ARE DAMAGED, LIFTED, DISCOLORED, OR SHOWING OTHER IMPERFECTIONS DUE TO PATCHING WORK. IF DEFECTS ARE DUE TO
- CONDITION OF SUBSTRATE, REPAIR SUBSTRATE PRIOR TO REPAIRING FINISH. D. WHERE (E) FLOOR IS TO REMAIN, PROTECT FROM DAMAGE. PATCH AND REPAIR ANY HOLES IN CONCRETE SLAB CAUSED BY DEMOLITION OF EXISTING WALLS, (I.E. WALL ANCHORS).
- E. PATCH AND REPAIR ANY WALL AND CEILING LOCATIONS WHERE EXISTING ELECTRICAL AND VOICE/DATA OUTLET, JUNCTION BOXES, AND SIMILAR WALL
- MOUNTED ITEMS ARE REMOVED OR ABANDONED WITHIN THE WORK AREA. F. PATCH AND REPAIR WALL AND CEILING SURFACES WHERE MODULAR SYSTEMS
- FURNITURE WAS REMOVED BY SEPARATE CONTRACTOR. G. PATCH AND REPAIR ANY WALL LOCATIONS WHERE EXISTING WALL COVERING HAS BEEN REMOVED WITHIN THE WORK AREA.
- H. PATCH AND REPAIR ANY WALL LOCATIONS WHERE EXISTING WALL BASE HAS BEEN REMOVED WITHIN THE WORK AREA.
- I. PATCH AND REPAIR ANY WALL LOCATIONS WHERE EXISTING EQUIPMENT, ACCESSORIES, HARDWARE OR OTHER SURFACE MOUNTED ELEMENTS HAVE BEEN REMOVED WITHIN THE WORK AREA
- J. VERIFY LOCATION OF PROX-CARD READERS, AUTOMATIC DOOR OPENERS AND WIRELESS ACTUATORS WITH ARCHITECT DURING ROUGH-IN PHASE OF THE WORK.
- K. COORDINATE WITH OWNER FOR ANY CEILING/FLOORING DISRUPTION REGARDING ACM

DEMOLITION LEGEND

==== DOOR AND FRAME

TO BE DEMOLISHED

4J SECURITY IMPROVEMI PROJECT#: 2207

SHEET TITLE:

CHURCHILL **FLOOR PLAN**

REVISIONS:

DESCRP. DATE 1 ADD 2

ISSUE DATE: 03.15.23

A02-C

