




GLENDALE HIGH SCHOOL BUILDING 11,000 SHADE STRUCTURE

GLENDALE UNIFIED SCHOOL DISTRICT GLENDALE, CALIFORNIA

Architecture
9 PLLLP

8816 Foothill Boulevard, Suite 103-224
Rancho Cucamonga, CA. 91730
A9contact@architecture9.com


ARCHITECTS STAMP:

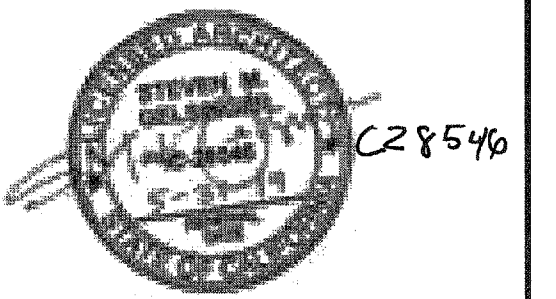

CONSULTANT:

CONSULTANTS STAMP:

AUTHORITY APPROVAL:

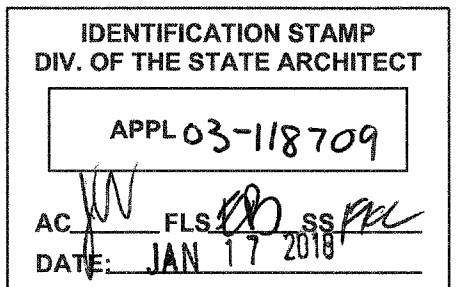

SCHOOL DISTRICT:

**GLENDALE
UNIFIED
SCHOOL
DISTRICT**

PROJECT:
**GLENDALE
HIGH SCHOOL
BUILDING 11,000
SHADE
STRUCTURE**

JOB NUMBER: 10.04.16
DATE: 10.25.17

REVISION: Δ DATE: _____
REVISION: Δ DATE: _____

DRAWING TITLE:
TITLE SHEET

DRAWING NO.:

G1.0

ABBREVIATIONS	
L	ANGLE
AT	AT
CL	CENTERLINE
Ø	DIAMETER OR ROUND
AB	ANCHOR BOLT
AFF.	ABOVE FINISH FLOOR
AG.	ASPHALTIC CONCRETE
ADJ.	ADJACENT
ALUM.	ALUMINUM
APPROX.	APPROXIMATELY
ARCH.	ARCHITECT
BD.	BOARD
BET.	BETWEEN
BLDG.	BUILDING
BLK.	BLOCK
BLKG.	BLOCKING
BM.	BEAM
CAB.	CABINET
C.B.	CATCH BASIN
CF.	CURB FACE
C.J.	CONTROL JOINT
CLG.	CEILING
C.O.	CONCRETE OPENING
COL.	COLUMN
CONC.	CONCRETE
CONC.	CONCRETE MASONRY UNITS
CONTR.	CONTINUOUS
CONTR.	CONTRACTOR
CORR.	CORRIDOR
DET.	DETAIL
D.F.	DRINKING FOUNTAIN
D.G.	DECOMPOSED GRANITE
DIA.	DIAMETER
DIM.	DIMENSION
DIV.	DIVISION
DN.	DOWN
DBL.	DOUBLE
D.S.	DOWNPOUT
DWG.	DRAWING
(E)	EXISTING
EA.	EACH
E.J.	EXPANSION JOINT
ELEC.	ELECTRIC
ELEV.	ELEVATION
ENT.	ENTRANCE
EMER.	EMERGENCY
ENCL.	ENCLOSURE
EQ.	EQUAL
EQUIP.	EQUIPMENT
EG.	EXISTING GRADE
EXPO.	EXPOSED
EXP.	EXPANSION
EXT.	EXTERIOR
F.A.	FLOOR DRAIN
F.B.	FIRE EXTINGUISHER
F.B.C.	FIRE EXTINGUISHER CABINET
F.C.	FINISH FLOOR
F.D.	FINISH GRADE
F.E.	FIRE HYDRANT
F.L.W.S.	FLATHEAD WOOD SCREWS
FIN.	FINISH
F.L.	FLOW LINE
FLASH.	FLASHING
FLUOR.	FLUORESCENT
F.O.A.	FACE OF CONCRETE
F.O.F.	FACE OF FINISH
F.O.M.	FACE OF MASONRY
F.O.S.	FACE OF STUD
F.O.V.	FACE OF VENEER
F.R.A.	FIRE RATED ASSEMBLY
F.R.P.	FIBERGLASS REINFORCED
PANELS	
F.S.	FLOOR SINK
F.T.	FOOT OR FEET
FURR.	FURRING
G.A.	GAUGE
GALV.	GALVANIZED
G.I.	GALVANIZED IRON
GL.	GLASS
GLU LAM.	GLUE LAMINATED
GND.	GROUND
GR.	GRADE
GR.A.	GYPSONUM
H.B.	HOSE BIB
H.M.	HOLLOW METAL
HORIZ.	HORIZONTAL
HR.	HOUR
HT.	HEIGHT
HTG.	HEATING
HDWD.	HARDWOOD
I.D.	INSIDE DIAMETER
INSUL.	INSULATION
INT.	INTERIOR
INV.	INVERT
JAN.	JANITOR
LAB.	LABORATORY
FLAM.	LAMINATED PLASTIC
LAV.	LAVATORY
LVR.	LOUVER
MAR.	MARBLE
MAT'L	MATERIAL
MAX.	MAXIMUM
MC.	MEDICINE CABINET
M.B.	METAL CORNER BEAD
MECH.	MECHANICAL
MET.	METAL
MFR.	MANUFACTURER
MIN.	MINIMUM
MISC.	MISCELLANEOUS
MO.	MASONRY OPENING
MTD.	MOUNTED
MUL.	MULLION
N.	NORTH
NAT.	NATURAL
NG.	NATURAL GRADE
N.I.A.	NOT IN CONTRACT
NO. / *	NUMBER
NOM.	NOMINAL
N.T.S.	NOT TO SCALE
O.A.	OVERALL
OBSC.	OBSCURE
O.C.	ON CENTER
O.D.	OUTSIDE DIAMETER
O.H.	OPPOSITE HAND
OPG.	OPENING
OSA.	OUTSIDE AIR
PART.	PARTITION
P.H.	PANIC HARDWARE
PL.	PLATE
P.L.	PROPERTY LINE
PLAS.	PLASTIC
FLYWOOD.	PLYWOOD
FR.	FAIR
R.	RISER
RB.	RUBBER BASE
RAD.	RADIUS
REDWD.	REDWOOD
REF.	REFERENCE
RESIL.	RESILIENT
REV.	REVERSE
RM.	ROOM
R.O.	ROUGH OPENING
REFR.	REFRIGERATOR
REG.	REGISTER
REINF.	REINFORCEMENT
REQ'D	REQUIRED
ROUGH	ROUGH
S.	SOUTH
S.B.	SPLASH BLOCK
S.D.	STORY DRAIN
S.C.	SOLID CORE
SCHED.	SCHEDULE
SECT.	SECTION
SHT.	SHEET
SHT.	SHEET-LAR
S.J.	SAW OR SCORE JOINT
S.L.D.G.	SLIDING
S.M.	SMOOTH FACE
S.M.S.	SHEET-METAL SCREW
SPEC.	SPECIFICATIONS
S.P.	SPLIT FACE
S.Q.	SQUARE
S.S.	SERVICE SINK
SST.	STAINLESS STEEL
STAT.	STATIONARY
STD.	STANDARD
STL.	STEEL
STRUCT.	STRUCTURAL
SUSP.	SUSPENDED
SYM.	SYMMETRICAL
T.	TREAD
T.B.	TACKBOARD
T.B.	TOP AND BOTTOM
T.C.	TOP OF CURB
T.D.	TOWEL DISPENSER
T.G.	TOP OF GRADE
T.O.W.	TOP OF MASONRY
T.O.R.	TOP OF ROOFING
T.O.S.	TOP OF SHEATHING
T.P.	TOP OF PAVING
T.W.	TOP OF WALL
TEL.	TELEPHONE
TEMP.	TEMPERATURE
TR.	TRANSOM
TYP.	TYPICAL
UNO.	UNLESS NOTED
OTHERWISE	
U.O.F.	UNDERSIDE OF FRAME
URINAL	URINAL
VAR.	VARIES
V.C.T.	VINYL COMPOSITION
TILE	TILE
VERT.	VERTICAL
VEST.	VESTIBULE
VERIFY IN FIELD	
W.	WITH
W.C.	WATER CLOSET
W.	WOOD
W.	WROUGHT IRON

GENERAL NOTES

- VERIFY ALL DIMENSIONS, LOCATIONS OF EXISTING UTILITIES, AND CONDITIONS ON JOB SITE PRIOR TO START OF WORK OR PORTIONS OF WORK. NOTIFY ARCHITECT IMMEDIATELY OF ANY DISCREPANCIES BETWEEN ACTUAL FIELD CONDITIONS AND CONSTRUCTION DOCUMENTS. EXISTING CONDITIONS ARE INDICATED AS RESULT OF FIELD OBSERVATIONS, INFORMATION SHOWN ON AVAILABLE DOCUMENTS AND FIELD CONDITIONS AT TIME OF PREPARATION.
- NOT ALL MECHANICAL, PLUMBING, AND ELECTRICAL ITEMS MAY BE SHOWN ON THE ARCHITECTURAL DRAWINGS.
- ALL MATERIALS AND WORKMANSHIP SHALL COMPLY WITH ALL GOVERNING CODES, ORDINANCES, REGULATIONS AND LAWS.
- WHERE ANY CONFLICT OCCURS BETWEEN REQUIREMENTS OF LAWS, CODES, ORDINANCES, RULES AND REGULATIONS, THE MOST STRINGENT SHALL GOVERN.
- IN NO CASE SHALL WORKING DIMENSIONS BE SCALED FROM PLANS, SECTIONS OR DETAILS ON THE DRAWINGS.
- DETAILS MARKED WITH 'TYPICAL' SHALL APPLY IN ALL CASES UNLESS SPECIFICALLY NOTED OTHERWISE.
- ENACT ALL MEASURES TO PROTECT AND SAFEGUARD ALL EXISTING ELEMENTS TO REMAIN FROM BEING DAMAGED. REPLACE OR REPAIR EXISTING ELEMENTS DAMAGED BY THE EXECUTION OF THIS CONTRACT TO EQUAL OR BETTER CONDITION.
- CONTRACTOR SHALL COORDINATE BETWEEN THE REQUIREMENTS OF ALL DISCIPLINES HEREIN AND BETWEEN DRAWING AND SPECIFICATION REQUIREMENTS IN ORDER THAT ALL ITEMS RELATE TO ONE ANOTHER. NOTIFY ARCHITECT IMMEDIATELY REGARDING ANY ITEMS NOT COORDINATED.
- THE INTENT OF THESE DRAWINGS AND SPECIFICATIONS IS THAT THE WORK OF CONSTRUCTION, ALTERATION, REHABILITATION OR RECONSTRUCTION SHALL CONFORM TO TITLE 24, CALIFORNIA CODE OF REGULATION (CCR). SHOULD ANY EXISTING CONDITIONS SUCH AS DETERIORATION OR NON-COMPLYING CONSTRUCTION BE DISCOVERED WHICH IS NOT COVERED BY THE CONTRACT DOCUMENTS WHEREIN THE FINISHED WORK WILL NOT COMPLY WITH THE TITLE 24, CALIFORNIA CODE OF REGULATIONS, A CHANGE ORDER OR A SEPARATE SET OF PLANS AND SPECIFICATIONS, DETAILING AND SPECIFYING THE REQUIRED WORK SHALL BE SUBMITTED TO AND APPROVED BY THE DIVISION OF THE STATE ARCHITECT BEFORE PROCEEDING WITH THE WORK.
- CONTRACTOR SHALL STOP WORK AND NOTIFY ARCHITECT IMMEDIATELY IF ANY ASBESTOS CONTAINING MATERIAL (ACM) OR SUSPECTED ACM IS FOUND DAMAGED OR DISTURBED.
- CONTRACTOR SHALL EXERCISE EXTREME CAUTION IN EXCAVATING AND TRENCHING ON THIS SITE TO AVOID EXISTING DUCTS, PIPING, CONDUIT, ETC. AND TO PREVENT HAZARD TO PERSONNEL AND/OR TO EXISTING UNDERGROUND UTILITIES OR STRUCTURES. THE DESIGN PROFESSIONALS ARE NOT RESPONSIBLE FOR THE LOCATION OF UNDERGROUND UTILITIES OR STRUCTURES, WHETHER OR NOT SHOWN ON AND INSTALLED BY THESE CONTRACT DOCUMENTS. THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE DISTRICT SHOULD SUCH UNIDENTIFIED CONDITIONS BE DISCOVERED. THESE DRAWINGS AND SPECIFICATIONS DO NOT INCLUDE THE NECESSARY COMPONENTS FOR CONSTRUCTION SAFETY.
- CHANGES TO THE APPROVED DRAWINGS AND SPECIFICATIONS SHALL BE MADE BY ADDENDA OR A CHANGE ORDER APPROVED BY DIVISION OF THE STATE ARCHITECT, AS REQUIRED BY SECTION 4-338, PART 1, TITLE 24, CCR.

DSA CLOSE OUT STATUS

BUILDING	DSA NO	CERTIFICATION STATUS	DATE
1000	27211/03-110374	#2	3.12.14
2000	27211/03-110374	#2	3.12.14
3000	27211/03-110374	#2	3.12.14
4000	55157	UNKNOWN	
5000	27211	UNKNOWN	
6000	27211/03-110374	#2	3.12.14
7000	27211/03-110374	#2	3.12.14
8000	27211/03-110374	#2	3.12.14
9000	27211	UNKNOWN	
10,000	03-114356	UNDER CONSTRUCTION	
11,000	03-114356	UNDER CONSTRUCTION	

CODE ANALYSIS

BUILDING GROUP	OCCUPANCY CLASS	NO. OF STORIES	TYPE OF CONSTRUCTION	SPRINKLERED	ALLOWABLE SQ. FT.	ACTUAL SQ. FT.
SHADE STRUCTURE	A-3	1	V-B	NO	9,500	264
	E	1	II-B	YES	14,500	4,918
TOTAL					14,500	5,182

APPLICABLE CODES

CONSTRUCTION SHALL COMPLY WITH THE FOLLOWING SECTIONS OF THE CALIFORNIA CODE OF REGULATIONS (CCR).

LIST OF 2016 CALIFORNIA CODE OF REGULATIONS (C.C.R.):

APPLICABLE CODES AS OF JANUARY 1, 2017

PART 1 2016 CALIFORNIA BUILDING STANDARDS ADMINISTRATIVE CODE, TITLE 24 C.C.R.

PART 2 2016 CALIFORNIA BUILDING CODE, TITLE 24 C.C.R.

PART 3 2016 CALIFORNIA ELECTRICAL CODE, TITLE 24 C.C.R.

PART 4 2016 CALIFORNIA MECHANICAL CODE, TITLE 24 C.C.R.

PART 5 2016 CALIFORNIA PLUMBING CODE, TITLE 24 C.C.R.

PART 6 2016 CALIFORNIA ENERGY CODE, TITLE 24 C.C.R.

PART 7 NOT USED

PART 8 2016 CALIFORNIA HISTORICAL BUILDING CODE, TITLE 24 C.C.R.

PART 9 2016 CALIFORNIA FIRE CODE, TITLE 24 C.C.R.

PART 10 2016 CALIFORNIA EXISTING BUILDING CODE, TITLE 24 C.C.R.

PART 11 2016 CALIFORNIA GREEN BUILDING STANDARDS CODE (CALGREEN CODE), TITLE 24 C.C.R.

PART 12 2016 CALIFORNIA REFERENCED STANDARDS CODE, TITLE 24 C.C.R.

TITLE 19 C.C.R., PUBLIC SAFETY, STATE FIRE MARSHAL REGULATIONS

PARTIAL LIST OF APPLICABLE STANDARDS

2016 CALIFORNIA BUILDING CODE (FOR SFP) REFERENCED STANDARDS CHAPTER 35

NFPA 13 AUTOMATIC SPRINKLER SYSTEMS (CALIFORNIA AMENDED) 2016 EDITION

NFPA 14 STANDPIPE SYSTEMS (CALIFORNIA AMENDED) 2016 EDITION

NFPA 11 DRY CHEMICAL EXTINGUISHING SYSTEMS 2016 EDITION

NFPA 17A WET CHEMICAL SYSTEMS 2016 EDITION

NFPA 20 STATIONARY PUMPS 2016 EDITION

NFPA 24 PRIVATE FIRE SERVICE MAINS (CALIFORNIA AMENDED) 2016 EDITION

NFPA 72 NATIONAL FIRE ALARM CODE (CALIFORNIA AMENDED) 2016 EDITION

NFPA 80 FIRE DOOR AND OTHER OPENING PROTECTIVES 2016 EDITION

NFPA 253 CRITICAL RADIANT FLUX OF FLOOR COVERING SYSTEMS 2016 EDITION

NFPA 2001 CLEAN AGENT FIRE EXTINGUISHING SYSTEMS 2016 EDITION

CBC SECTION 7A SHALL BE ENFORCED ON THIS PROJECT

DSA INSPECTOR

A CLASS 3 PROJECT INSPECTOR EMPLOYED BY THE DISTRICT (OWNER) AND APPROVED BY THE DIVISION OF THE STATE ARCHITECT SHALL PROVIDE CONTINUOUS INSPECTION OF THE WORK. THE DUTIES OF THE INSPECTOR ARE DEFINED IN SECTIONS 4-342, PART 1, TITLE 24, CCR.

PROJECT DIRECTORY

DISTRICT
GLENDALE UNIFIED SCHOOL DISTRICT
1440 EAST BROADWAY
GLENDALE, CA. 91205

SCHOOL
GLENDALE HIGH SCHOOL
1440 EAST BROADWAY
GLENDALE, CALIFORNIA 91205



ARCHITECT
ARCHITECTURE 9, PLLLP
8816 FOOTHILL BOULEVARD, SUITE 103-224
RANCHO CUCAMONGA, CA. 91730
contact@architecture9.com

INDEX OF DRAWINGS

GENERAL
G1.0 TITLE SHEET
G1.1 FIRE ACCESS SITE PLAN

ARCHITECTURAL
A1.1 SITE PLAN
A1.2 ENLARGED SITE PLANS & DETAILS

PRE-FABRICATED SHADE STRUCTURE
POLYGON DSA P.C. 02-113594
FD1.0 GENERAL NOTES
FD1.1 SPECIAL INSTRUCTIONS
FD2.0 FOUNDATION PLAN
FD3.0 FRAMING PLAN
FD4.0 FRAMING CONNECTION DETAILS
FD5.0 SECTION DETAILS
FD6.0 PLATE DETAILS
FD7.0 ARCHITECTURAL VIEWS
FD8.0 ROOF CONNECTION DETAILS
FD9.0 MISC. DESIGN OPTIONS

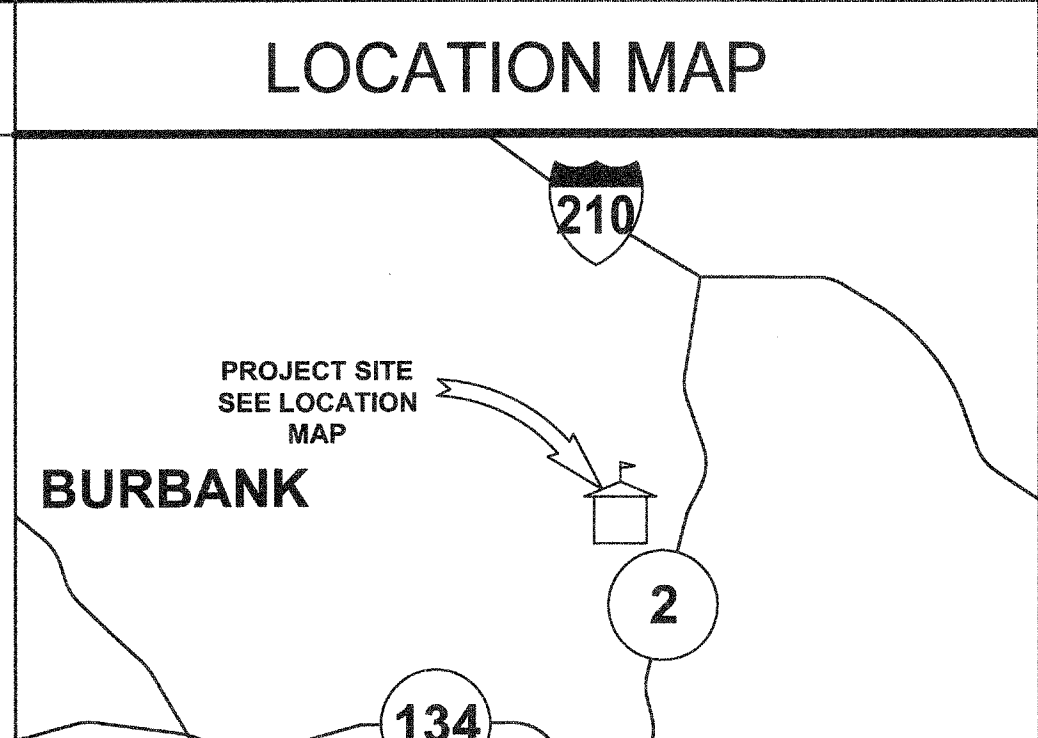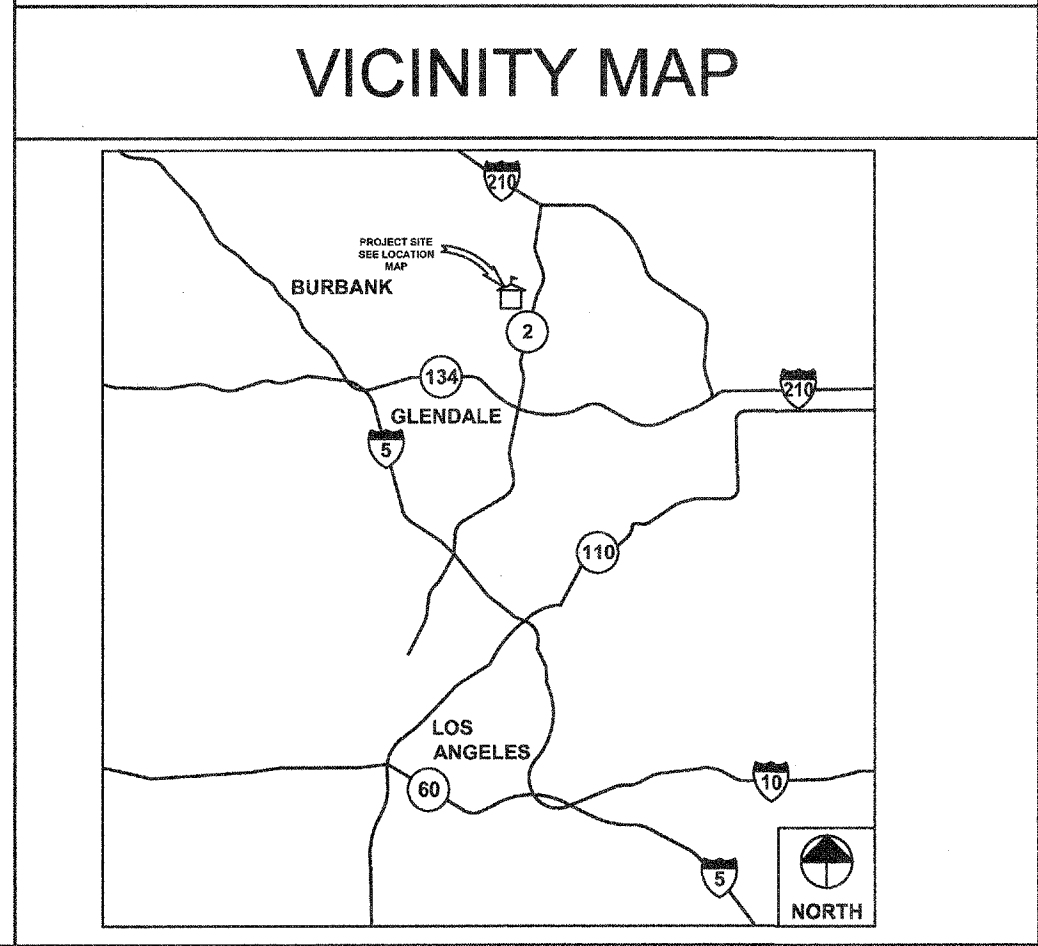

PROJECT DESCRIPTION

DISTRICT FURNISHED AND CONTRACTOR INSTALLED 12'x22'x9' PRE-FABRICATED METAL FABRIC SHADE STRUCTURE

This project cannot be certified until 03-114356 is certified.

A/E STATEMENT

THESE DRAWINGS AND/OR SPECIFICATIONS AND/OR CALCULATIONS FOR THE ITEMS LISTED BELOW HAVE BEEN PREPARED BY OTHER DESIGN PROFESSIONALS OR CONSULTANTS WHO ARE LICENSED AND/OR AUTHORIZED TO PREPARE SUCH DRAWINGS IN THIS STATE. THESE DOCUMENTS HAVE BEEN EXAMINED BY ME FOR DESIGN INTENT AND APPEAR TO MEET THE APPROPRIATE REQUIREMENTS OF TITLE 24, CALIFORNIA CODE OF REGULATIONS AND THE PROJECT SPECIFICATIONS PREPARED BY ME.

THE ITEMS LISTED BELOW HAVE BEEN COORDINATED WITH MY PLANS AND SPECIFICATIONS AND ARE ACCEPTABLE FOR INCORPORATION INTO THE CONSTRUCTION OF THIS PROJECT FOR WHICH I AM THE INDIVIDUAL DESIGNATED TO BE IN GENERAL RESPONSIBLE CHARGE.

PRE-FABRICATED METAL SHADE STRUCTURE SEE DRAWINGS LISTED ABOVE.

S. Mark Gelinger 1-4-18
SIGNATURE: DATE:

STEVEN M. GELINGER
LICENSE NO.: C28846
EXPIRATION DATE: MAY 31, 2019

PROJECT DESCRIPTION

DISTRICT FURNISHED AND CONTRACTOR INSTALLED 12'x22'x9' PRE-FABRICATED METAL FABRIC SHADE STRUCTURE

This project cannot be certified until 03-114356 is certified.

1 FIRE AUTHORITY SITE PLAN

SCALE: 1" = 60'-0"



KEYNOTES

- EXISTING FIRE HYDRANT
- EXISTING PARKING AREA
- EXISTING HARDCOURT
- EXISTING FIRE ACCESS MAP
- EXISTING FIRE LANE ENTRANCE SIGN AND KNOX BOX
- EXISTING 20'-0" WIDE FIRE LANE STRIPING (SHOWN DASHED)
- EXISTING 11'-0" WIDE GATE WITH NEW KNOX BOX

CODE ANALYSIS

BUILDING GROUP	OCCUPANCY CLASS	NO. OF STORIES	TYPE OF CONSTRUCTION	SPRINKLERED	ALLOWABLE SQ. FT.	ACTUAL SQ. FT.
METAL SHADE STRUCTURE	A-3	1	V-B	NO	6000	264
BUILDING 11000	E	1	II-B	YES	14,500	4,918
TOTAL					14,500	5,182

*NOTE 1: ACTUAL BUILDING AREA INCLUDES AREAS WITHIN THE HORIZONTAL PROJECTION ON THE ROOF OR FLOOR ABOVE.
 NONE SEPARATED USE ANALYSIS.
 SHADE STRUCTURE TYPE VB IS THE MORE STRINGENT REQUIREMENT.
 MAX ALLOWABLE AREA IS 6000 (NS) > 5182 ACTUAL

LEGEND

- NEW 12'X22' METAL SHADE STRUCTURE
- EXISTING BUILDING
- EXISTING FIRE LANE

FIRE DEPARTMENT NOTES

- ACCESS DURING CONSTRUCTION: FIRE APPARATUS ACCESS ROADS SHALL BE INSTALLED AND MADE SERVICEABLE PRIOR TO AND DURING THE TIME OF CONSTRUCTION EXCEPT WHEN APPROVED ALTERNATIVE METHODS OF PROTECTION ARE PROVIDED (SEE CFC SECTION 501.4)
- REQUIRED INSPECTIONS:
 - GLENDALE FIRE PREVENTION FINAL INSPECTION (PRIOR TO OCCUPANCY): TO VERIFY INSTALLATION OF ADEQUATE FIRE DEPARTMENT ACCESS AND SIGNAGE, AS INDICATED ON THIS PLAN, CONTACT THE GLENDALE FIRE DEPARTMENT AT (818) 548-4810 TO SCHEDULE A SITE VISIT AND INSPECTION PRIOR TO OCCUPANCY.
 - FIRE SAFETY DURING CONSTRUCTION AND DEMOLITION INSPECTION: THIS INSPECTION WILL INCLUDE A REVIEW OF THE ACCESS REQUIRED FOR FIRE FIGHTING IN CFC SECTION 1410 AND FIRE DEPARTMENT SIGNAGE (TO FACILITATE ACCESS DURING CONSTRUCTION), AND THE WATER SUPPLY AVAILABLE DURING CONSTRUCTION REQUIRED IN CFC SECTION 1412.
 - THE CONTRACTOR SHALL FURNISH AND INSTALL ALL WORK AND ITEMS SHOWN AND CALLED FOR IN THIS DRAWING.
 - ALL WORK SHALL CONFORM TO THE REQUIREMENTS OF THE CITY OF GLENDALE FIRE DEPARTMENT.

Dan Hensiek

From: Halpert, Jeffrey <JHalpert@Glendaleca.gov>
Sent: Wednesday, December 13, 2017 1:50 PM
To: Dan Hensiek
Cc: Demirjian, Sita
Subject: Re: FGP1724678, FGP1724674, FGP1724677

For such small structures we deemed the fire flow to be unnecessary. Prior projects far dwarf these and fire flow at these sites have been established.

PER NFPA SECTION 8.15.7.2 AS REVISED BY CFC CHAPTER 35 PAGE 556
 "SPRINKLERS SHALL BE PERMITTED TO BE OMITTED WHERE THE EXTERIOR CANOPIES, ROOFS, PORTA-COCHERES, BALCONIES, DECK, OR SIMILAR PROJECTIONS ARE CONSTRUCTED WITH MATERIALS THAT ARE NON-COMBUSTIBLE, LIMITED COMBUSTIBLE OR FIRE RESISTANT TREATED WOOD AS DEFINED IN NFPA 703.

SCOPE OF WORK:

12' X 22' METAL SHADE STRUCTURE
 THE PROVISIONS OF CFC 2016 CHAPTER 7A SHALL APPLY TO THIS PROJECT.

810 LOCAL FIRE AUTHORITY REVIEW

To facilitate the Division of the State Architect's (DSA) approval of the Fire/Life Safety portion of a project, DSA requires Local Fire Authority (LFA) review of certain elements as identified in this form. Use of this form is mandatory for projects that add square footage to a campus or if any item on this form is relevant to the project. For additional information, see DSA 810 Instructions and DSA Policy 09-01.

PROJECT INFORMATION

School District: **GLENDALE UNIFIED SCHOOL DISTRICT**
 Project Name/School: **GLENDALE HIGH SCHOOL**
 Project Address: **1440 E. BROADWAY, GLENDALE, CA 91205**

LFA Agency Name: **GLENDALE FIRE DEPARTMENT**
 LFA Reviewer Name: **SITA DEMIRJIAN**
 Email: **CDemirjian@glendaleca.gov** Telephone Number: **818-987-8905**

Note: Only sign this form when it is approved by the fire department. A license fee is not applicable to DSA.
 LFA Reviewer's Signature: *[Signature]* Date: **12/17/17**
 Review Key: "Y" = Complies with LFA requirements "N" = Not approved (complete Section 8)
 "NA" = Not applicable to the project "NR" = LFA elects not to review

Item	Description	Complies
1	Where an elevator does not meet medical emergency service cab size, per the California Building Code (CBC), use of stairways for emergency rescue and patient transport is acceptable.	<input checked="" type="checkbox"/>
2	Access roads, fire lane markings, pavers and gate entrances are in accordance with Title 19, California Code of Regulations and the California Fire Code, Chapter 5.	<input checked="" type="checkbox"/>
3	Fire hydrant location and distribution complies with NFPA 1142, "Alternate Means," if "NR" is checked, DSA can only approve on-site water storage as an alternate. The signature of the school district official is required to acknowledge the use of alternate means.	<input checked="" type="checkbox"/>


Signature of School District Official: _____ Date: _____
 Print the School District Official's Name: _____
 The location(s) of the proposed post indicator valve and fire department connection meet the requirements of this jurisdiction.
 The location(s) of the detector check valve assembly meet the requirements of this jurisdiction.
 Is the project located in a hazard severity zone area? (CBC, Chapter 7A, Section 701A.) Yes No
 Check type if "Yes": Moderate High Very High WIFA
 (If one of these boxes is checked, the project design must meet the requirements of Chapter 7A.)
 COMMENTS (note deficiencies): **GFD believes shade structure should be fire sprinklered due to close proximity to existing sprinklered building. We defer action on this item to DSA.**

Architecture

9 PLLLP

8816 Foothill Boulevard, Suite 103-224
 Rancho Cucamonga, CA. 91730
 A9contact@architecture9.com


ARCHITECTS STAMP:

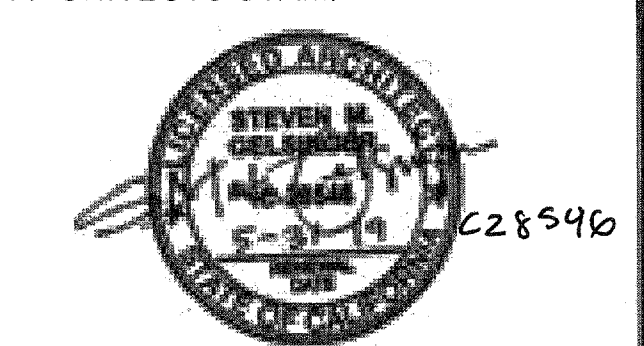

CONSULTANT:

CONSULTANTS STAMP:

AUTHORITY APPROVAL:

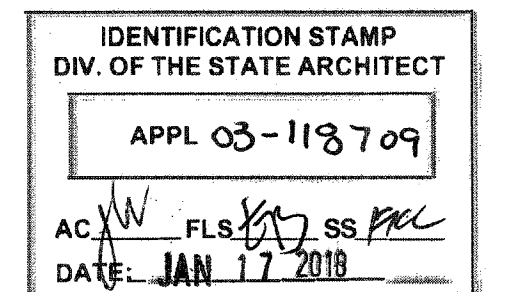

SCHOOL DISTRICT:

GLENDALE UNIFIED SCHOOL DISTRICT

PROJECT:

GLENDALE HIGH SCHOOL BUILDING 11,000 SHADE STRUCTURE

1440 E. Broadway, Glendale, CA 91205

JOB NUMBER: 10.04.06

DATE: 10.25.17

REVISION: DATE: _____


REVISION: DATE: _____

DRAWING TITLE:

FIRE AUTHORITY SITE PLAN

DRAWING NO.:

G1.1

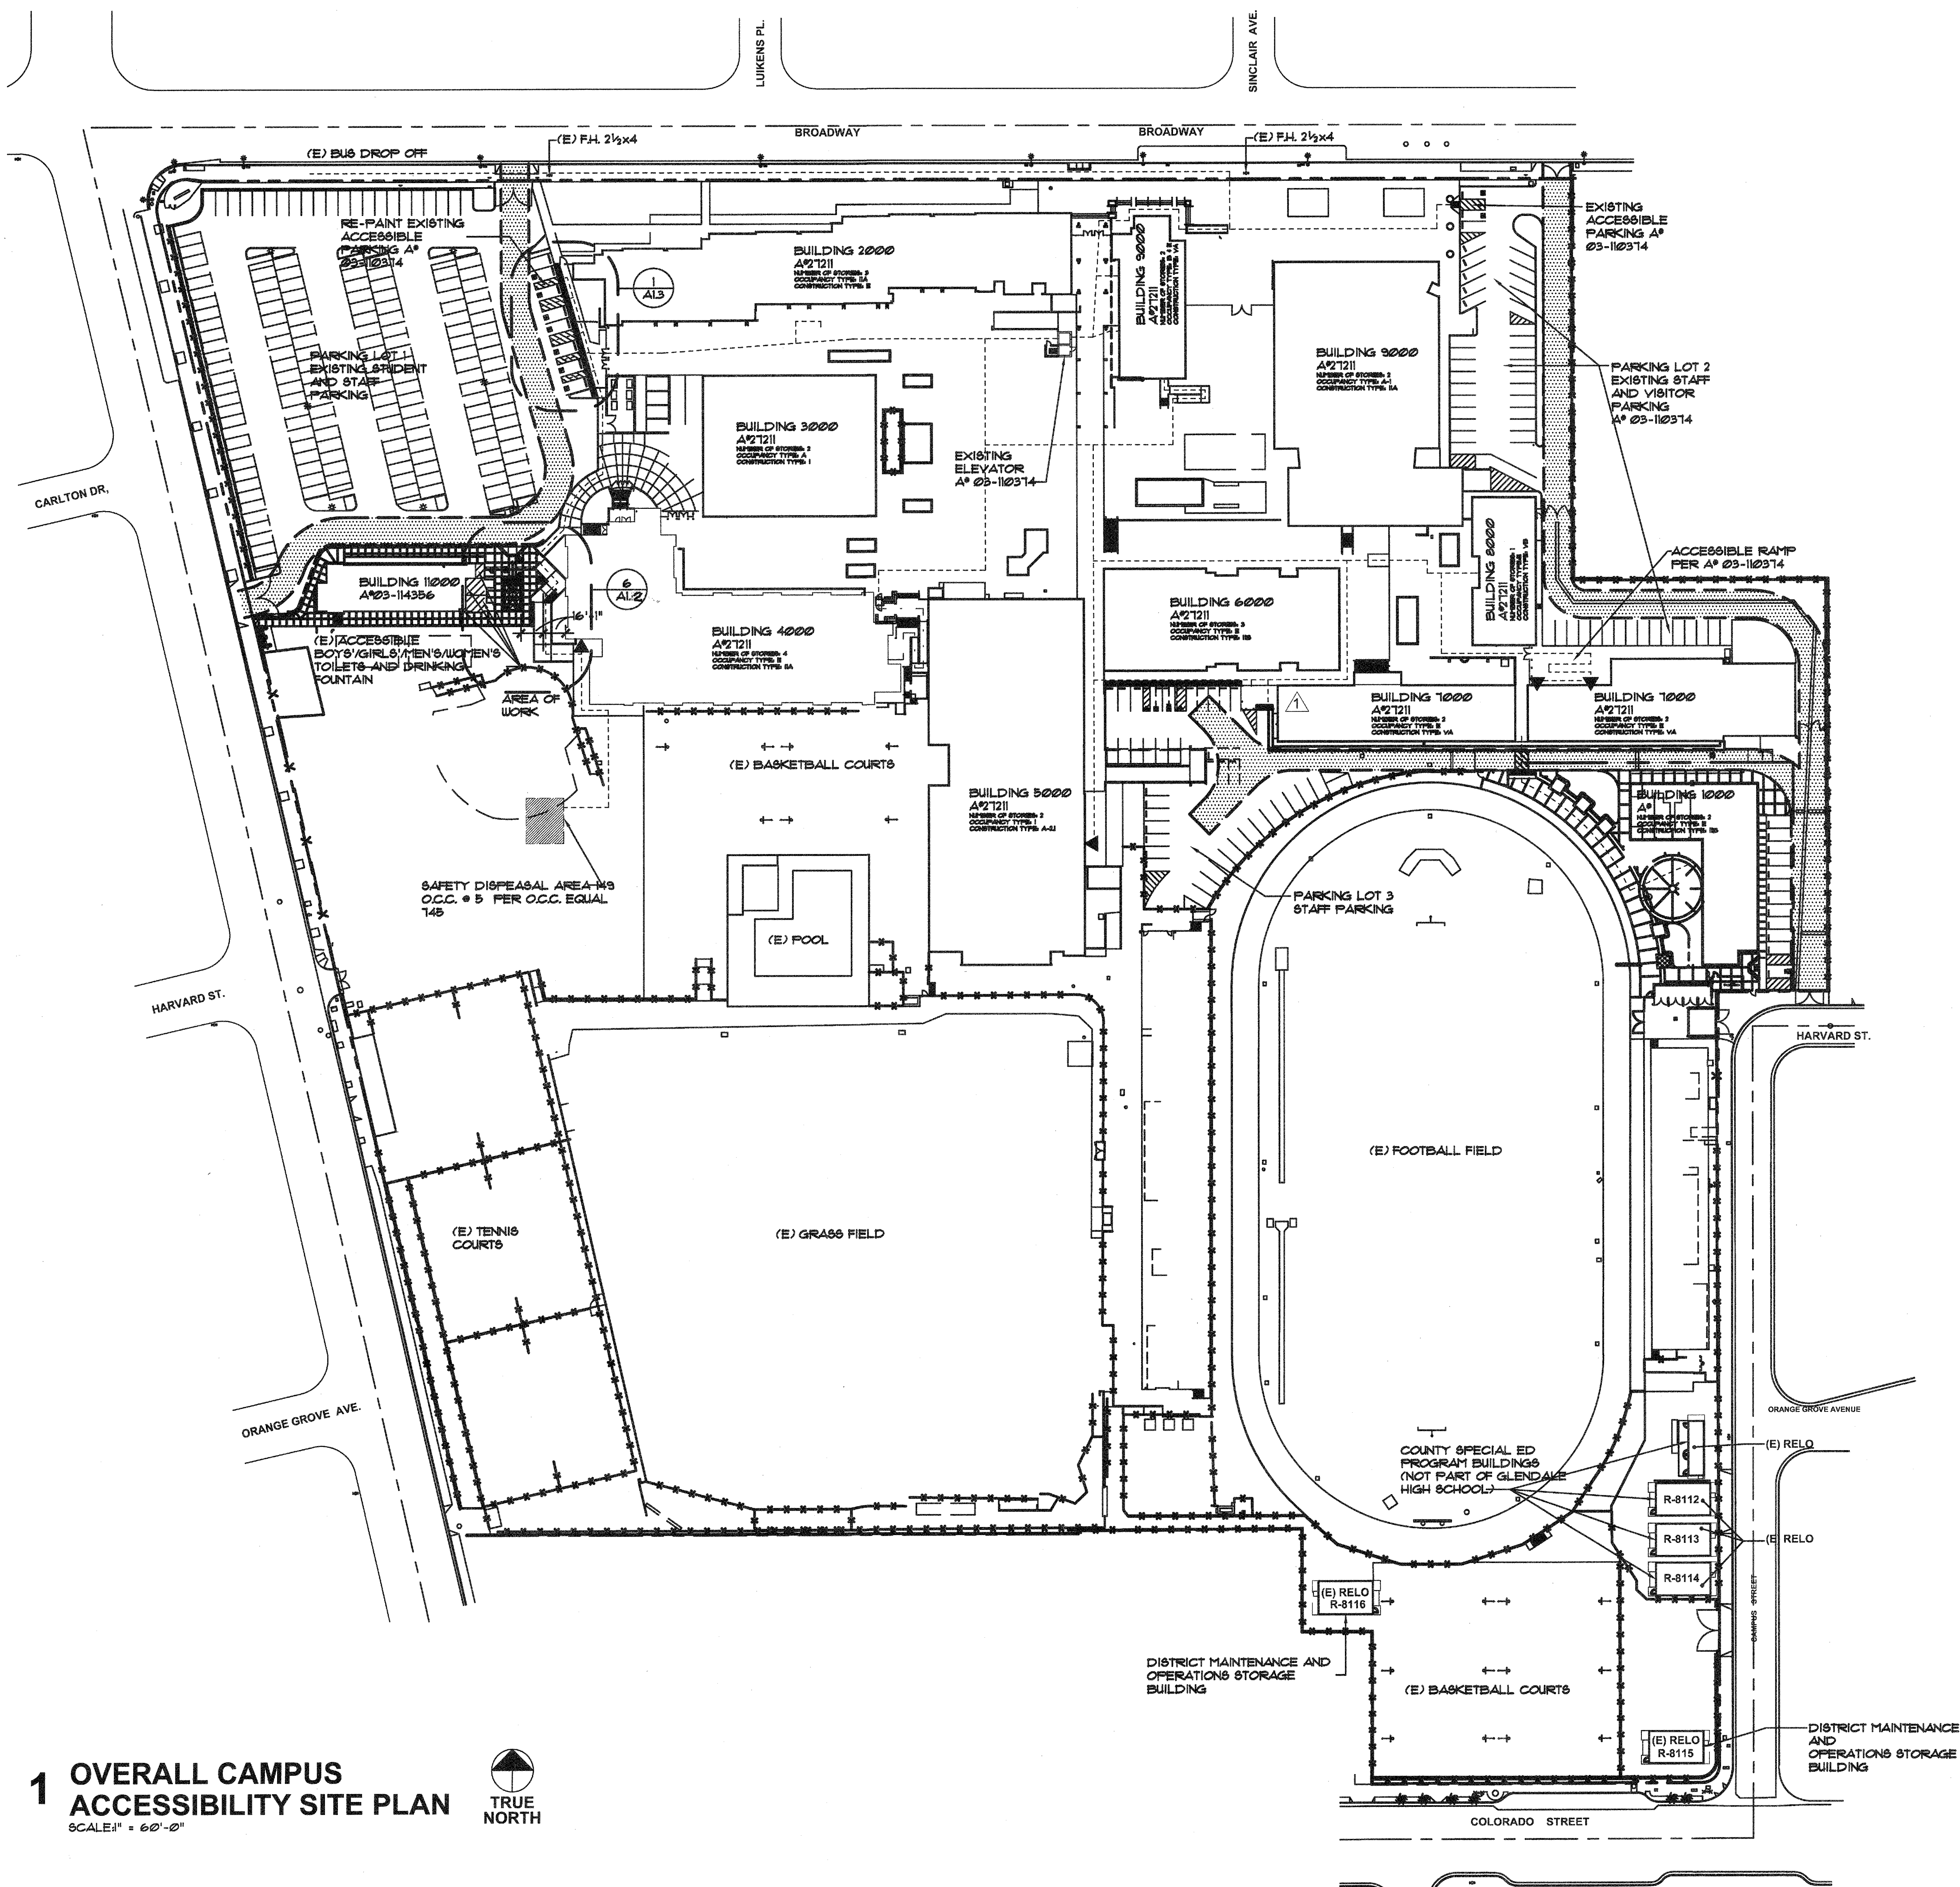

LEGEND

- EXISTING BUILDING
- NEW DISTRICT FURNISHED AND CONTRACTOR INSTALLED PRE-MANUFACTURED METAL SHADE STRUCTURE
- EXISTING ACCESSIBLE STUDENT AND STAFF TOILETS (A203-114356)

PATH OF TRAVEL

THE P.O.T. IDENTIFIED IN THESE CONSTRUCTION DOCUMENTS IS COMPLIANT WITH THE CURRENT APPLICABLE CALIFORNIA BUILDING CODE ACCESSIBILITY PROVISIONS FOR PATH OF TRAVEL REQUIREMENTS FOR ALTERATIONS, ADDITIONS AND STRUCTURAL REPAIRS. AS PART OF THE DESIGN OF THIS PROJECT, THE P.O.T. WAS EXAMINED AND ANY ELEMENTS, COMPONENTS, OR PORTIONS OF THE P.O.T. THAT WERE DETERMINED TO BE NONCOMPLIANT 1) HAVE BEEN IDENTIFIED AND 2) THE CORRECTIVE WORK NECESSARY TO BRING THEM INTO COMPLIANCE HAS BEEN INCLUDED WITHIN THE SCOPE OF THIS PROJECT'S WORK THROUGH DETAILS, DRAWINGS AND SPECIFICATIONS INCORPORATED INTO THESE CONSTRUCTION DOCUMENTS. ANY NONCOMPLIANT ELEMENTS, FINDING OF UNREASONABLE HARDSHIP ARE SO INDICATED IN THESE CONSTRUCTION DOCUMENTS. DURING CONSTRUCTION, IF P.O.T. ITEMS WITHIN THE SCOPE OF THE PROJECT REPRESENTED AS CODE COMPLIANT ARE FOUND TO BE NONCONFORMING BEYOND REASONABLE CONSTRUCTION TOLERANCES, THEY SHALL BE BROUGHT INTO COMPLIANCE WITH THE CBC AS A PART OF THIS PROJECT BY MEANS OF A CONSTRUCTION CHANGE DOCUMENT.

- ACCESSIBLE ENTRANCE
- PROPERTY LINES
- ASSUMED PROPERTY LINES PER CBC SECTION 503

ARCHITECTURE
9 PLLLP

8816 Foothill Boulevard, Suite 103-224
Rancho Cucamonga, CA. 91730
A9contact@architecture9.com

ARCHITECTS STAMP:

CONSULTANT:

CONSULTANTS STAMP:

AUTHORITY APPROVAL:

IDENTIFICATION STAMP
DIV. OF THE STATE ARCHITECT

APPL 03-118 709

AC: [Signature] FLS: [Signature] SS: [Signature] PKL
DATE: JAN 17 2018

SCHOOL DISTRICT:
GLENDALE UNIFIED SCHOOL DISTRICT

PROJECT:
GLENDALE HIGH SCHOOL BUILDING 11,000 SHADE STRUCTURE

JOB NUMBER: 10.04.16
DATE: 10.25.17

REVISION: DATE: _____
REVISION: DATE: _____
REVISION: DATE: _____


DRAWING TITLE:
OVERALL SITE PLAN

DRAWING NO.:

A1.1


1 OVERALL CAMPUS ACCESSIBILITY SITE PLAN
SCALE: 1" = 60'-0"



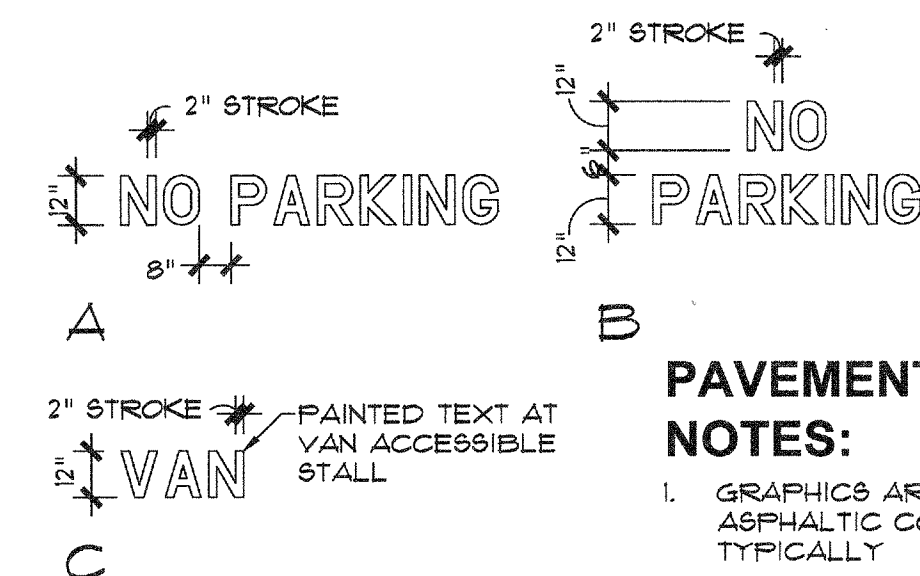


PAVEMENT MARKING NOTES:
 1. GRAPHICS ARE PAINTED WHITE OVER ASPHALTIC CONCRETE SURFACE TYPICALLY


4 NEW TRAFFIC CONTROL PAVEMENT MARKING
 SCALE: 1/4" = 1'-0"

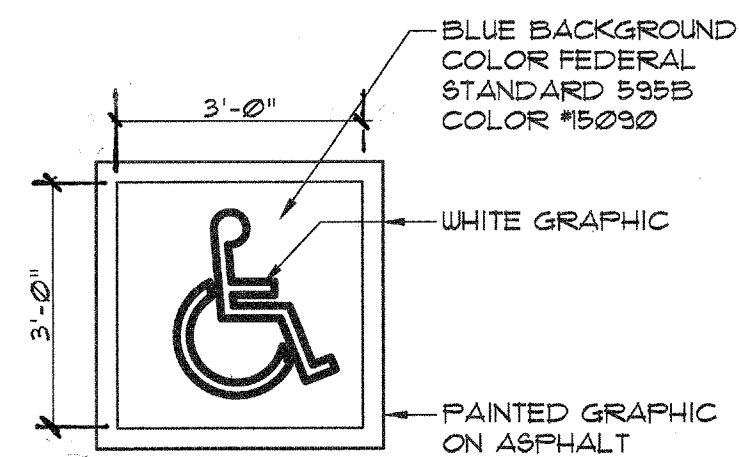


3 ACCESSIBLE PARKING SYMBOL
 SCALE: 1/2" = 1'-0"

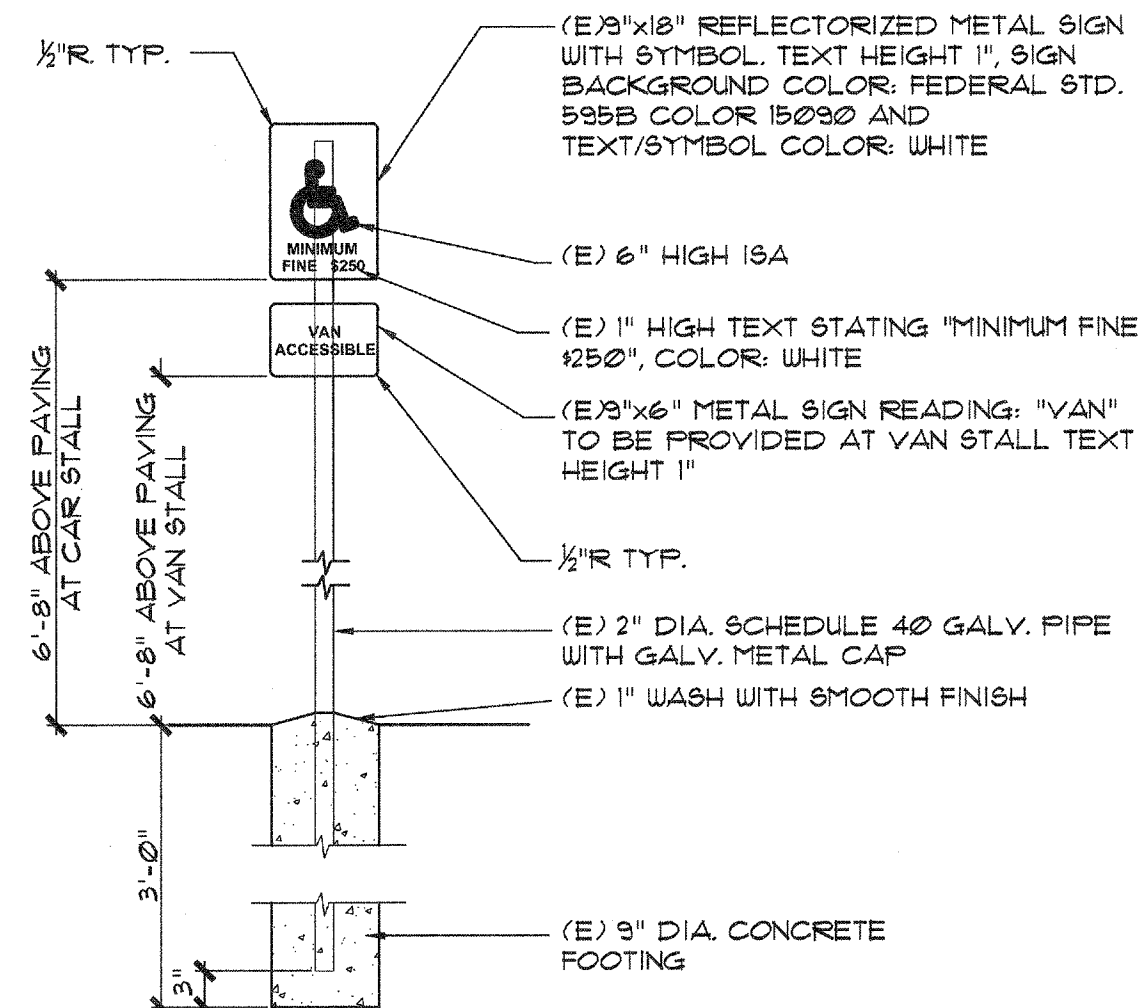

2 ACCESSIBLE PARKING STALL SIGN
 SCALE: 3/4" = 1'-0"

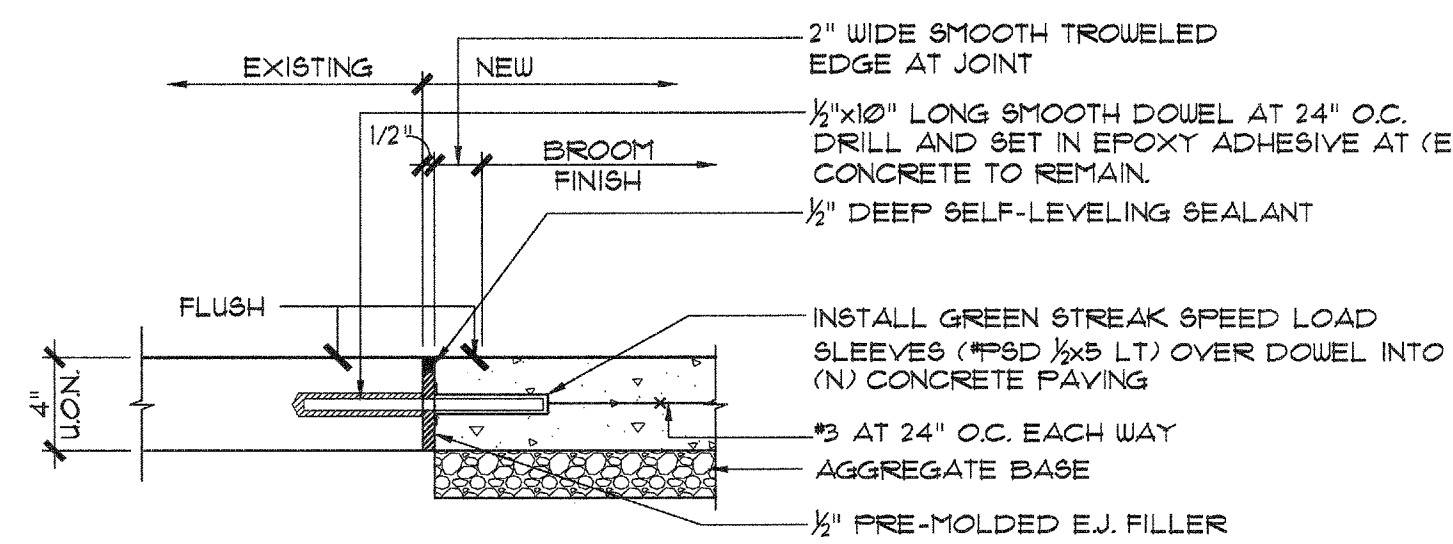

5 CONCRETE PAVING EXISTING/ NEW JOINT
 SCALE: 1-1/2" = 1'-0"

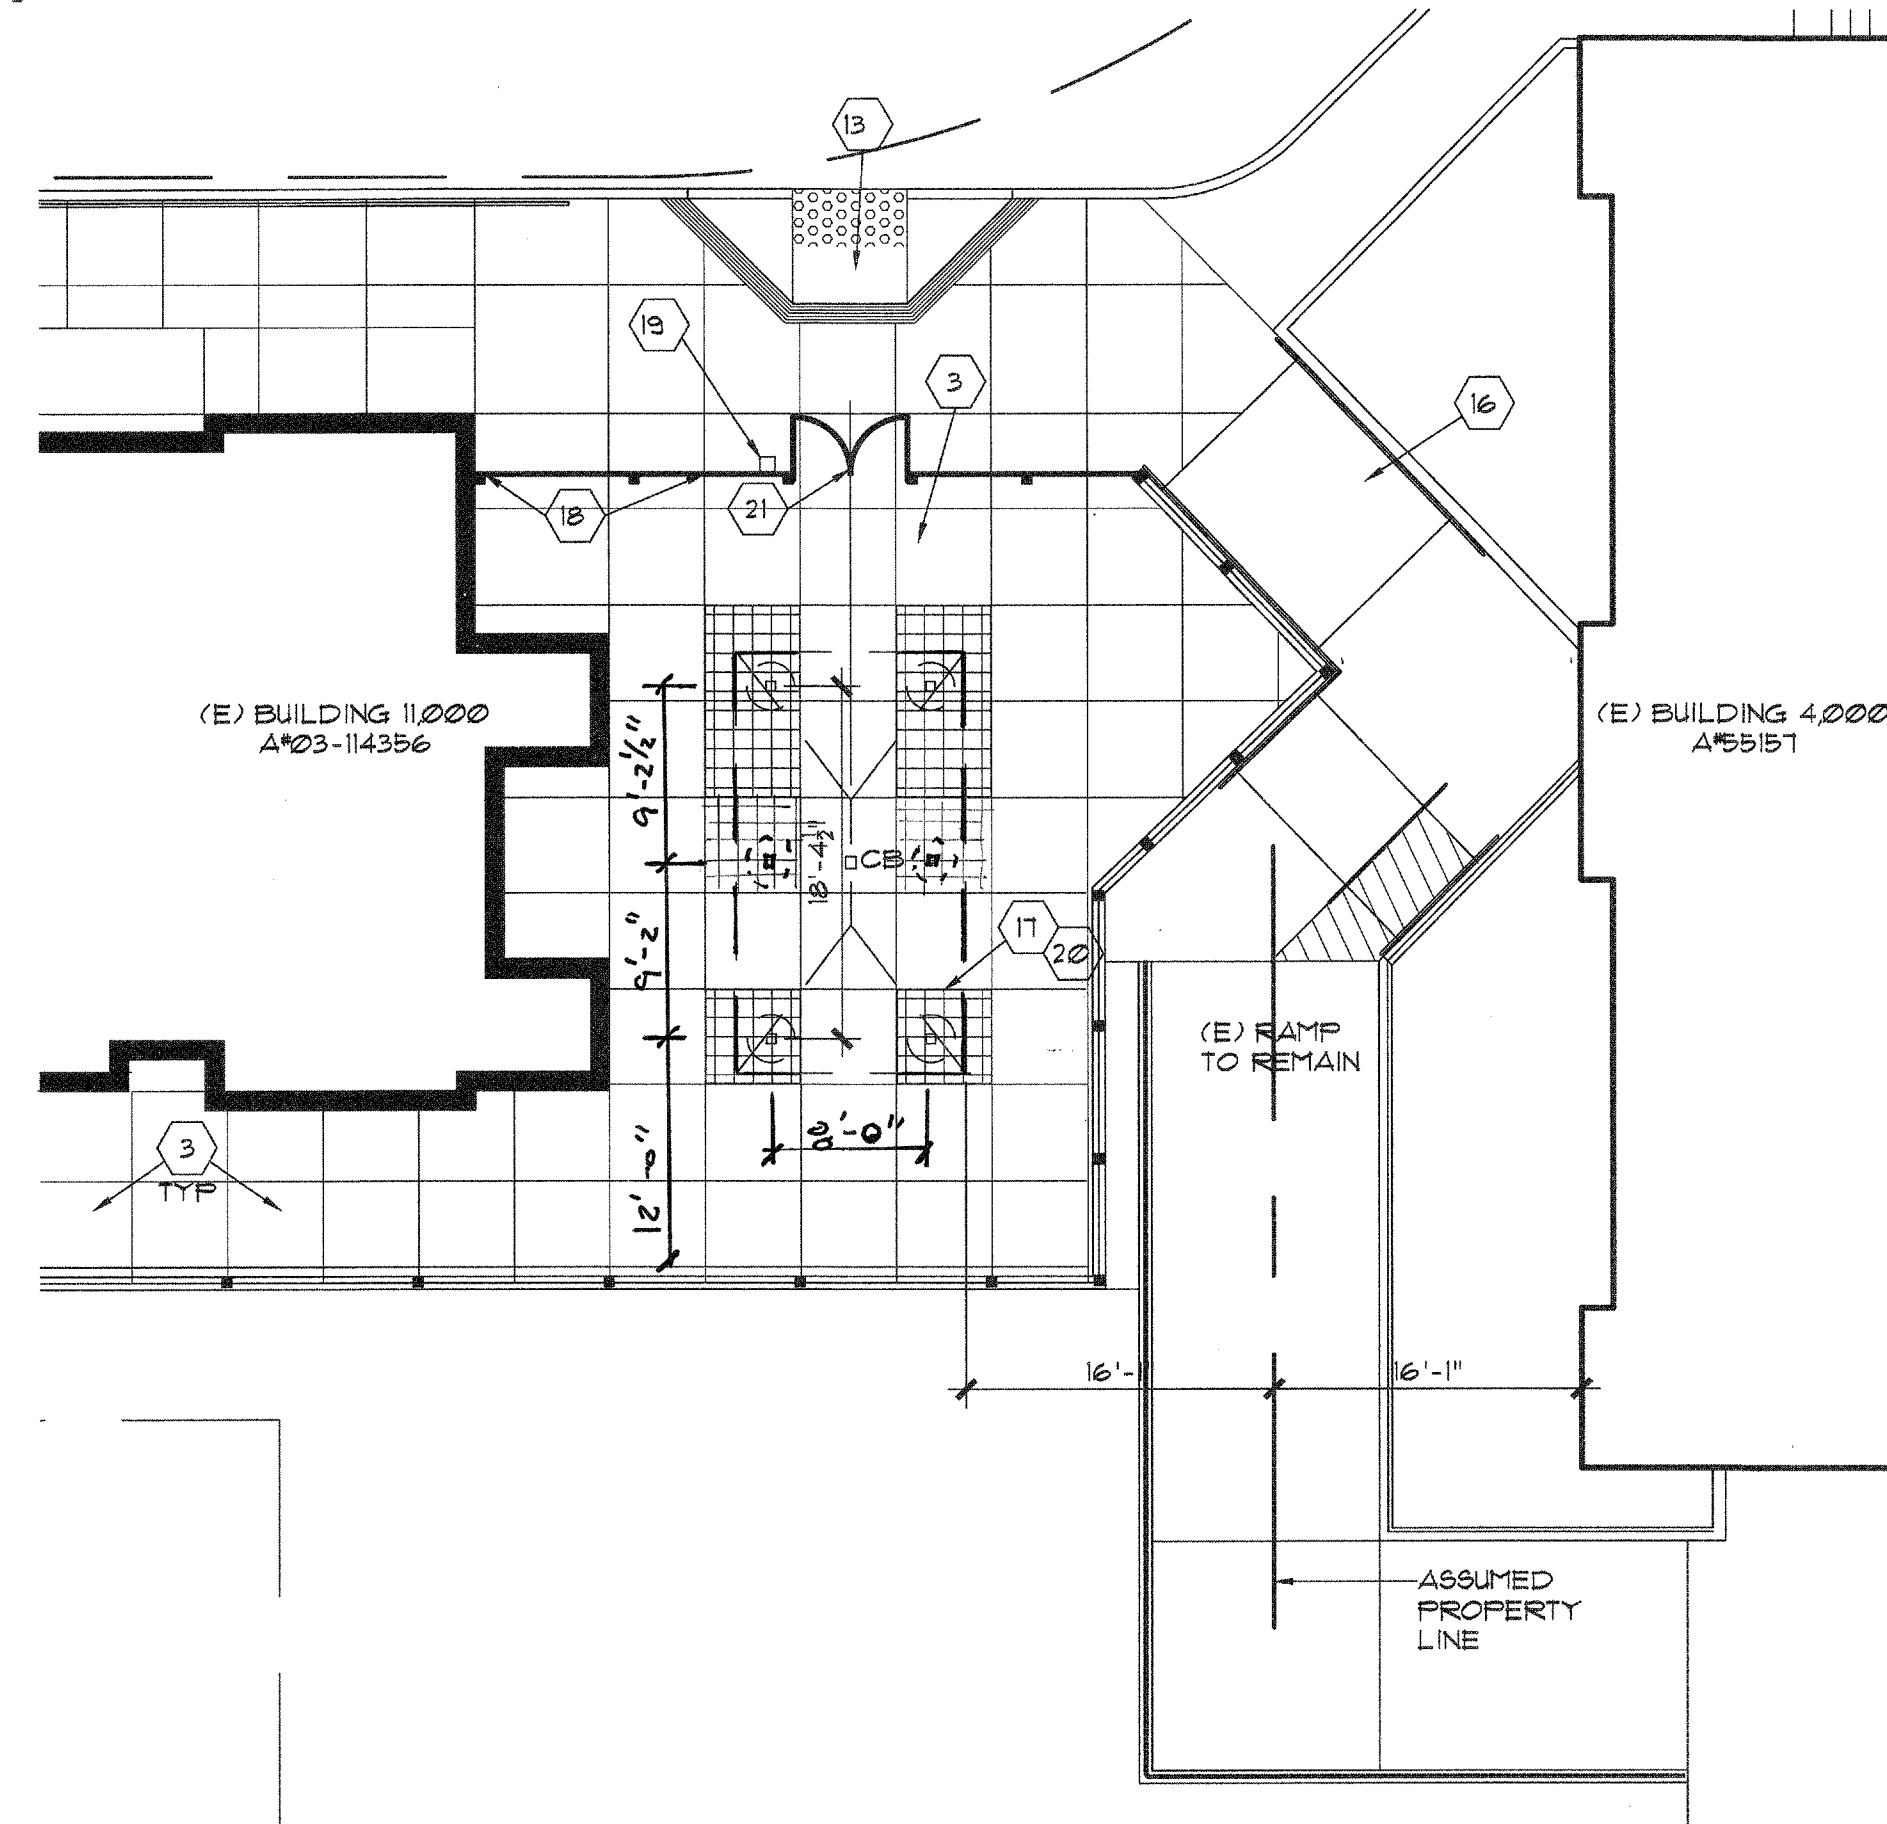

6 ENLARGED SITE PLAN
 SCALE: 1" = 10'-0"

KEYNOTES

- EXISTING 6" W CONCRETE BOARDER FLUSH WITH ADJACENT SURFACES
- EXISTING ASPHALTIC CONCRETE PAVING WITH 2% MAX SLOPE IN ANY DIRECTION. BLACK OUT EXISTING STRIPING AS REQ. FOR NEW DESIGN.
- EXISTING CONCRETE SIDEWALK WITH 2% MAX SLOPE IN ANY DIRECTION
- NEW 4" WIDE PAINTED BOARDER, COLOR: BLUE FEDERAL STANDARD 595B COLOR NO. 15030
- NEW 4" WIDE PAINTED WHITE STRIPE
- NEW 4" WIDE PAINTED WHITE DIAGONAL STRIPES AT 36" O.C.
- EXISTING CONCRETE WHEELSTOP
- NEW PAINTED 18A SYMBOL, RE: 9/A12
- NEW 12" HIGH PAINTED TEXT RE: 4/A12, COLOR: WHITE
- EXISTING ACCESSIBLE PARKING SPACE SIGN RE: 2/A12
- EXISTING ACCESSIBLE PARKING SPACE, VAN ACCESSIBLE SIGN RE: 2/A12
- EXISTING SOLAR PANEL COLUMN (A*15100)
- EXISTING CURB RAMP (A*03-114356)
- EXISTING TRUNCATED DOMES
- NEW 4" WIDE PAINTED BLUE FEDERAL STANDARD 595B COLOR NO. 15030 STRIPE
- EXISTING 8.33% RAMP
- REMOVE EXISTING 4" CONCRETE PAVING
- EXISTING 8'-0" H. DECORATIVE METAL FENCE
- NEW KNOX BOX
- NEW 4" CONCRETE PAVING, RE: 5/A12
- EXISTING PAIR 4'-0" W X 8'-0" H. DECORATIVE METAL GATES WITH PANIC HARDWARE (A*03-114356)

LEGEND

- EXISTING BUILDING
- NEW DISTRICT FURNISHED AND CONTRACTOR INSTALLED 12'X22' PRE-MANUFACTURED METAL SHADE STRUCTURE
- NEW 4" CONCRETE PAVING
- PROPERTY LINES
- ASSUMED IMAGINARY LINE PER CBC SECTION 105.3

PARKING TABULATION

PARKING LOT 1	
TOTAL PARKING SPACES	130
ACCESSIBLE PARKING SPACES REQ'D PER TABLE 11B-6	6
REGULAR ACCESSIBLE SPACES PROVIDED	5
VAN ACCESSIBLE SPACES PROVIDED	2
STANDARD SPACES PROVIDED	111

Architecture
 PLLLP
9
 8816 Foothill Boulevard, Suite 103-224
 Rancho Cucamonga, CA. 91730
 A9contact@architecture9.com

ARCHITECTS STAMP:

CONSULTANT:

CONSULTANTS STAMP:

AUTHORITY APPROVAL:
 IDENTIFICATION STAMP
 DIV. OF THE STATE ARCHITECT
 APPL03-118709
 ADW FLS. 05 SS PM
 DATE: JAN 17 2018

SCHOOL DISTRICT:
GLENDALE UNIFIED SCHOOL DISTRICT

PROJECT:
GLENDALE HIGH SCHOOL BUILDING 11,000 SHADE STRUCTURE


JOB NUMBER: 10.04.16
 DATE: 10.25.17

REVISION: DATE: _____
 REVISION: DATE: _____

DRAWING TITLE:
ENLARGED SITE PLAN

DRAWING NO.:

A1.2

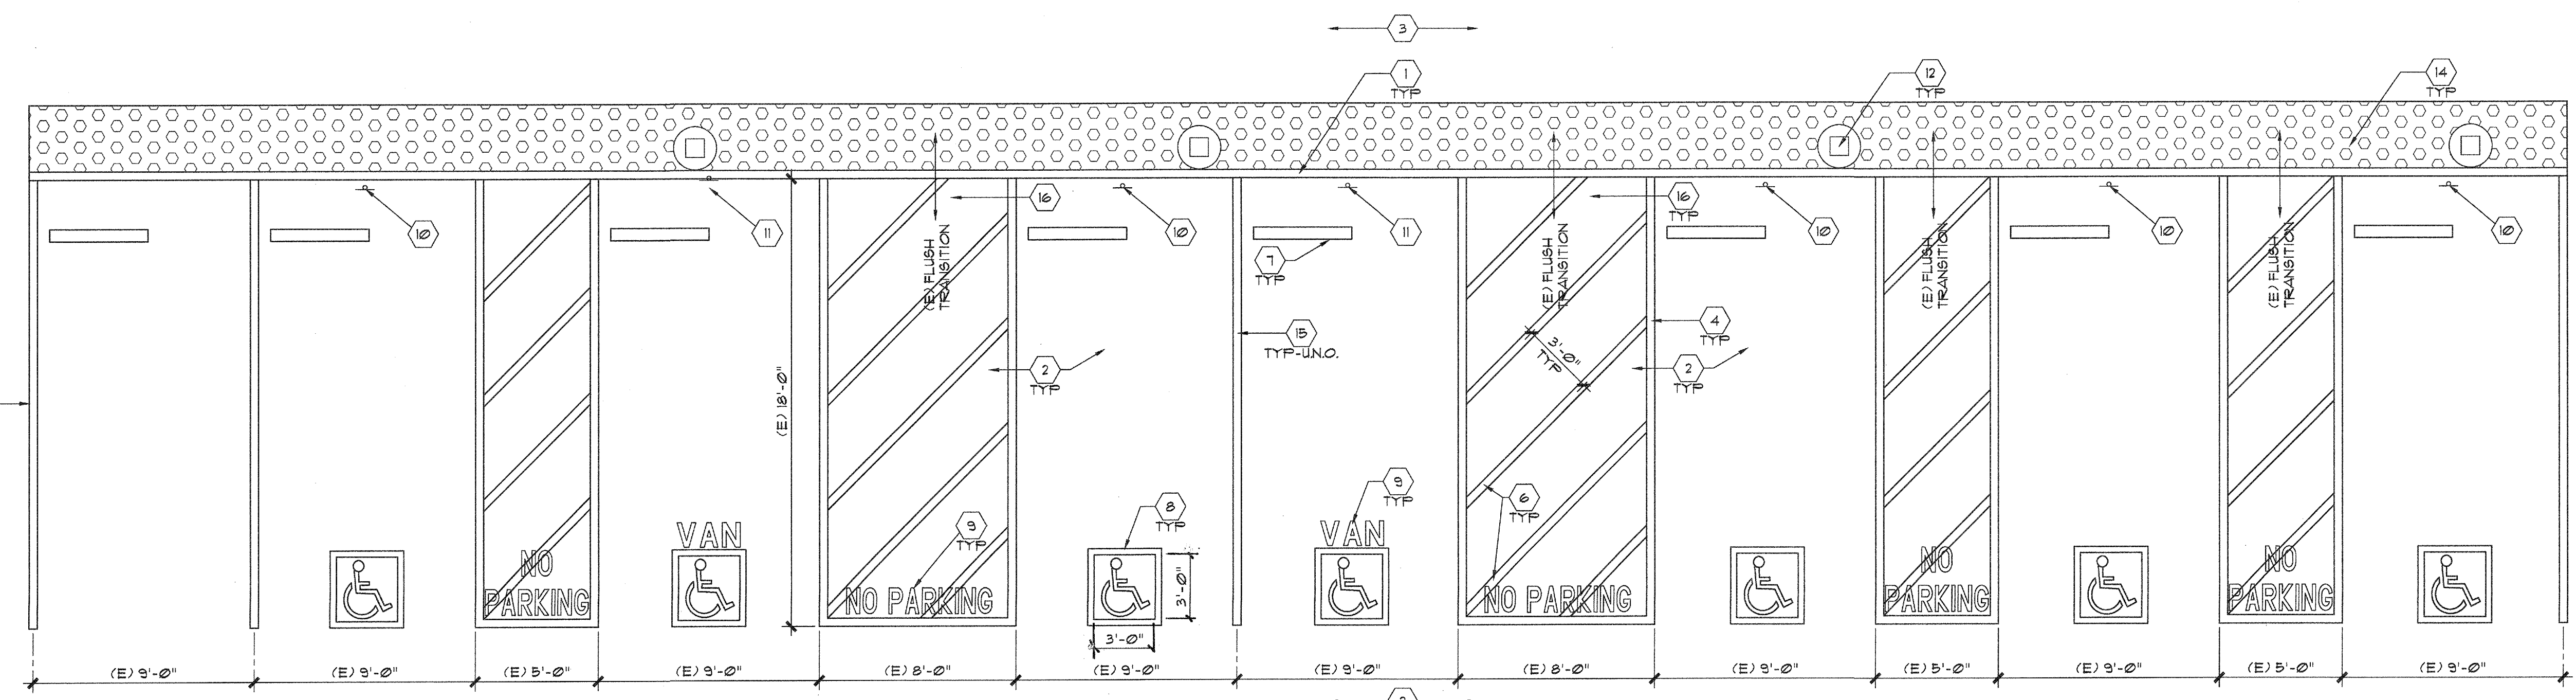

1 EXISTING ACCESSIBLE PARKING
 SCALE: 1/4" = 1'-0"

DESIGN VALUES:

Table with columns DESCRIPTION and DESIGN VALUES. Sections include DEAD AND LIVE LOADS, ALLOWABLE SOIL PRESSURE, ROOF SNOW LOAD, FLOOD DESIGN, WIND DESIGN, SEISMIC DESIGN, ARCHITECTURAL REQUIREMENTS, and RELATED BUILDING CODES AND STANDARDS.

GENERAL:

- 1. GENERAL NOTES AND TYPICAL DETAILS SHALL APPLY TO ALL PARTS OF THE JOB EXCEPT WHERE THEY MAY CONFLICT WITH DETAILS AND NOTES ON OTHER SHEETS.
2. WORK SHALL CONFORM TO THE REQUIREMENTS, AS AMENDED TO DATE, OF THE LATEST ADOPTED EDITION OF THE CBC, C.A.C. TITLE 24, AND ALL OTHER LOCAL, STATE AND FEDERAL REGULATIONS.
3. OMISSIONS OR CONFLICTS BETWEEN THE VARIOUS ELEMENTS OF THE WORKING DRAWINGS AND/OR SPECIFICATIONS SHALL BE BROUGHT TO THE ATTENTION OF THE STRUCTURAL ENGINEER FOR THIS PROJECT PRIOR TO PROCEEDING WITH ANY WORK INVOLVED.

STRUCTURAL AND MISCELLANEOUS STEEL:

- 1. ALL STRUCTURAL STEEL SHALL BE DETAILED, FABRICATED AND ERECTED IN ACCORDANCE WITH THE AMERICAN INSTITUTE OF STEEL CONSTRUCTION (AISC) SPECIFICATION MANUAL REFERENCED BY THE LATEST EDITION OF THE CALIFORNIA BUILDING CODE.
2. PIPE SECTIONS SHALL CONFORM TO ASTM A53, Fy = 35 ksi, GRADE B OR A501 UNLESS NOTED OTHERWISE.
3. STRUCTURAL TUBING (HSS SHAPES) SHALL CONFORM TO ASTM A500, GRADE B (OR HIGHER), Fy = 46 KSI.

WELDING:

- 1. ALL WELDING SHALL COMPLY WITH AWS D1.1 SPECIFICATIONS AND SHALL BE DONE BY AWS QUALIFIED WELDERS CERTIFIED FOR THE TYPE OF WELDING TO BE PERFORMED AS REQUIRED BY DSA.
2. ALL WELDING SHALL BE DONE BY GAS METAL ARC PROCESS WITH E70XX ELECTRODES. FLUX CORE ARC WELD SHALL CONFORM TO CHARPY NOTCH TOUGHNESS RATINGS OF 20 FT-LB @ (0°F).

BOLTING:

- 1. ALL BOLTS SHOWN ON THESE DRAWINGS ARE ASTM A325 HIGH STRENGTH BOLTS (UNO), TYPE 3.
2. HIGH STRENGTH BOLTS SHALL BE SAMPLED AND TESTED IN COMPLIANCE WITH CBC 2213A.1.
3. BEFORE ERECTING THE FRAME, VERIFY ALL BOLTS AND NUTS ARE CLEAN OF DEBRIS AND BURRS - INCLUDING THE HARDWARE ALREADY FASTENED INTO THE MEMBERS. CHASING SOME OF THE BOLTS AND NUTS MAY BE REQUIRED.

FOUNDATIONS:

- 3. ALLOWABLE SOIL PRESSURES ASSUME CLASS 4 SOIL CLASSIFICATION PER CBC TABLE 1806A.
2. A GEOTECHNICAL REPORT / LETTER IS REQUIRED AT THE OVER-THE-COUNTER APPOINTMENT FOR EACH PROJECT.
3. FILL AND BACKFILL SHALL BE COMPACTED TO 95% OF MAX. DENSITY IN ACCORDANCE WITH ASTM TEST METHOD D1557-70. FLOODING NOT PERMITTED.

CONCRETE:

- 1. MIX DESIGN REQUIREMENTS: (NORMAL WEIGHT CONCRETE)
2. CHANGES TO THE MIX DESIGN MUST BE APPROVED BY THE ENGINEER OR ARCHITECT OF RECORD AND DSA
3. AGGREGATES SHALL CONFORM TO ASTM C33 WITH PROVEN SHRINKAGE CHARACTERISTICS OF LESS THAN .005. MAX AGGREGATE SIZE = 1".

Tables for FOUNDATION REQUIREMENTS and STEP 6: IDENTIFY THE FOUNDATION REQUIREMENTS FOR YOUR PROJECT. Includes columns for Ss REGION, DEAD LOAD (DL), LOAD SCENARIO, SPREAD PAD, and DRILLED PIER.

REINFORCING STEEL:

- 1. REINFORCING STEEL SHALL BE DEFORMED STEEL CONFORMING TO THE REQUIREMENTS OF ASTM A615. (DEFORMATIONS SHALL BE IN ACCORDANCE WITH ASTM A305) AS FOLLOWS:
2. DETAILING, FABRICATION, AND ERECTION OF REINFORCING BARS SHALL CONFORM THE ACI "MANUAL OF STANDARD PRACTICE FOR DETAILING REINFORCING CONCRETE STRUCTURES."
3. MIN. COVER FOR CAST-IN-PLACE CONCRETE SHALL BE AS FOLLOWS:

POWDER COATED AND EPOXY PRIMED FINISH:

- 1. ENTIRE POWDER COATING PROCESS COMPLETED IN SAME FACILITY AS STEEL FABRICATION.
2. ALL CARBON STEEL MEMBERS (COLUMNS, BEAMS, PLATES, ETC.) PAINTED WITH PRIME COAT PER THE "AISC CODE OF STANDARD PRACTICE" AND THE "AISC SPECIFICATION SECTION M3" (UNLESS NOTED OTHERWISE).
3. PARTS PRETREATED IN A 3 STAGE IRON PHOSPHATE WASHER (OR EQUAL).

ABBREVIATIONS:

Table of abbreviations including ACI, AISC, ASM, ASTM, AWS, CBC, CJP, CLR, DEG, DIA, DIM, DSA, EQ, FT, GA, IN, KSI, LH, MAX, MIN, MISC, MPH and their corresponding full names.

INSTRUCTIONS FOR ARCHITECTS SUBMITTING THESE PRE-CHECKED DRAWINGS TO DSA:



BEFORE SUBMITTING THESE PRE-CHECKED DRAWINGS FOR YOUR PROJECT, FOLLOW THE STEPS BELOW TO PROPERLY DEFINE THE APPROVED OPTIONS: THE POLYGON ENGINEERING DEPARTMENT IS AVAILABLE TO HELP YOU COMPLETE THESE STEPS (616-399-1943).

- STEP 1: SELECT FRAME DIMENSIONS FOR YOUR PROJECT
STEP 2: SELECT ROOF DECK FOR YOUR PROJECT
STEP 3: IDENTIFY THE Ss ACCELERATION (g) FOR YOUR PROJECT
STEP 4: IDENTIFY THE Ss REGION FOR YOUR PROJECT
STEP 5: IDENTIFY THE ROOF DEAD LOAD FOR YOUR PROJECT

- STEP 6: IDENTIFY THE FOUNDATION REQUIREMENTS FOR YOUR PROJECT
- REFERENCE THE Ss REGION (STEP 4) AND THE TOTAL ROOF DEAD (STEP 5)
- IDENTIFY A SINGLE LOAD SCENARIO

- STEP 7: SELECT MISCELLANEOUS OPTIONS FOR YOUR PROJECT
STEP 8: SELECT APPLICABLE SHEET INDEX FOR YOUR PROJECT
STEP 9: INCLUDE APPLICABLE SHEETS WITH YOUR DSA SUBMITTAL
STEP 10: IDENTIFY PROJECT NAME AND SCHOOL DISTRICT

SHEET INDEX table showing BASE FRAME, ROOF DECK, SELECT ONE, GENERAL NOTES, SPECIAL INSPECTIONS, FOUNDATION PLAN, FRAMING PLAN, FRAME CONNECTION DETAILS, SECTION DETAILS, PLATE DETAILS, ARCHITECTURAL VIEWS, ROOF CONNECTION DETAILS, and MISC DESIGN OPTIONS.

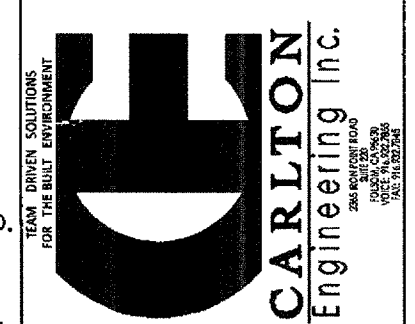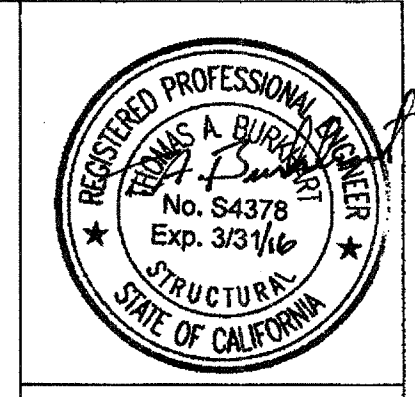

STATE APPROVALS
File No. PC-1
POLYGON ENGINEERING INC.
11591
DATE: 12/17/2015
Rev. 1

PRE-CHECK (PC) DOCUMENT
CODE: 2013 CBC
A SEPARATE PROJECT APPLICATION FOR CONSTRUCTION IS REQUIRED.

GENERAL NOTES
HIP ROOF (RAM)
PC DRAWINGS
DRAWN BY: JMD
CHECKED BY: CE
POLYGON #: 51458

GENERAL NOTES
HIP ROOF (RAM)
PC DRAWINGS

IDENTIFICATION STAMP
DIV. OF THE STATE ARCHITECT
03 118709
JAN 17 2015

SPECIAL INSPECTION NOTES:

1. THE PROJECT INSPECTOR AND TESTING AGENCY SHALL BE SELECTED BY THE SCHOOL DISTRICT AND APPROVED BY DSA AND THE ARCHITECT OF RECORD.
2. COSTS OF THE PROJECT INSPECTOR AND THE TESTING AGENCY SHALL BE BORN BY THE SCHOOL DISTRICT.
3. THE PROJECT INSPECTOR, AND ENTIRE CONSTRUCTION OVERSIGHT PROCESS, SHALL COMPLY WITH DSA PR 13-01.
4. ON APPROVED PC DRAWINGS, THE STATEMENT OF STRUCTURAL TESTS AND SPECIAL INSPECTIONS (FORM DSA-103) BELOW IS ONLY AN EXAMPLE. ON APPROVED PC DRAWINGS, THE EXAMPLE FORM DSA-103 MUST BE CROSSED OUT BEFORE THE PC DRAWINGS CAN BE APPROVED AS PART OF A SITE-SPECIFIC (OR STOCKPILE) PROJECT SO THEY WILL NOT CONFLICT WITH THE OFFICIAL FORM DSA-103 FOR THE PROJECT.

DSA DIVISION OF THE STATE ARCHITECT DEPARTMENT OF GENERAL SERVICES
DSA-103 rev 12/20/13
Statement of Structural Tests & Special Inspections - 2013 CBC

INCREMENT # _____ DSA File No.: **PC-1**
 Application No.: **02-113591**
 Date Submitted: _____ Revisited: _____

School Name: **EXAMPLE - REMOVE ON SITE-SPECIFIC PROJECTS** District: **EXAMPLE - REMOVE ON SITE-SPECIFIC PROJECTS**

IMPORTANT: This form is only a summary list of structural tests and special inspections required for the project. The actual tests and inspections must be performed as detailed on the DSA approved documents. The project inspector is responsible for providing inspection of all facets of construction, including but not limited to, special inspections not listed on this form such as structural wood framing, high-load wood diaphragms, cold-formed steel framing, anchorage of non-structural components, etc., per Title 24, Part 2, Chapter 17A.
NOTE: This form is also available for projects submitted for review under the 2007 and 2010 CBC.

INSTRUCTIONS: Click a plus sign (+) before any category or subcategory to reveal additional tests and special inspections. An "X" before a listed test or inspection indicates it is a mandatory requirement. A shaded box indicates a test or special inspection that may be required, depending on the scope of the construction and other issues. A shaded box can be clicked indicating your selection of that test. **Note:** A minus (-) on a category or subcategory heading indicates that it can be collapsed. However, any selections you have made will be cleared. Click on the "COMPLETE" button to show only the tests finally selected. For more information on use of this form, see DSA-103.INSTR.

Note: References are to the 2013 edition of the California Building Code (CBC) unless otherwise noted.

REQUIRED	TEST OR SPECIAL INSPECTION	TYPE	PERFORMED BY*	CODE REFERENCE AND NOTES
-	SOILS			
	1. GENERAL: Table 1705A.6			
X	a. Verify that: • site has been prepared properly prior to placement of controlled fill and/or excavations for foundations, • foundation excavations are extended to proper depth and have reached proper material, and • materials below footings are adequate to achieve the design bearing capacity.	Periodic	GE*	* By geotechnical engineer or his or her qualified representative.
-	4. CAST-IN-PLACE DEEP FOUNDATIONS (PIERS): Table 1705A.7			
X	a. Inspect drilling operations and maintain complete and accurate records for each pier.	Continuous	GE*	* By geotechnical engineer or his or her qualified representative.
X	b. Verify locations of piers.	Continuous	PI	
X	c. Confirm pier diameters, plumbness, bell diameters (if applicable), lengths, and embedment into bedrock (if applicable). Record concrete or grout volumes.	Continuous	GE*	* By geotechnical engineer or his or her qualified representative.
X	e. Concrete piers.			Provide tests and inspections per CONCRETE section below.
-	CONCRETE Table 1705A.3			
	7. CAST IN PLACE CONCRETE			
	Material Verification and Testing:			
X	a. Verify use of required design mix.	Periodic	SI & PI*	* To be performed by batch-plant special inspector and project inspector.
X	b. Test reinforcing steel.	Test	Lab	1915A.2 (1813.2.6)*, ASTM A370, DSA IR 17-10
X	c. Perform slump, temperature, and (where required) air content tests.	Test	Lab	ASTM C172, ASTM C31
X	d. Test concrete (compression).	Test	Lab	ACI 318 Section 5.6 and 1905A.1.2 (1913.3.1)*, ASTM C39
X	e. Inspect placement of formwork, reinforcing steel, embedded items and concrete. Inspect curing and form removal.	Continuous	PI*	* May be performed by a special inspector when specifically approved by DSA.
+	MASONRY TMS 402-12/ACI 530-11/ASCE 5-11 Table 1.18.3			
-	STEEL Table 1705A.2.1			
	17. STRUCTURAL STEEL AND COLD-FORMED STEEL USED FOR STRUCTURAL PURPOSES			
	Material Verification:			
X	a. Verify that all materials are appropriately marked and that: • Mill certificates indicate material properties that comply with requirements, • Material sizes, types and grades comply with requirements.	Periodic	-	* By special inspector when performed off-site; by project inspector for steel shipped directly to project site without welding or fabrication.
X	b. Test unidentified materials.	Test	Lab	2203A.1 (2203.1)*, ASTM A370
X	c. Examine seam welds of structural tubes and pipes.	Periodic	SI*	* DSA IR 17-3.
	Inspection:			
X	d. Verify member locations, bracing and all details constructed in the field.	Continuous	PI	
X	e. Verify stiffener locations, connection job locations and all construction details fabricated in the shop.	Periodic	SI	
-	18. HIGH STRENGTH BOLTS:			
	Material Verification of High-Strength Bolts, Nuts, and Washers:			
X	a. Verify identification markings and manufacturer's certificates of compliance conform to ASTM standards specified in the DSA approved documents.	Periodic	SI	DSA IR 17-9
X	b. Test high-strength bolts, nuts and washers.	Test	Lab	2213A.1 (2212.6.1)*, ASTM F606, A370, DSA IR 17-8
	Inspection of High-Strength Bolt Installation:			
X	d. Slip-critical connections.	-	SI	* "Continuous" or "Periodic" depends on the tightening method used, DSA IR 17-9 and 1705A.2.1, DSA IR 17-3, AWS D1.1 and AWS D1.8 (AWS D1.3 for cold formed steel).
-	19. WELDING:			
	Verification of Materials, Equipment, Welders, etc:			
X	a. Verify weld filler material identification markings per AWS designation listed on the DSA approved documents and the WPS.	Periodic	SI	
X	b. Verify weld filler material manufacturer's certificate of compliance.	Periodic	SI	
X	c. Verify WPS, welder qualifications and equipment.	Periodic	SI	DSA IR 17-3.
-	19.1 SHOP WELDING:			
X	a. Inspect groove, multi-pass, and fillet welds > 5/16"	Continuous	SI	Per AISC 360 (and AISC 341 as applicable), DSA IR 17-3.
X	b. Inspect single-pass fillet welds ≤ 5/16"	Periodic	SI	Per AISC 360 (and AISC 341 as applicable), DSA IR 17-3.
+	WOOD			
+	OTHER			

- 1 Soils testing and inspection: Geotechnical Verified Report - Form DSA-293
- 2 All Structural Testing: Laboratory Verified Report - Form DSA-291
- 3 Concrete Batch Plant Inspection: Special Inspection Verified Report - Form DSA-292
- 4 Shop Welding Inspection: Special Inspection Verified Report - Form DSA-292
- 5 HS Bolt Installation Inspection: Special Inspection Verified Report - Form DSA-292





KEY to Columns

1	Type -	2	Performed By -
Continuous	- Indicates that a continuous special inspection is required	GE	- Indicates that the special inspection is to be performed by a registered geotechnical engineer or his or her authorized representative
Periodic	- Indicates that a periodic special inspection is required	Lab	- Indicates that the test or inspection is to be performed by a testing laboratory accepted in the DSA Laboratory Evaluation and Acceptance (LEA) Program. See section 4-335, 2013 CBC Title 24, Part 1.
Test	- Indicates that a test is required	PI	- Indicates that the special inspection is to be performed by the project inspector
		SI	- Indicates that the special inspection is to be performed by a special inspector

Name of Architect or Engineer in general responsible charge
THOMAS A. BURKHART
 Name of Structural Engineer (When structural design has been delegated)
T.A. Burkhardt 2/28/14
 Signature of Architect or Structural Engineer date

IDENTIFICATION STAMP
 DIV OF THE STATE ARCHITECT
 APP. # 02-113591
 AC N/A F/LS N/A SS
 DATE

IDENTIFICATION STAMP
 DIV OF THE STATE ARCHITECT
 03 118709
 AC N/A F/LS SS PCC
 Date JAN 17 2018

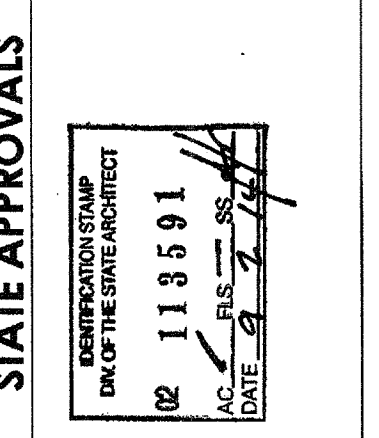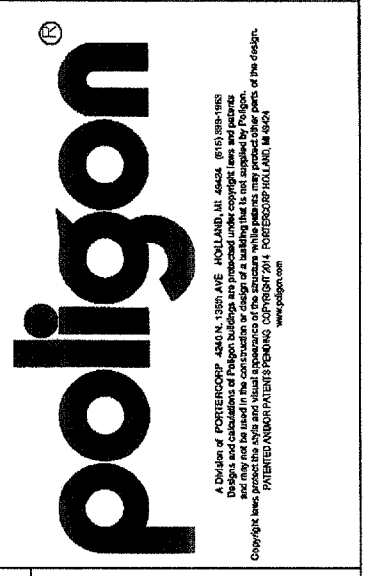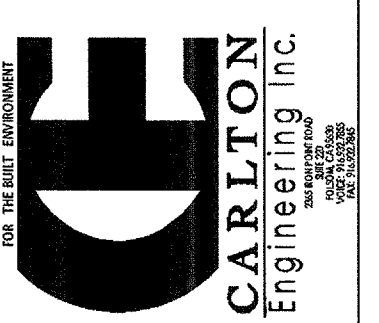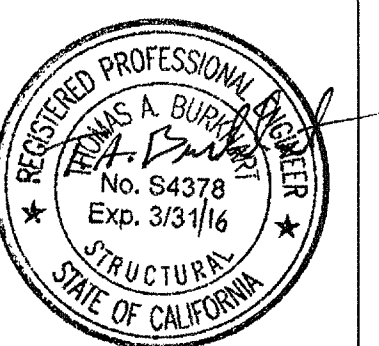

PRE-CHECK (PC) DOCUMENT
 CODE: 2013 CBC
 A SEPARATE PROJECT APPLICATION FOR CONSTRUCTION IS REQUIRED.





SPECIAL INSPECTIONS
 HIP ROOF (RAM)
 PC DRAWINGS

PD1.1


DRAWN BY: JMD
 CHECKED BY: CE
 POLYGON #: 5168

FOUNDATION PLAN NOTES:

- TOP OF ALL FOUNDATIONS MUST BE CONSTRUCTED AT ONE COMMON ELEVATION (COORDINATE WITH SITE PLANS - NOT BY POLYGON)
- ALL FOUNDATIONS MUST BE CENTERED UNDER COLUMNS (UNO).
- SEE SHEET PD1.0 FOR CONCRETE REQUIREMENTS.
- PRIOR TO FORMING AND CASTING FOUNDATIONS, REVIEW FOUNDATION PLAN FOR REQUIRED ORIENTATION.
- FOUNDATION MATERIAL AND INSTALLATION NOT BY POLYGON.
- VIBRATE CONCRETE FULL DEPTH OF FOUNDATION.
- FOR DRILLED PIER FOUNDATIONS, PREVENT SOIL FROM ENTERING EXCAVATED HOLE (FORM, ETC).

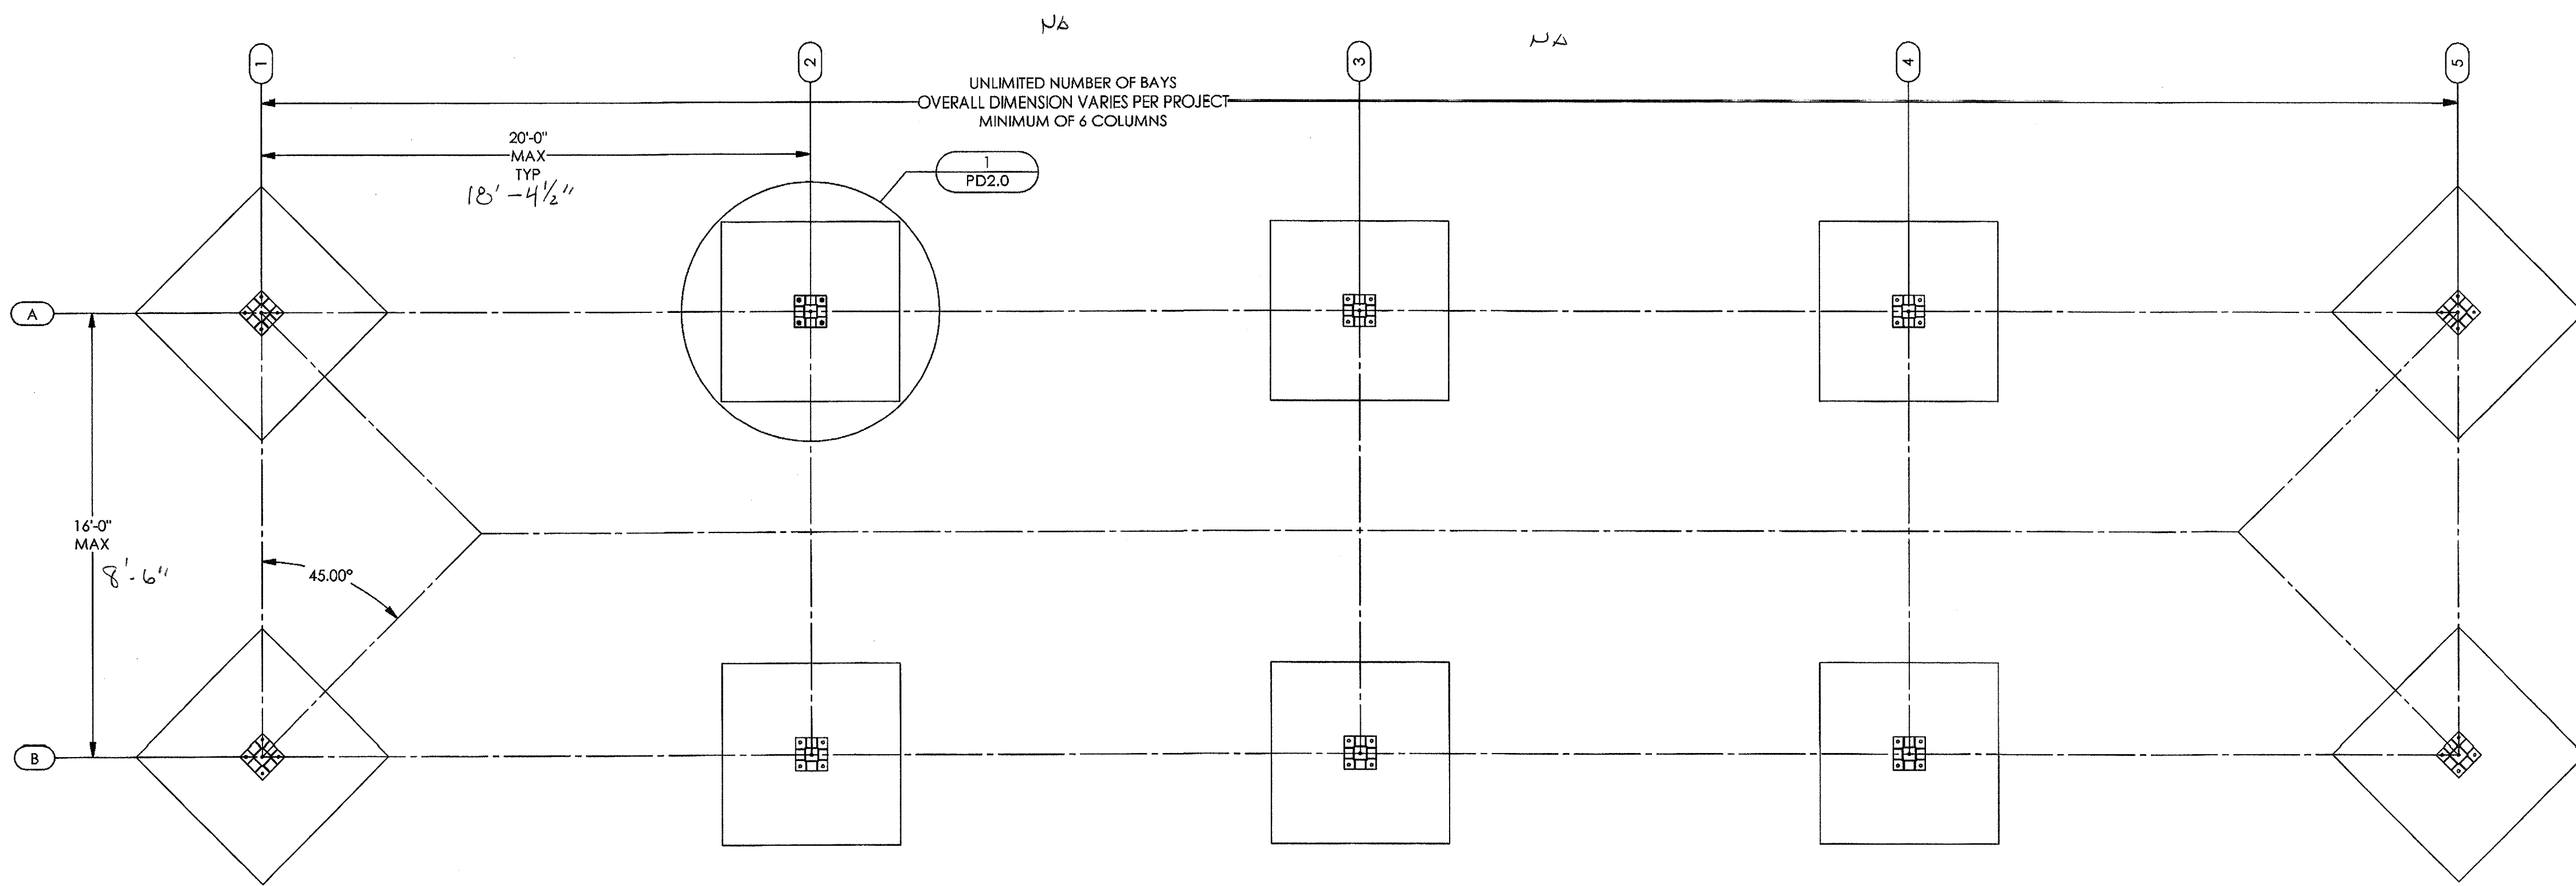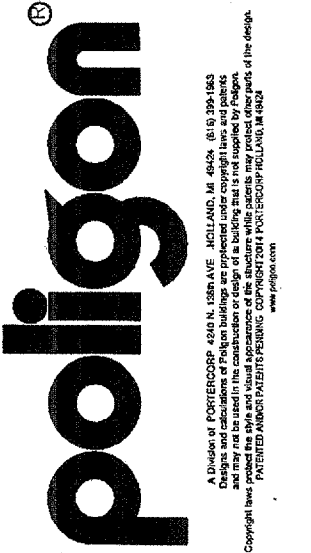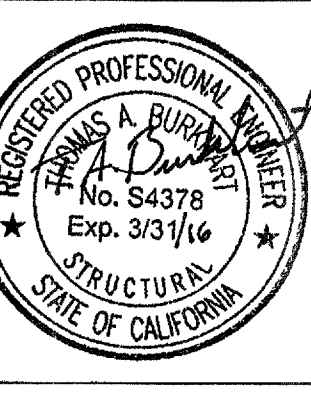


FOUNDATION PLAN (SPREAD PAD)
SCALE: 1/4" = 1'-0"

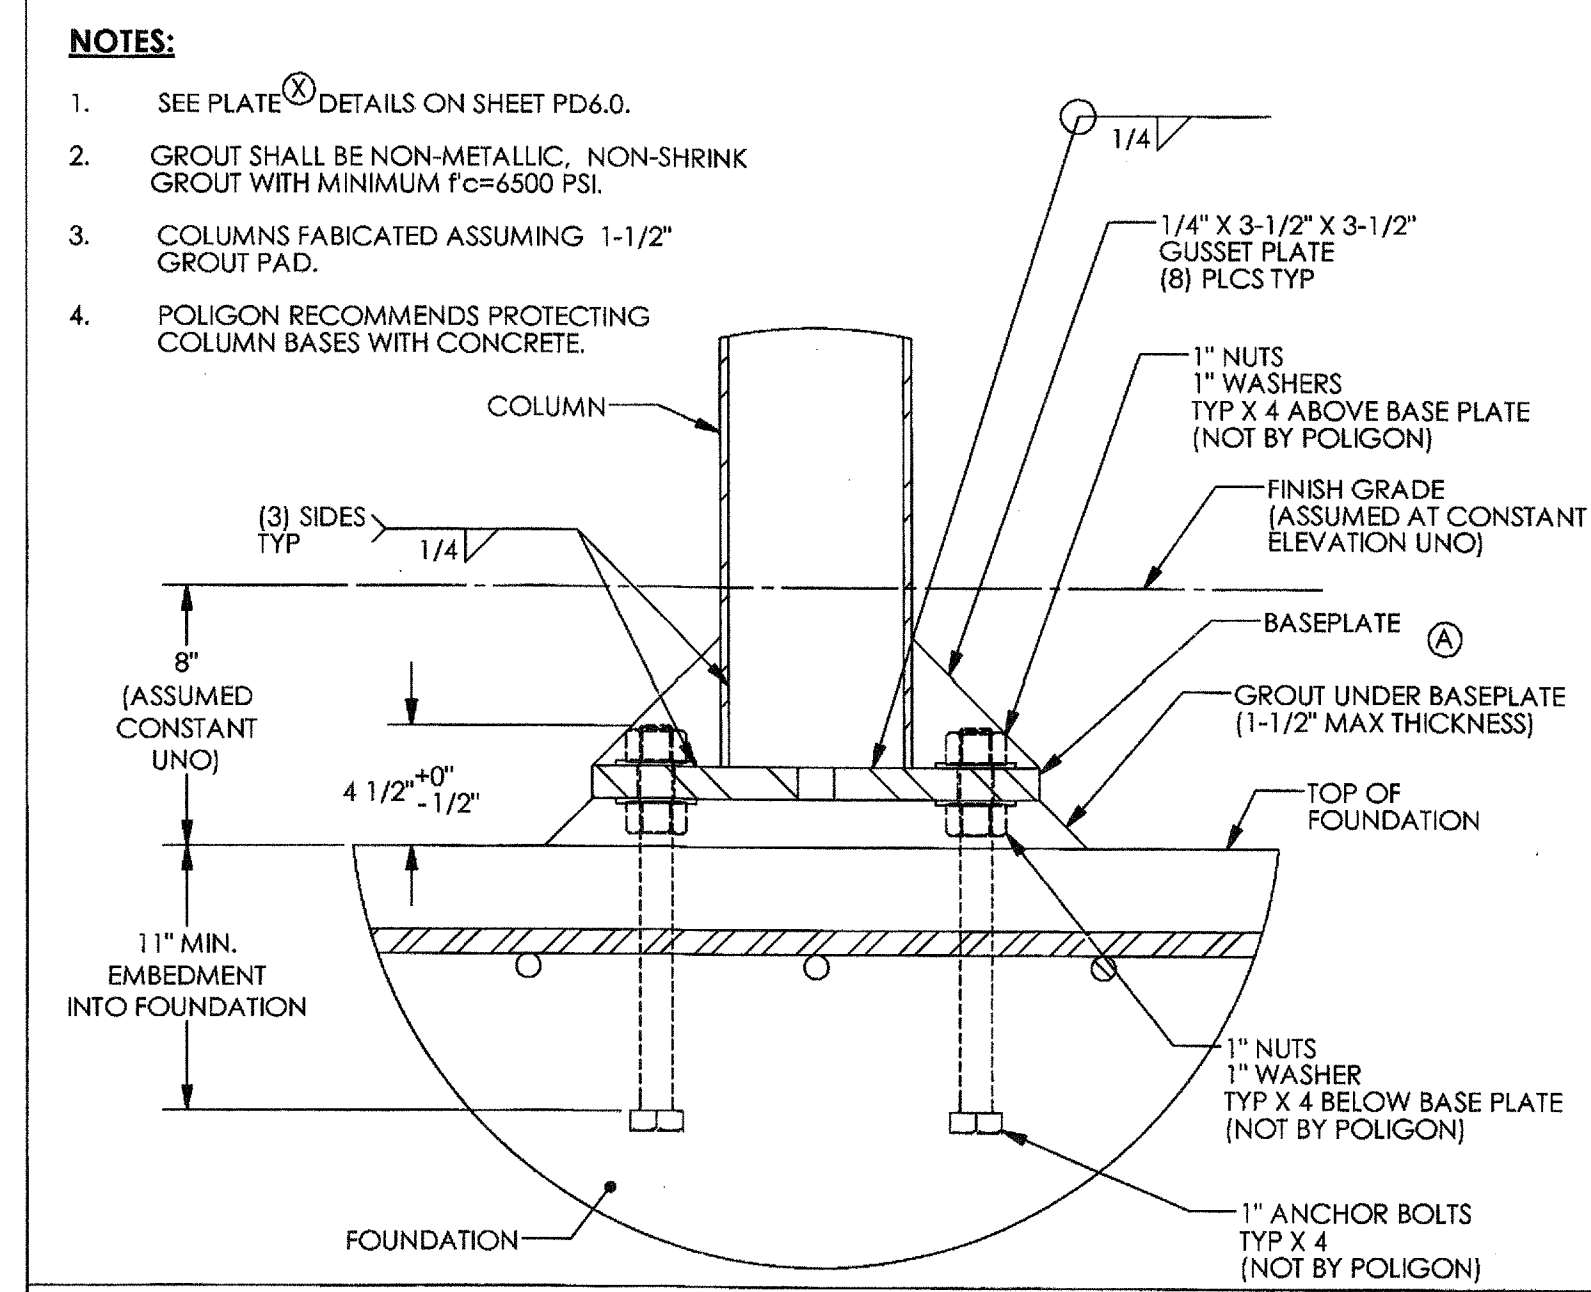

COLUMN BASE PLATE AND ANCHOR BOLTS

3

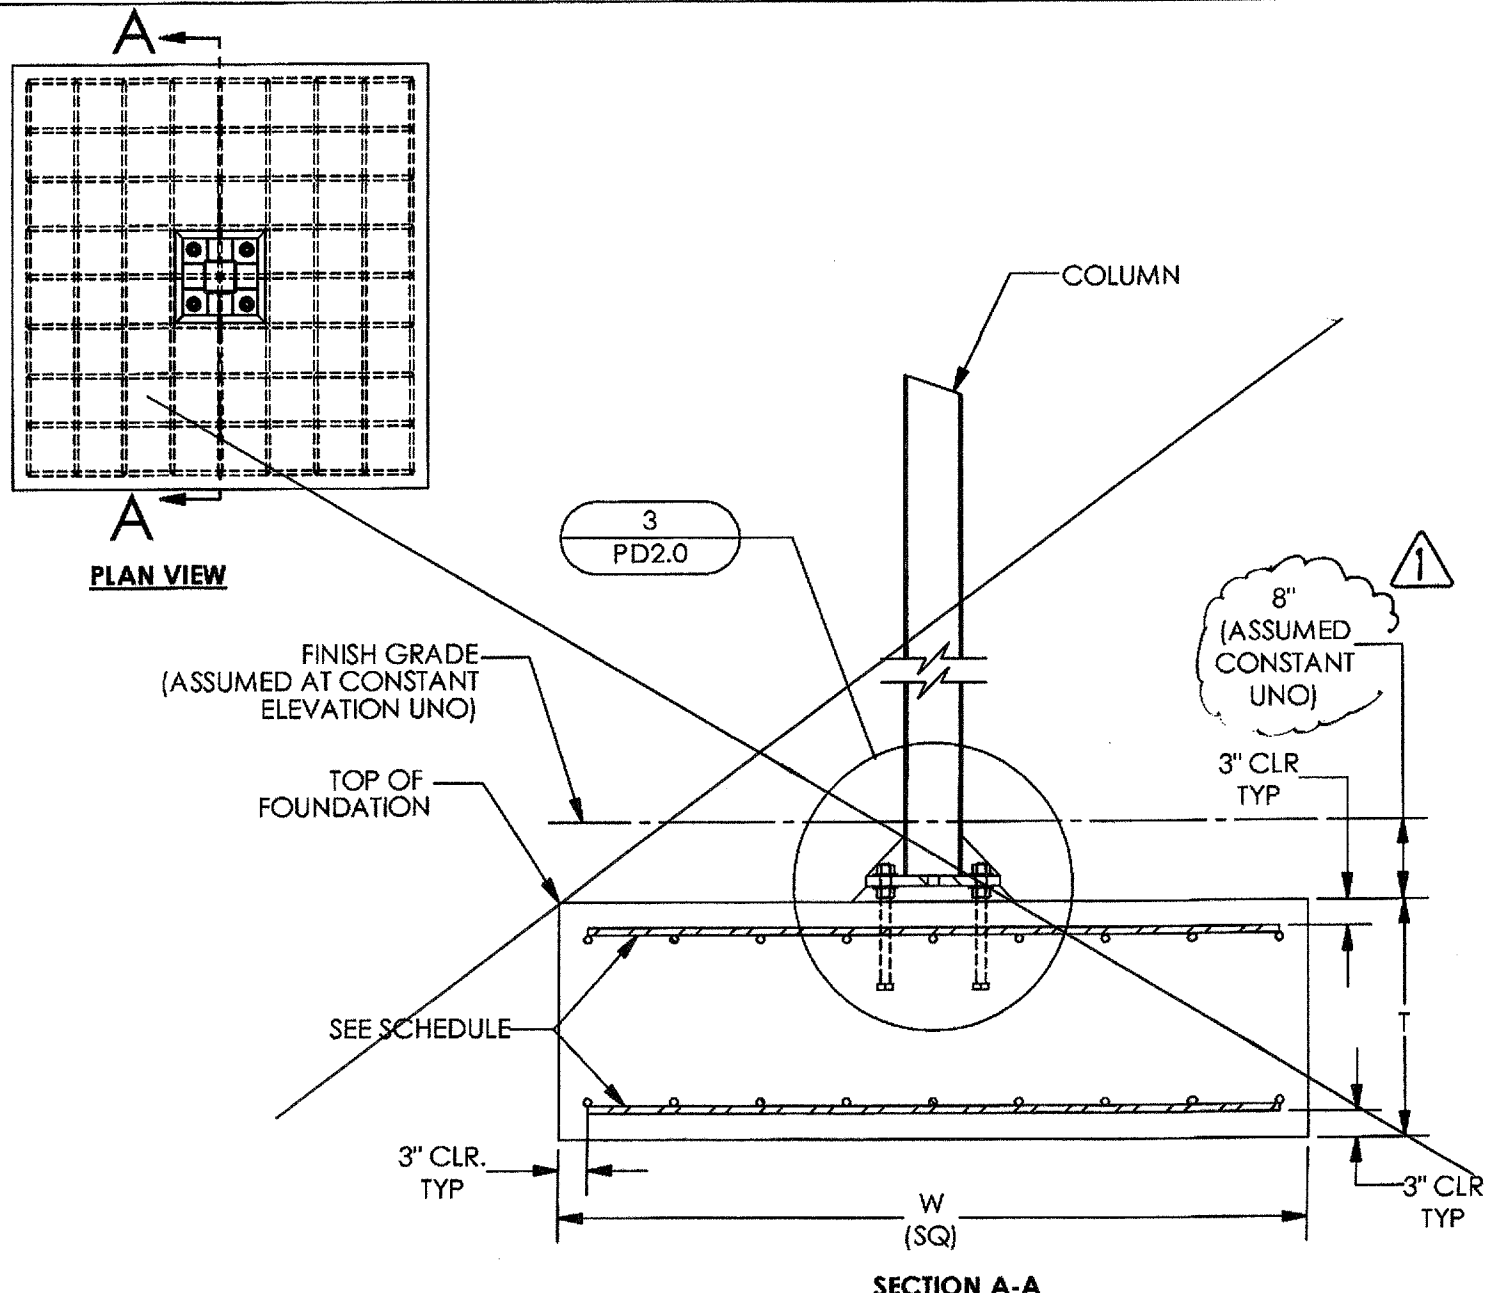


—SPREAD PAD FOUNDATION

1

FOUNDATION REQUIREMENTS VARY PER PROJECT
SEE SHEET PD1.0 FOR REQUIRED LOAD SCENARIO AND FOUNDATION TYPE (STEP 6 OF 'INSTRUCTIONS')
ONLY REFERENCE COPY OF PC DRAWINGS SUBMITTED FOR THIS PROJECT

LOAD SCENARIO	WIDTH (W)	THICKNESS (T)	HORIZONTAL REINFORCING ¹	
			QTY	SIZE
1	6'-0"	1'-6"	6	#6
2	6'-0"	2'-0"	8	#6
3	7'-0"	2'-0"	9	#6
4	7'-6"	2'-0"	9	#6

¹EQUALLY SPACED EACH WAY, TOP AND BOTTOM

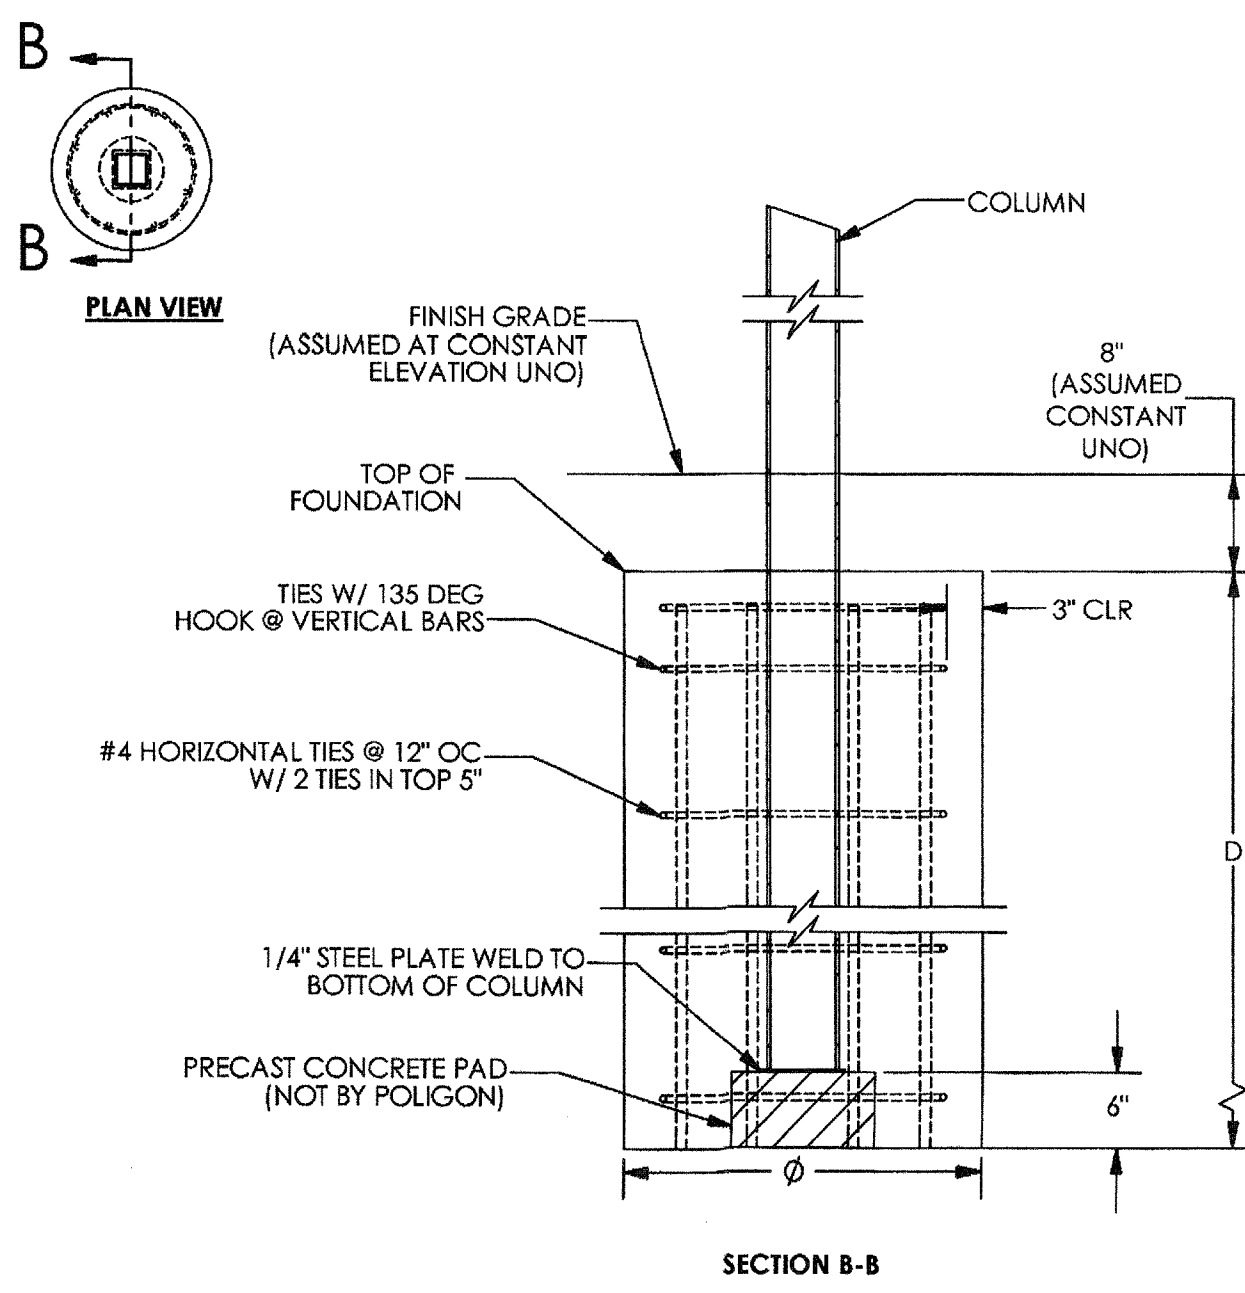

DRILLED PIER FOUNDATION (BURIED COLUMN)

2

FOUNDATION REQUIREMENTS VARY PER PROJECT
SEE SHEET PD1.0 FOR REQUIRED LOAD SCENARIO AND FOUNDATION TYPE (STEP 6 OF 'INSTRUCTIONS')
ONLY REFERENCE COPY OF PC DRAWINGS SUBMITTED FOR THIS PROJECT

LOAD SCENARIO	DIAMETER (Ø)	DEPTH (D)	VERTICAL REINFORCING ¹	
			QTY	SIZE
1	2'-6"	8'-0"	6	#6
2	2'-6"	9'-6"	8	#6
3	2'-6"	10'-0"	8	#6
4	2'-6"	10'-0"	8	#6

¹EQUALLY SPACED AROUND DRILLED PIER

PRIOR TO CONCRETE PLACEMENT, POLYGON STRONGLY RECOMMENDS ERECTING ENOUGH OF THE FRAME (E.G. BEAMS AND PURLINS) TO ENSURE ACCURATE COLUMN SPACING, ROTATION, AND VERTICALITY.

STATE APPROVALS

PRE-CHECK (PC) DOCUMENT

CODE: 2013 CBC

A SEPARATE PROJECT APPLICATION FOR CONSTRUCTION IS REQUIRED.


FOUNDATION PLAN
RAM 20

HIP ROOF (RAM)
PC DRAWINGS


DRAWN BY: JMD
CHECKED BY: CE
POLYGON # 51458

PD2.0


IDENTIFICATION STAMP
DIV. OF THE STATE ARCHITECT
U3 118709
JAN 17 2016

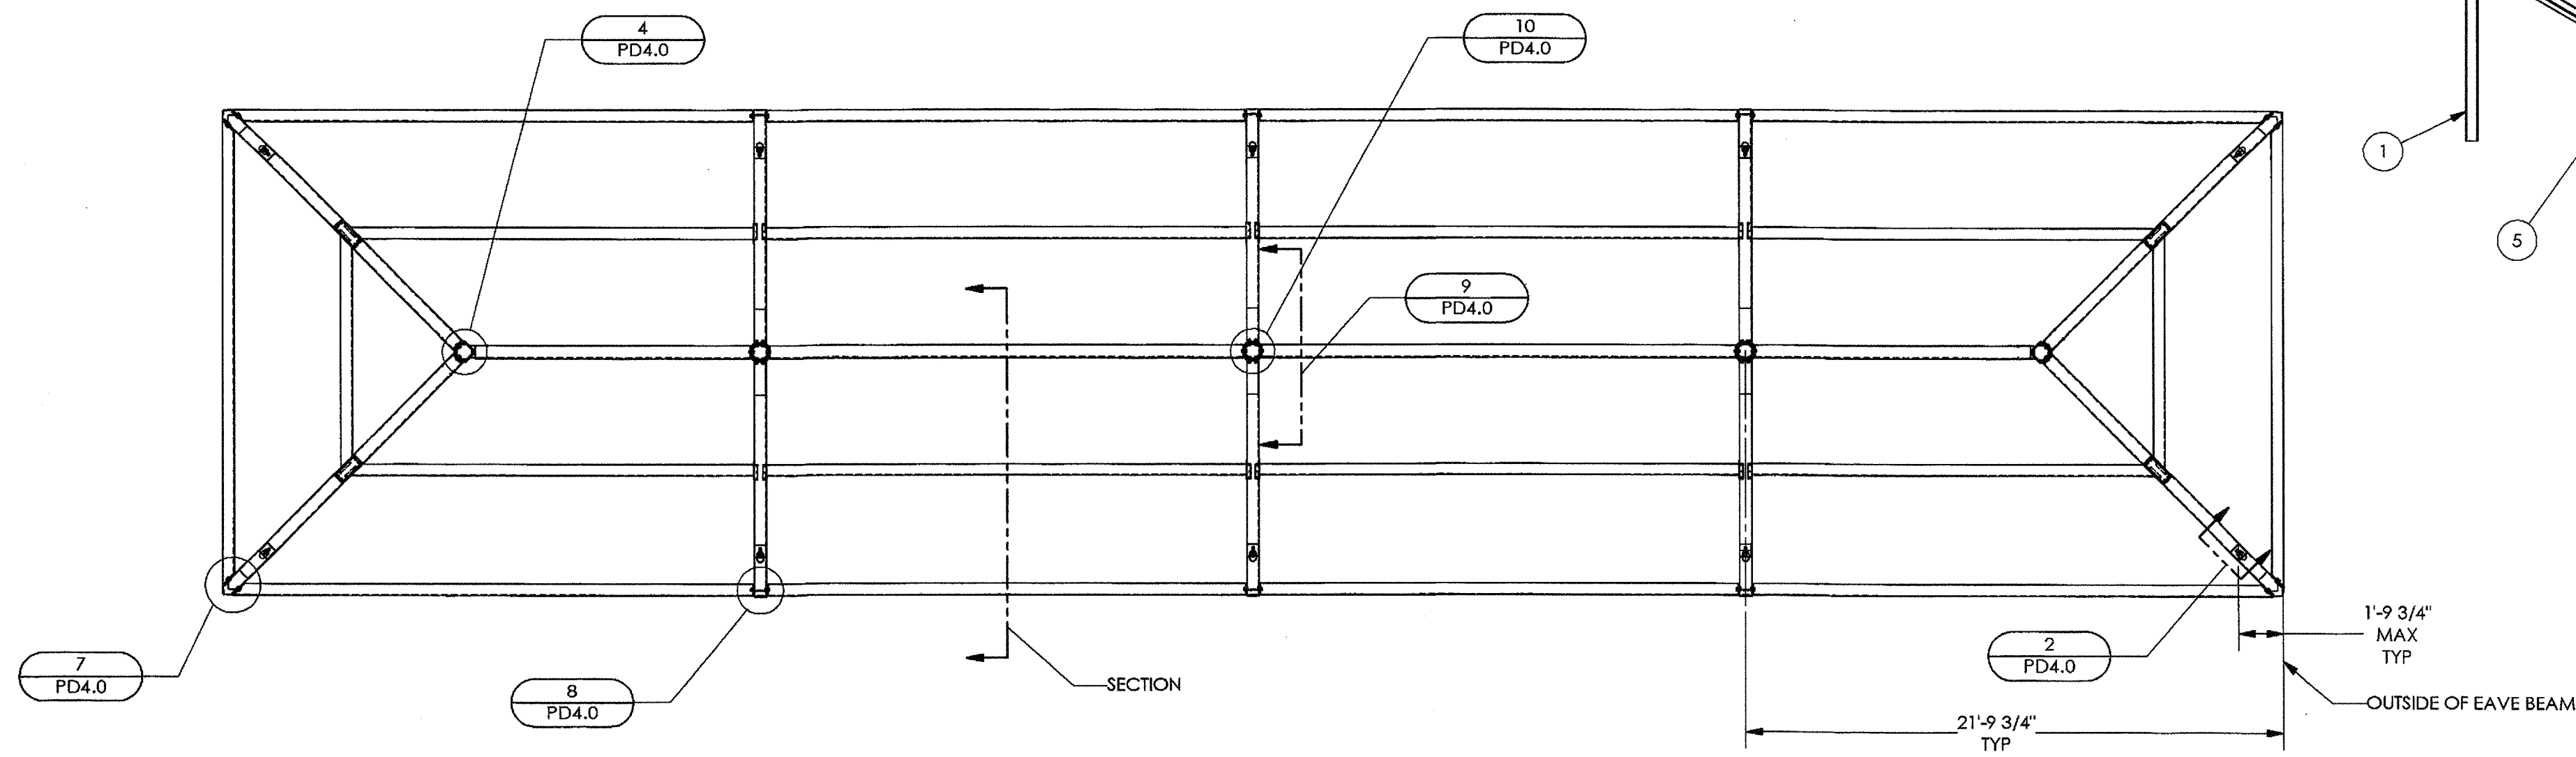


PLAN VIEW
SCALE: 3/16" = 1'-0"

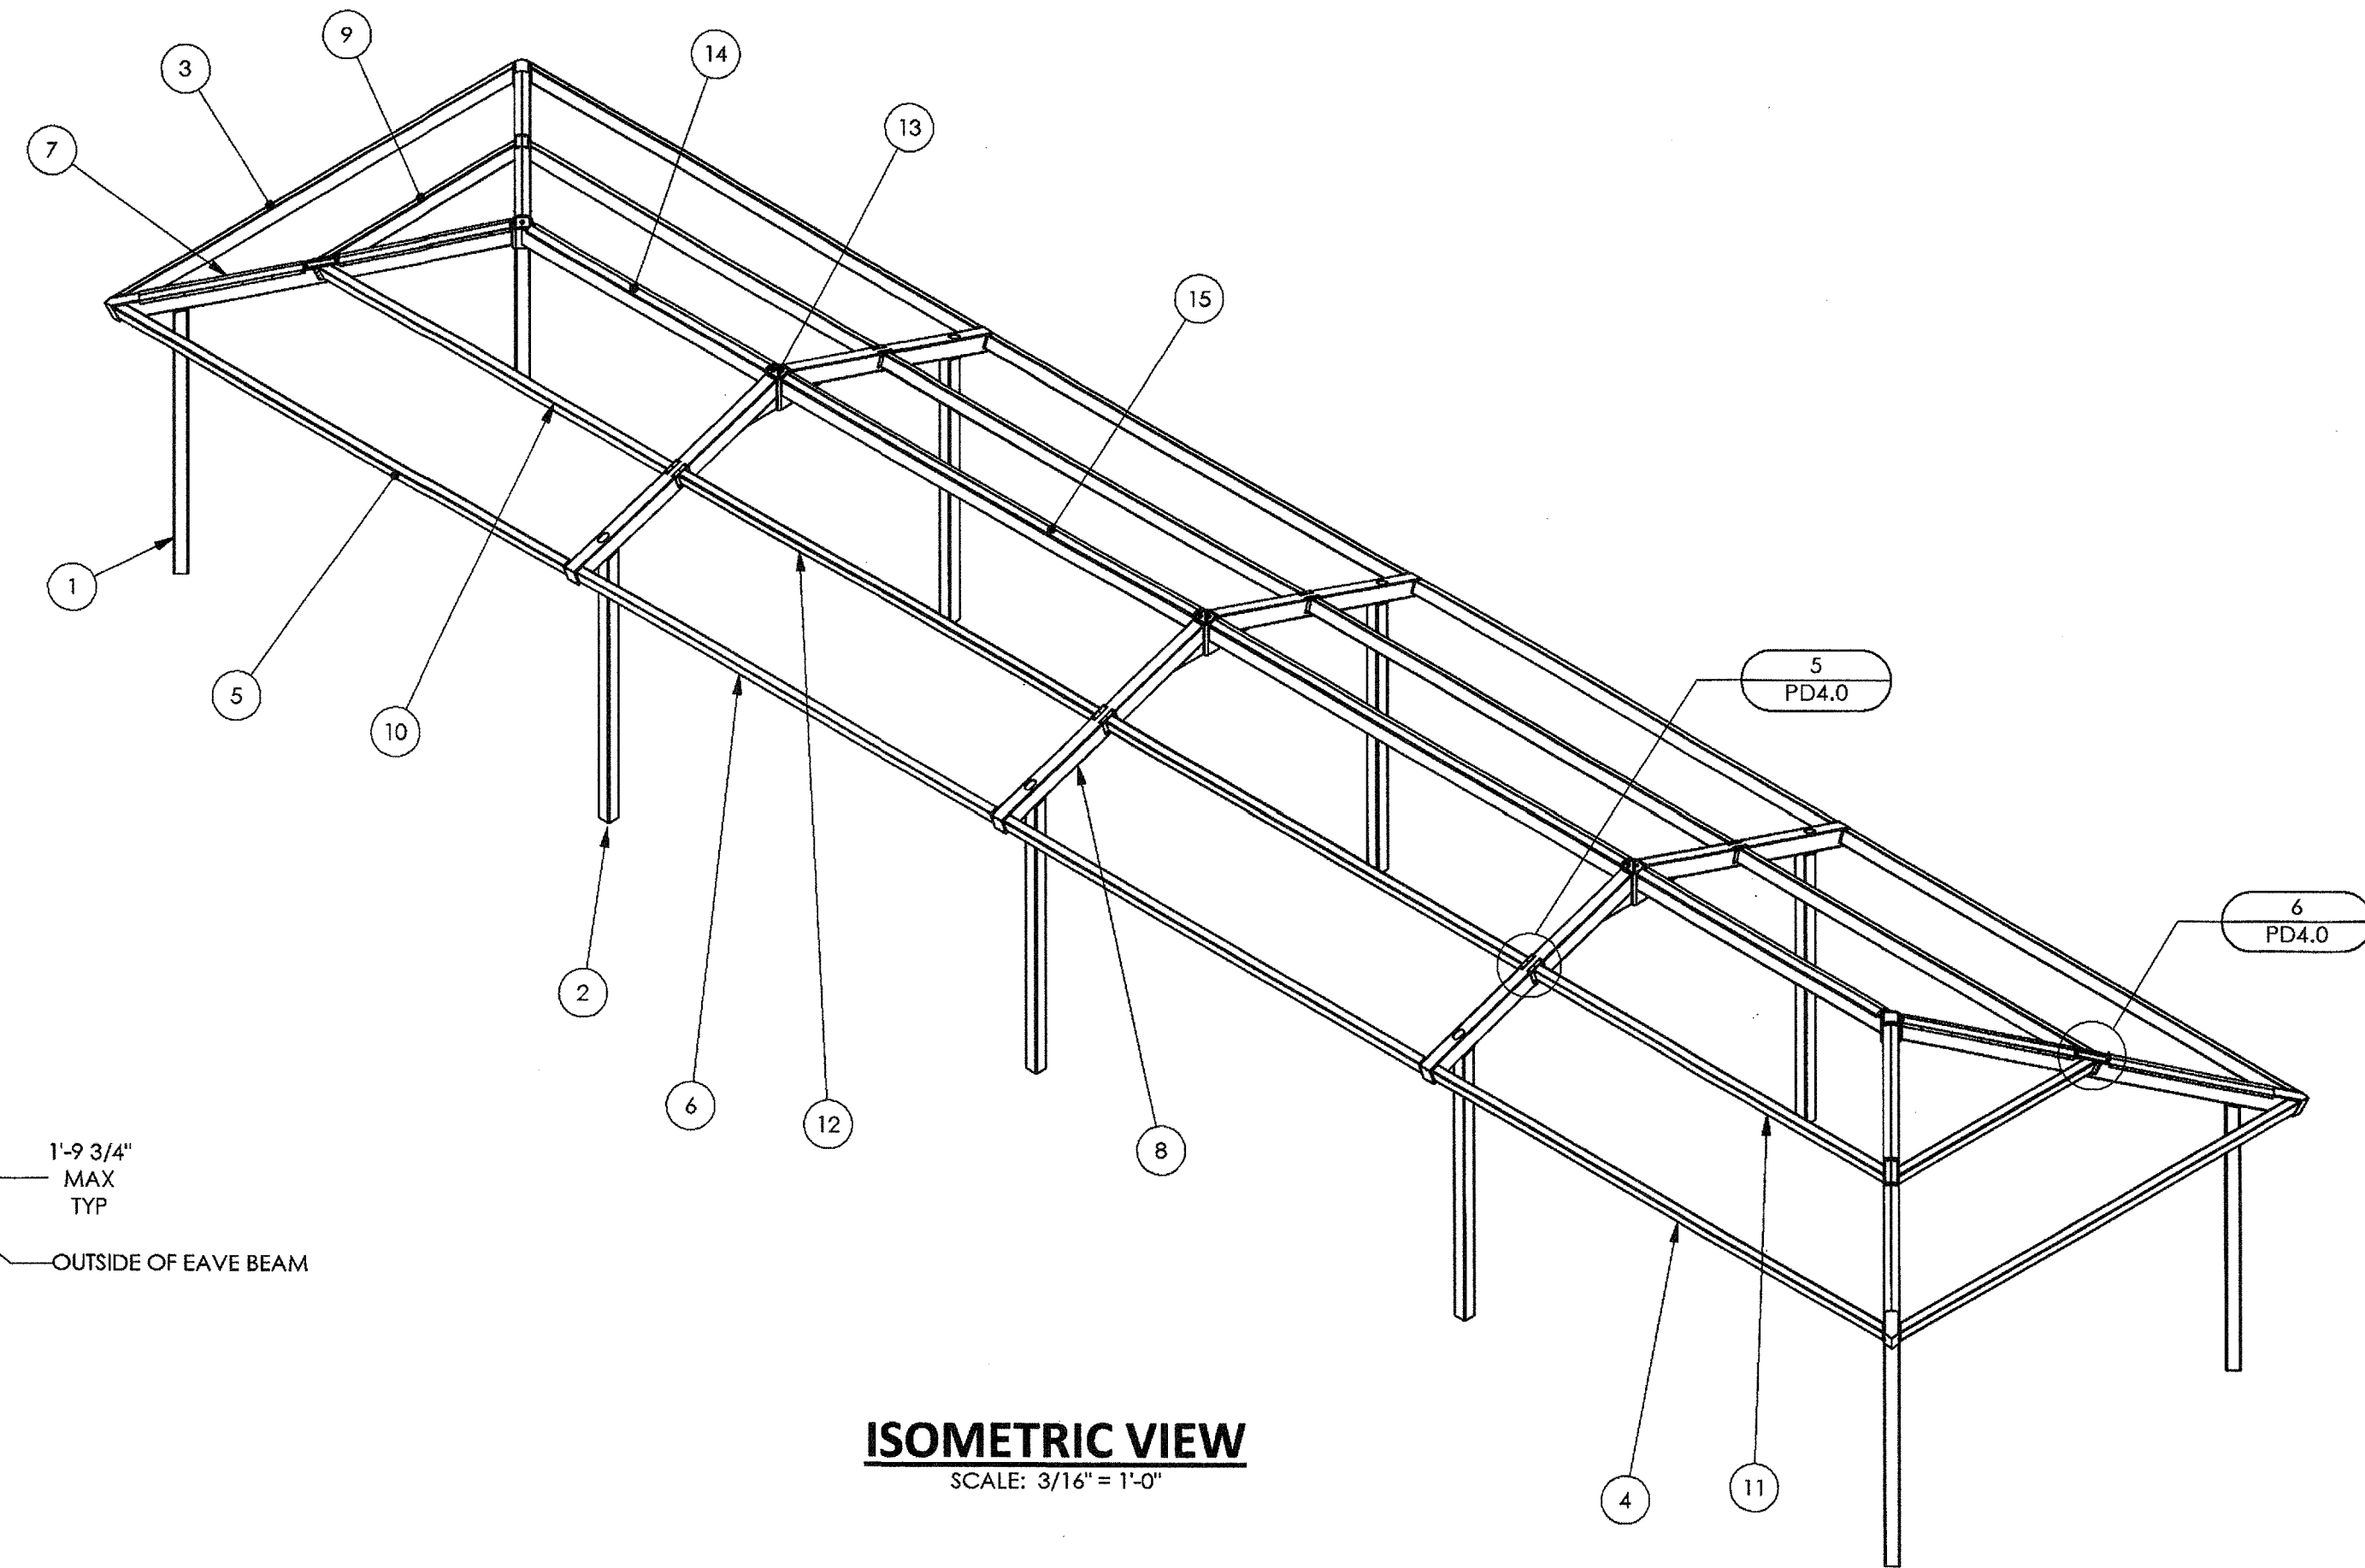


ISOMETRIC VIEW
SCALE: 3/16" = 1'-0"

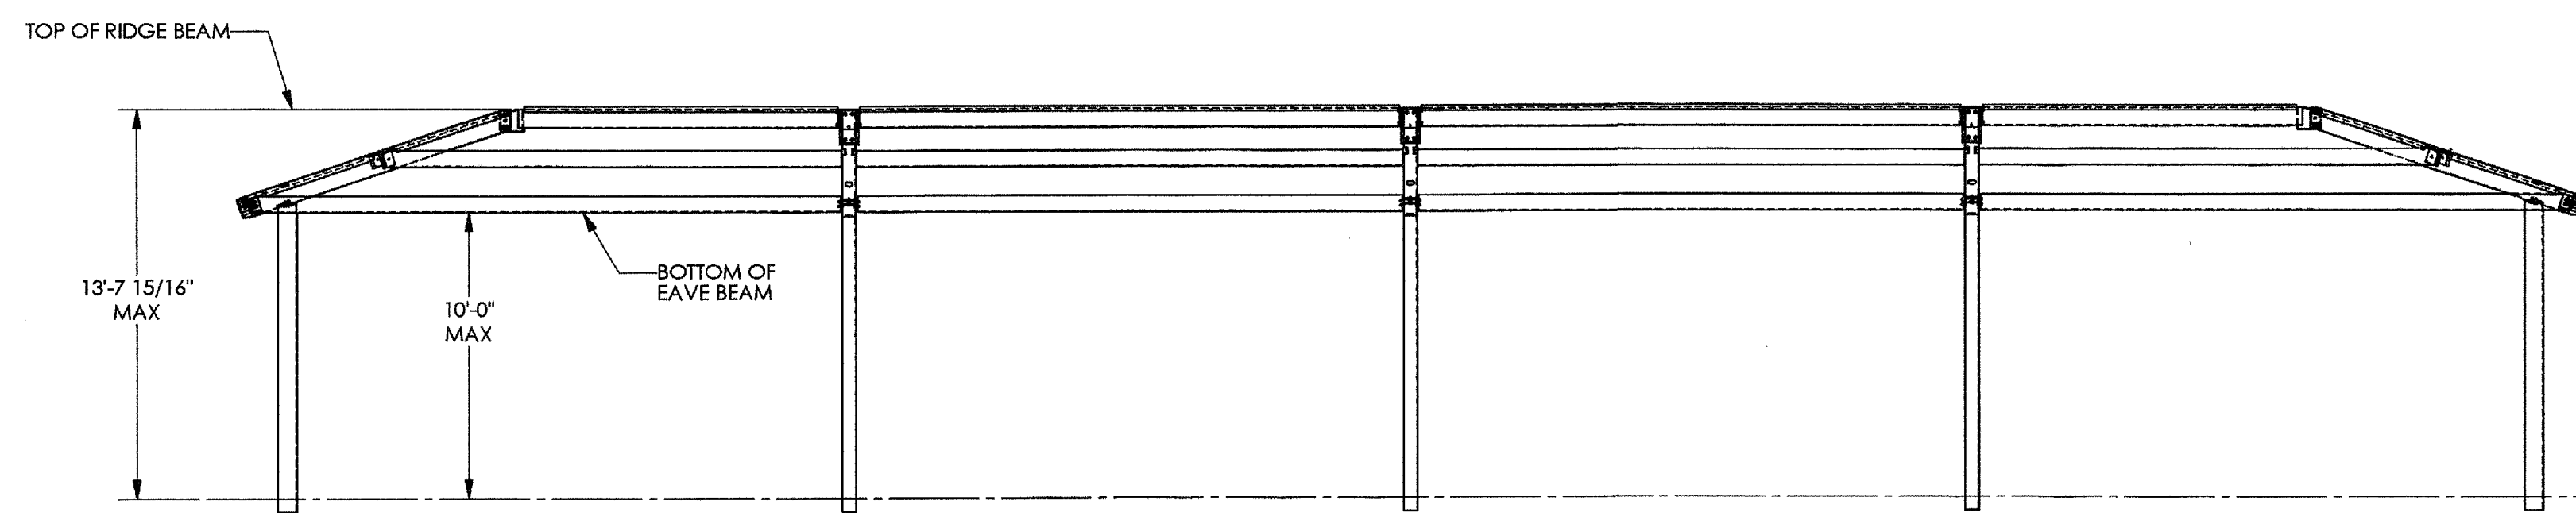

FRONT ELEVATION
SCALE: 3/16" = 1'-0"




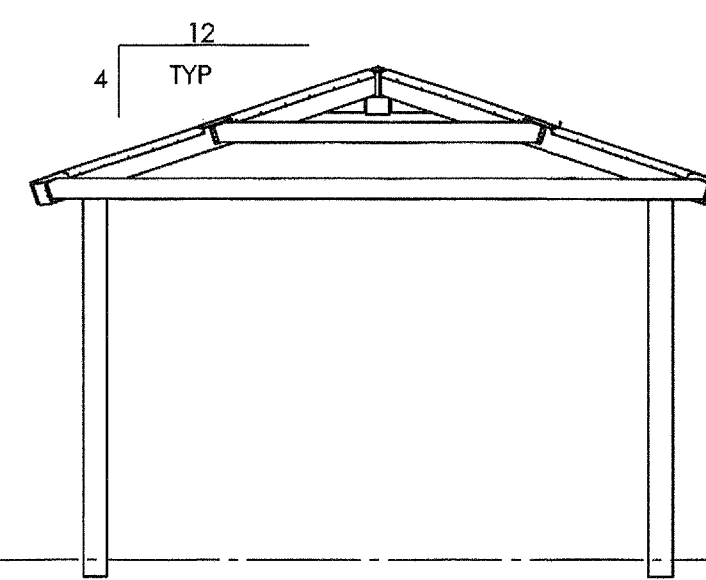


SIDE ELEVATION
SCALE: 3/16" = 1'-0"

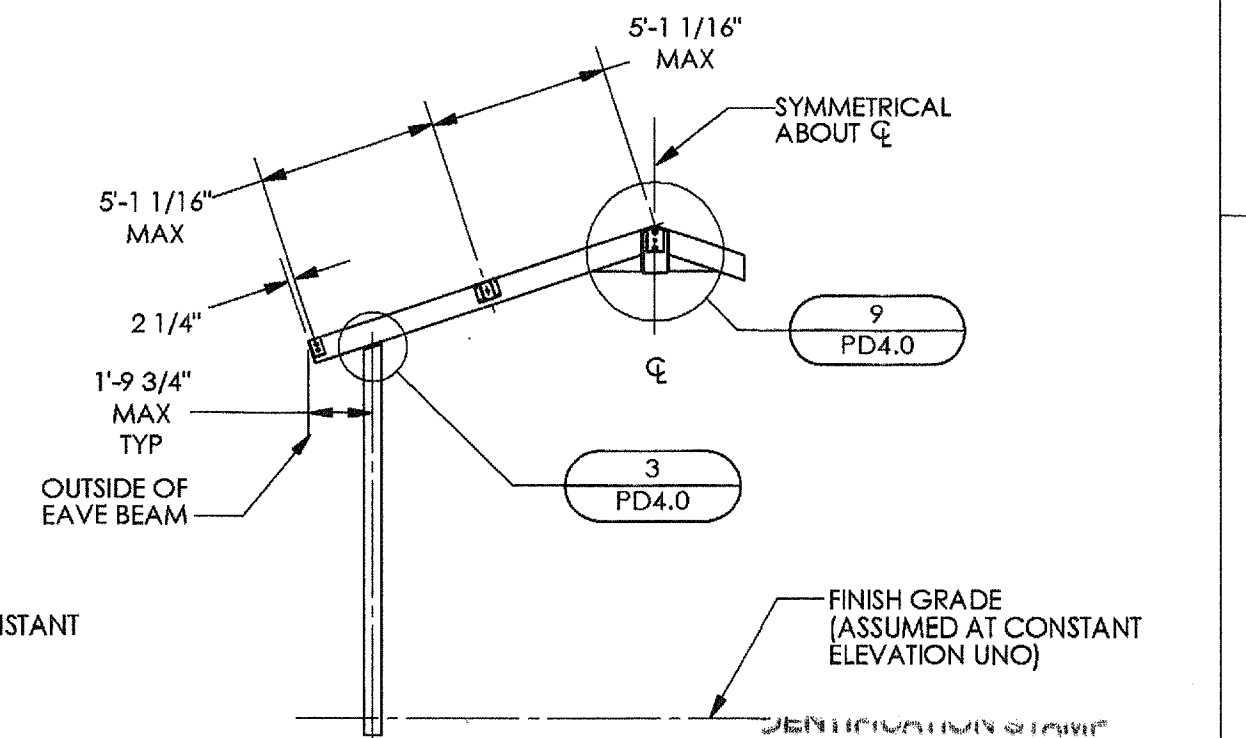

SECTION
SCALE: 3/16" = 1'-0"

ITEM	FRAME /QTY.	PART NO.	DESCRIPTION	MATERIAL
15	2	-	RIDGE BEAM ASM, MID	HSSBX6X3/16
14	2	-	RIDGE BEAM ASM, END	HSSBX6X3/16
13	3	-	COMPRESSION TUBE ASM	HSSBX8X5/8
12	4	-	PURLIN ASM, SIDE	HSS6X4X3/16
11	2	-	PURLIN ASM, RH	HSS6X4X3/16
10	2	-	PURLIN ASM, LH	HSS6X4X3/16
9	2	-	PURLIN ASM, END	HSS6X4X3/16
8	6	-	GABLE BEAM ASM	HSSBX6X3/16
7	4	-	HIP BEAM ASM	HSSBX6X3/16
6	4	-	EAVE BEAM ASM, SIDE	HSS6X4X1/8
5	2	-	EAVE BEAM ASM, RH	HSS6X4X1/8
4	2	-	EAVE BEAM ASM, LH	HSS6X4X1/8
3	2	-	EAVE BEAM ASM, END	HSS6X4X1/8
2	6	-	COLUMN ASM, SIDE	HSS6X6X1/4
1	4	-	COLUMN ASM, CORNER	HSS6X6X1/4

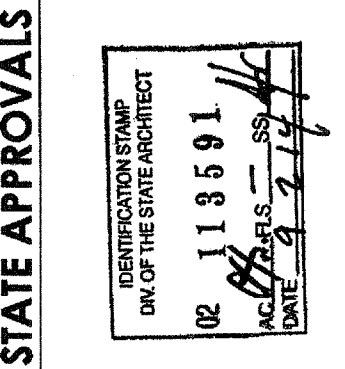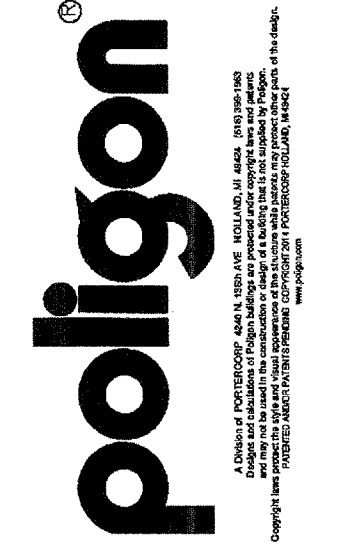


PRE-CHECK (PC) DOCUMENT
CODE: 2013 CBC
A SEPARATE PROJECT APPLICATION FOR CONSTRUCTION IS REQUIRED.

FRAMING PLAN
RAM 20
HIP ROOF (RAM)
PC DRAWINGS

PD3.0


DRAWN BY: JMD
CHECKED BY: CE
POLYGON #: 51458

ALL HIDDEN NUTS AND BOLTS (INSTALLED IN SHOP DURING FABRICATION) ARE SECURED WITH THIS NUT AND BOLT RESTAINING SYSTEM.

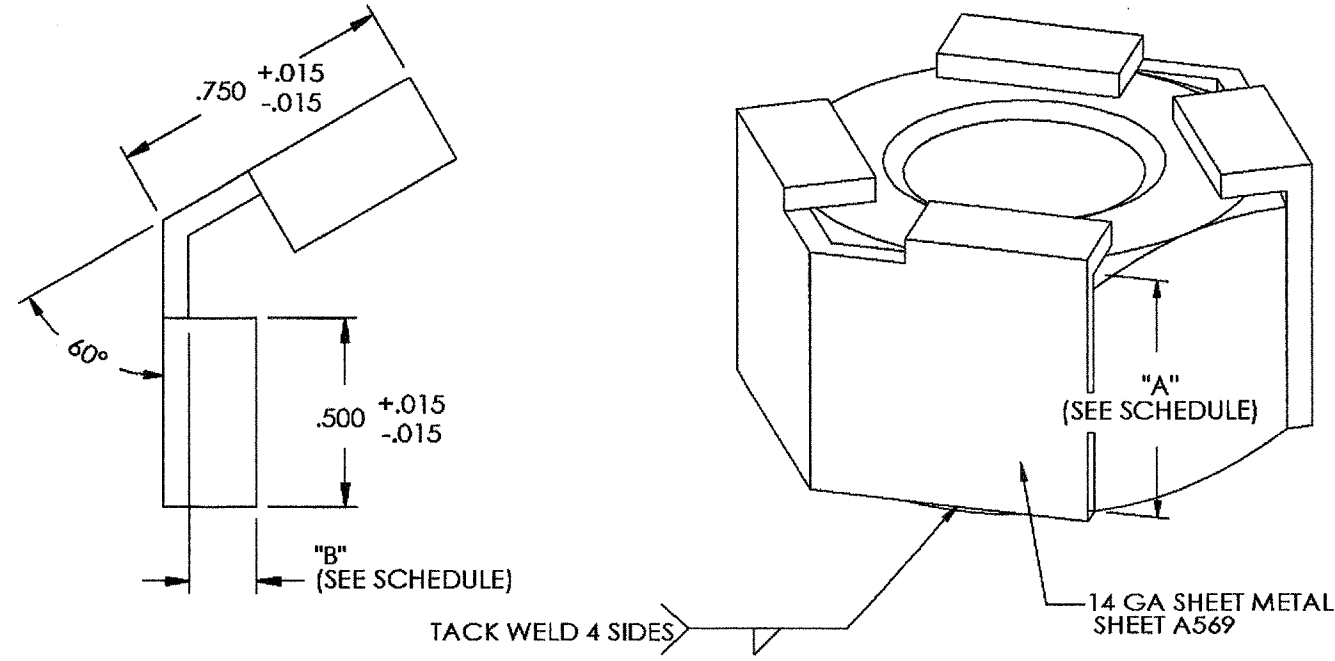


DIMENSION SCHEDULE


FASTENER	DIM A	DIM B
5/8" NUT	.631 +.000 -.015	.180 +.015 -.015
5/8" BOLT	.403 +.000 -.015	.250 +.015 -.015
3/4" NUT	.758 +.000 -.015	.180 +.015 -.015
3/4" BOLT	.483 +.000 -.015	.375 +.015 -.015
1" NUT	1.012 +.000 -.015	.180 +.015 -.015
1" BOLT	.643 +.000 -.015	.375 +.015 -.015

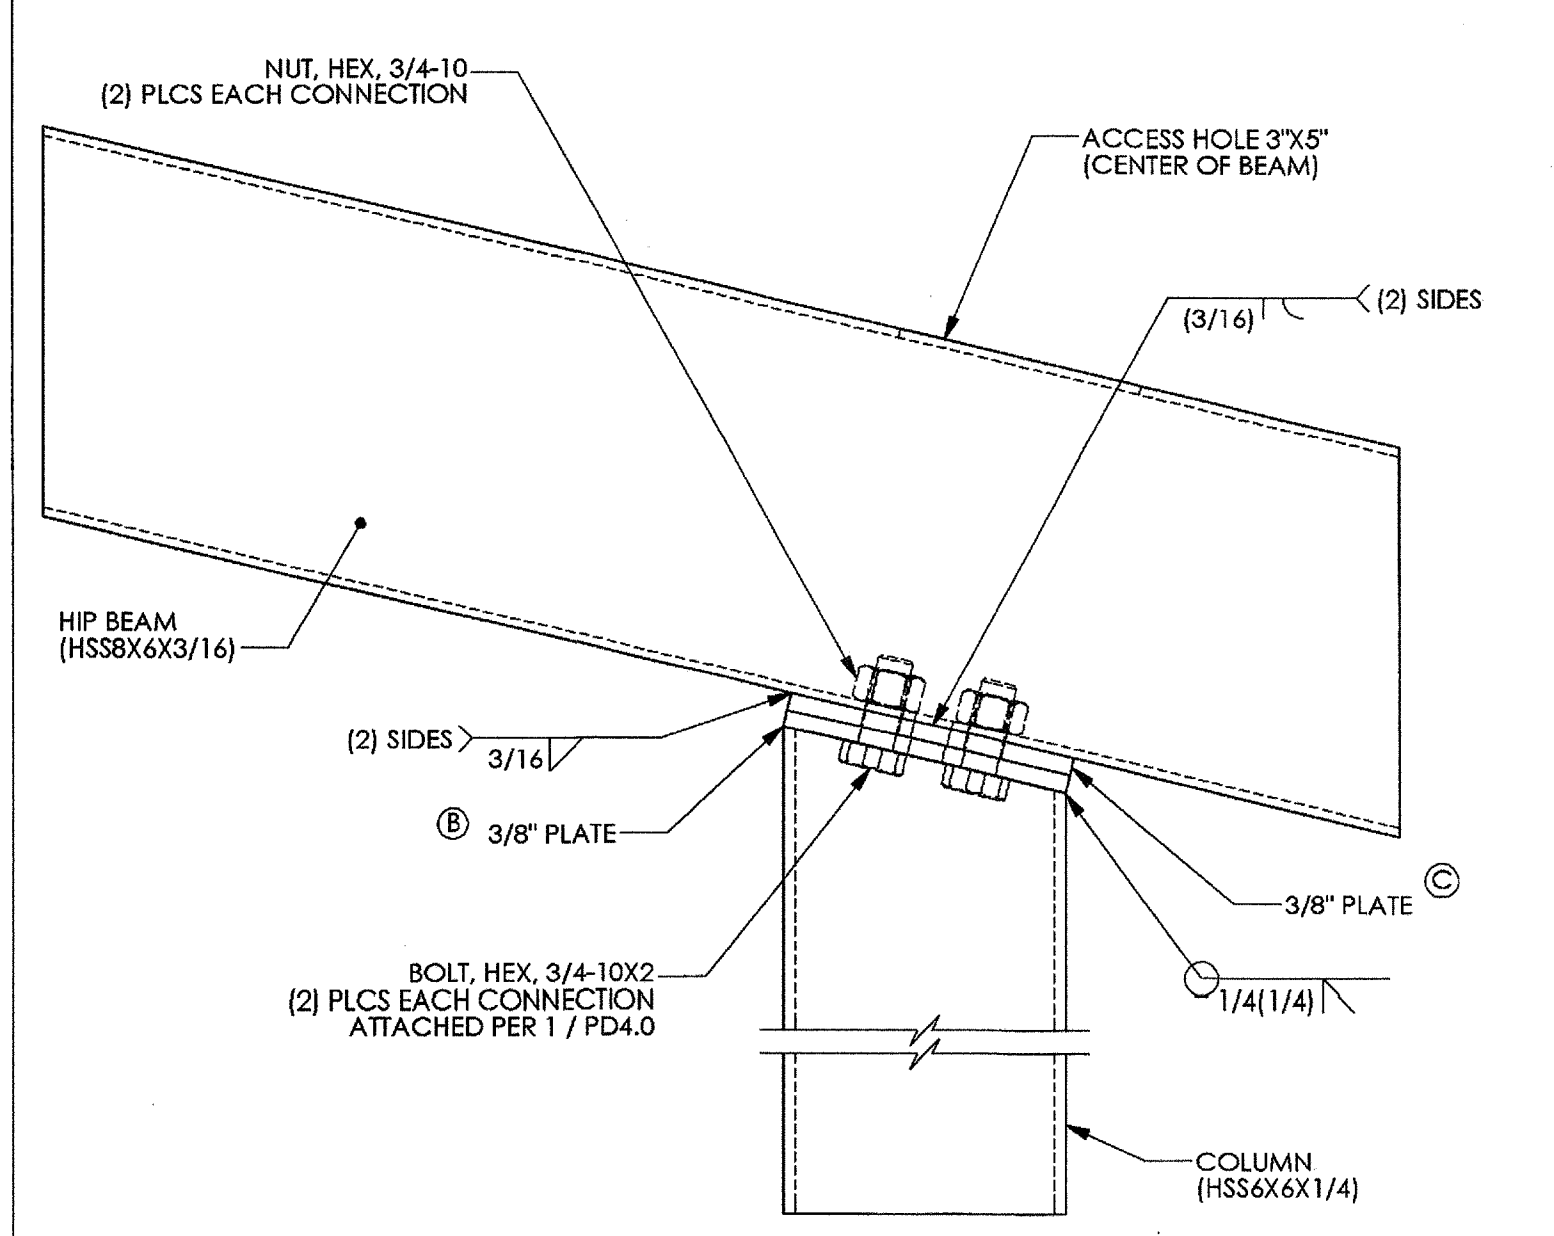


HIP BEAM CONNECTION @ COLUMN

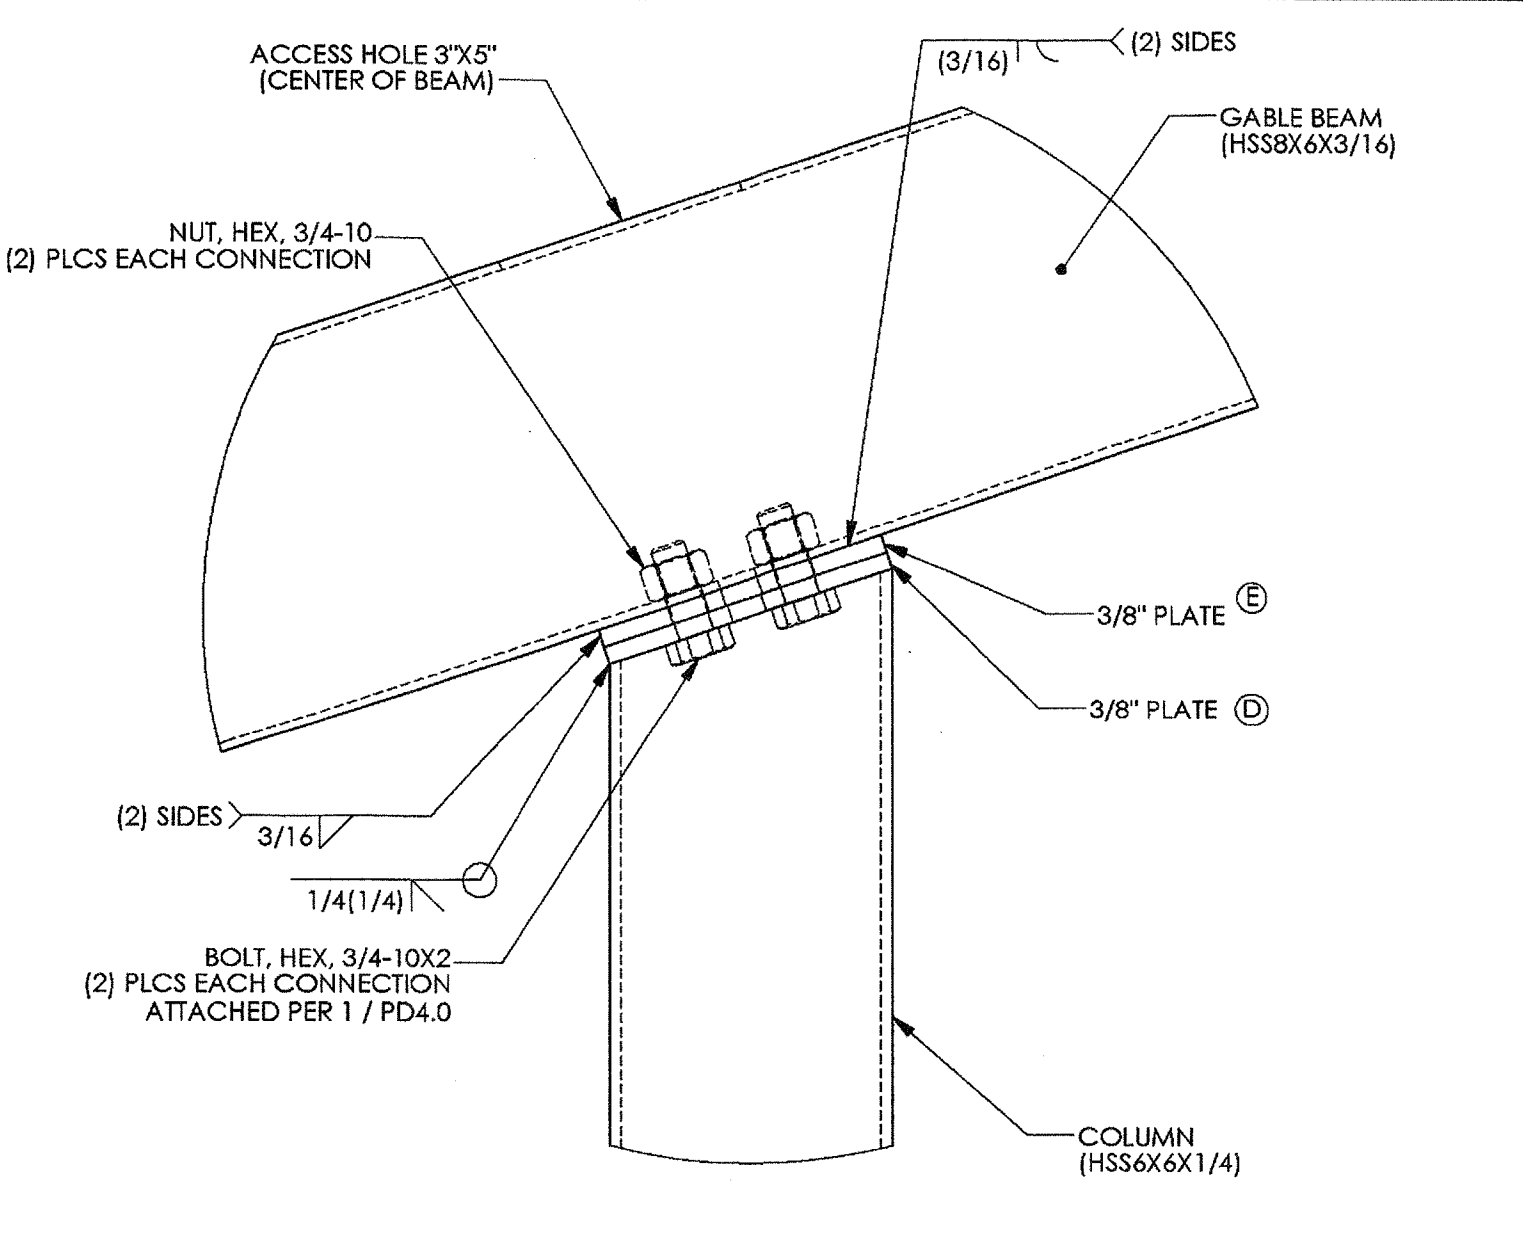


GABLE BEAM CONNECTION @ COLUMN

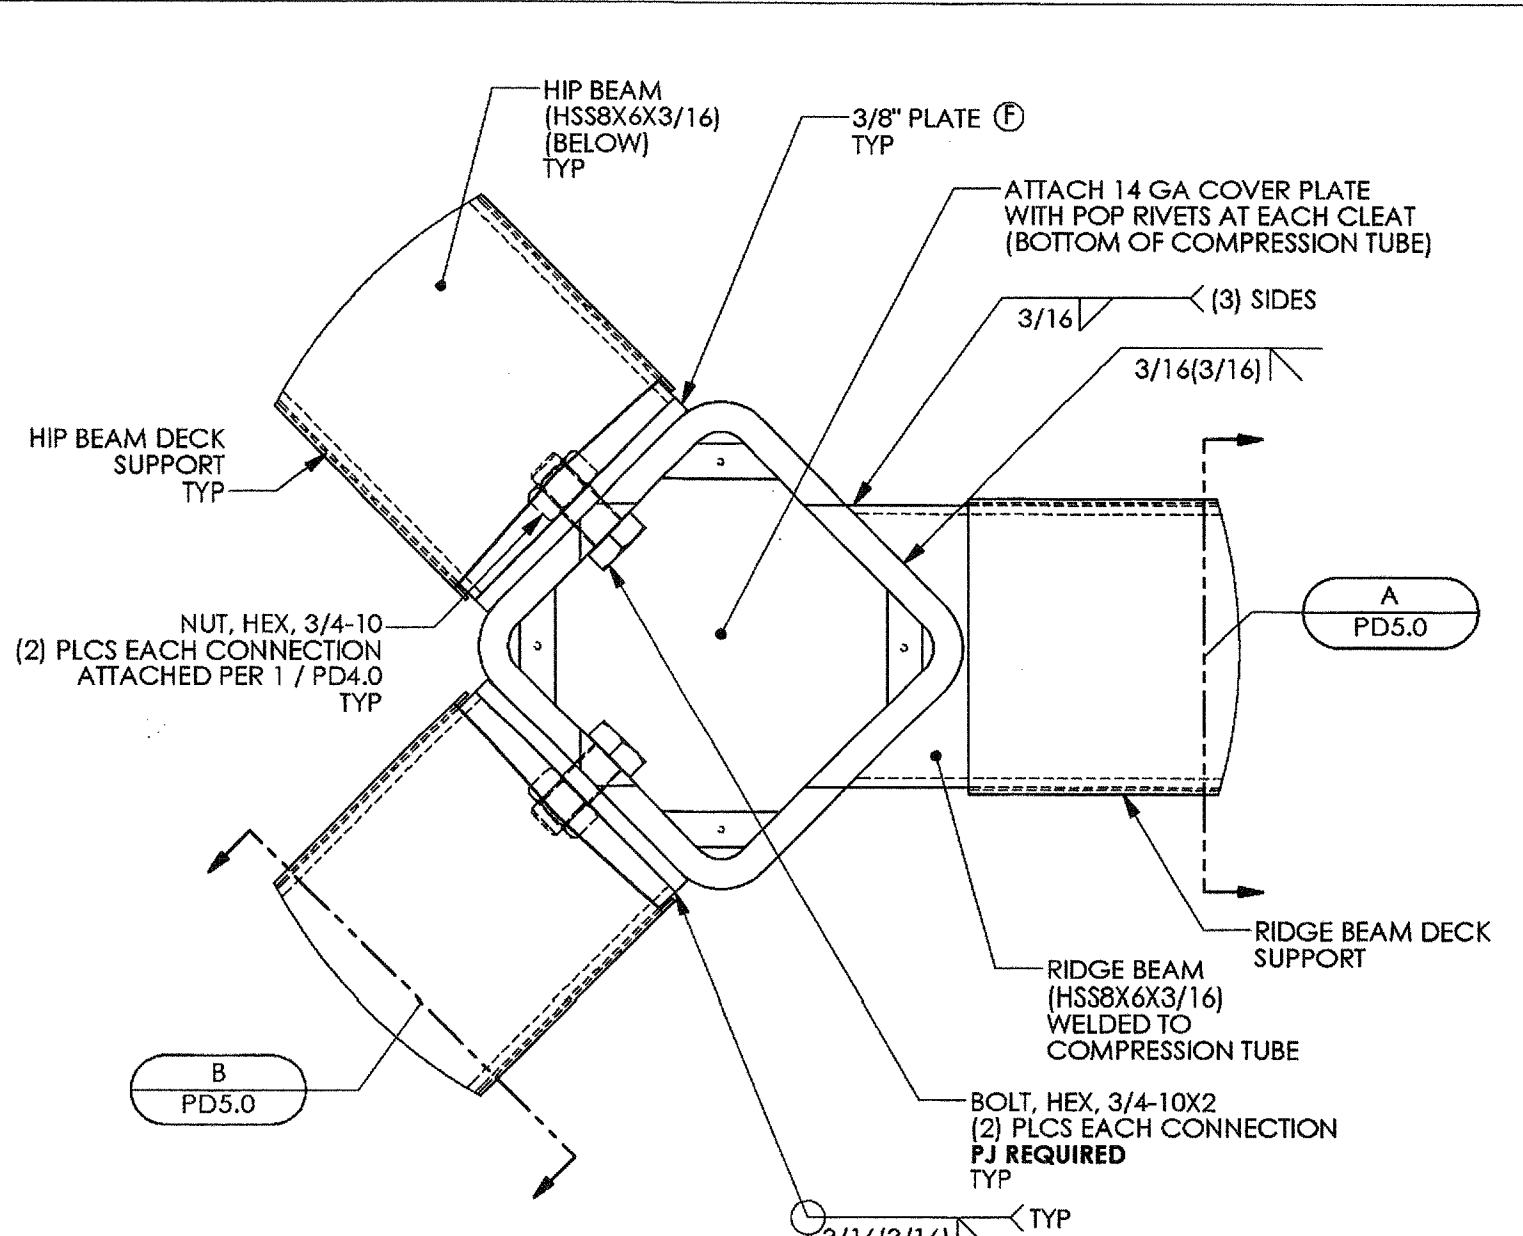


HIP BEAM CONNECTION @ COMPRESSION TUBE

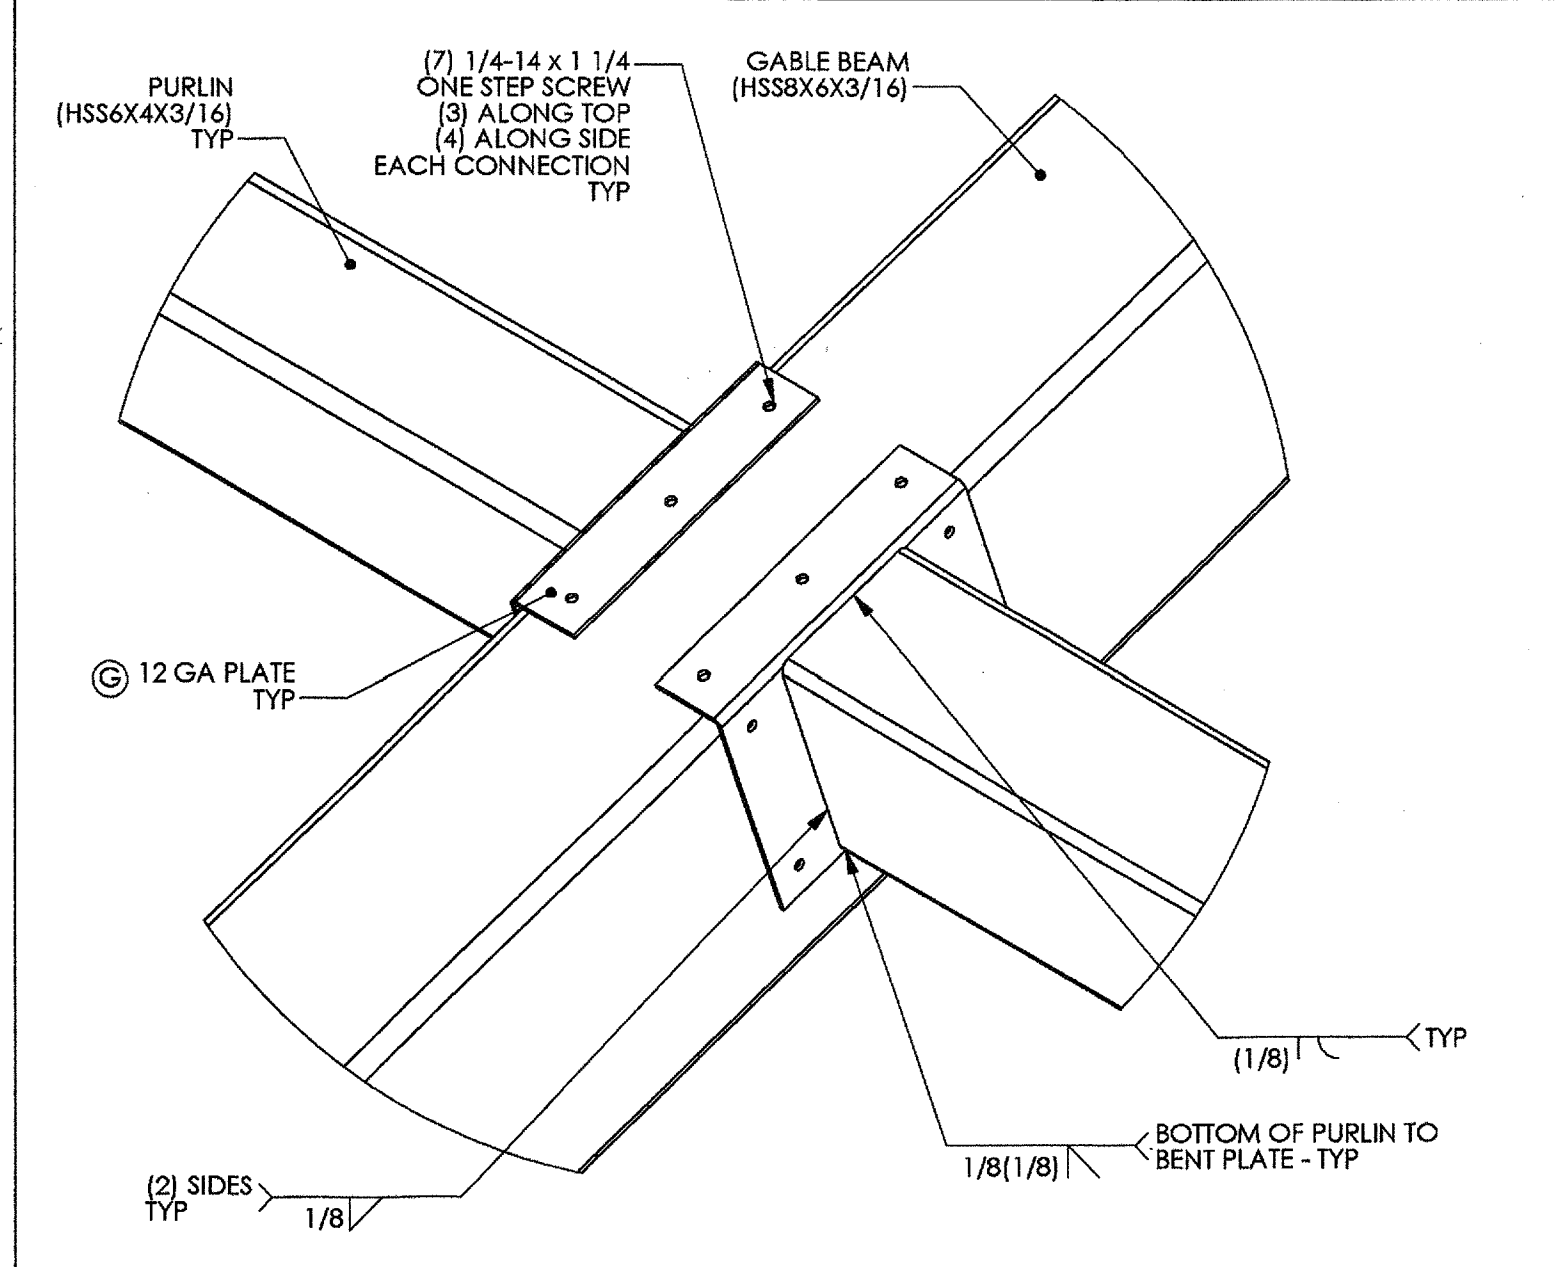


PURLIN CONNECTION @ GABLE BEAM

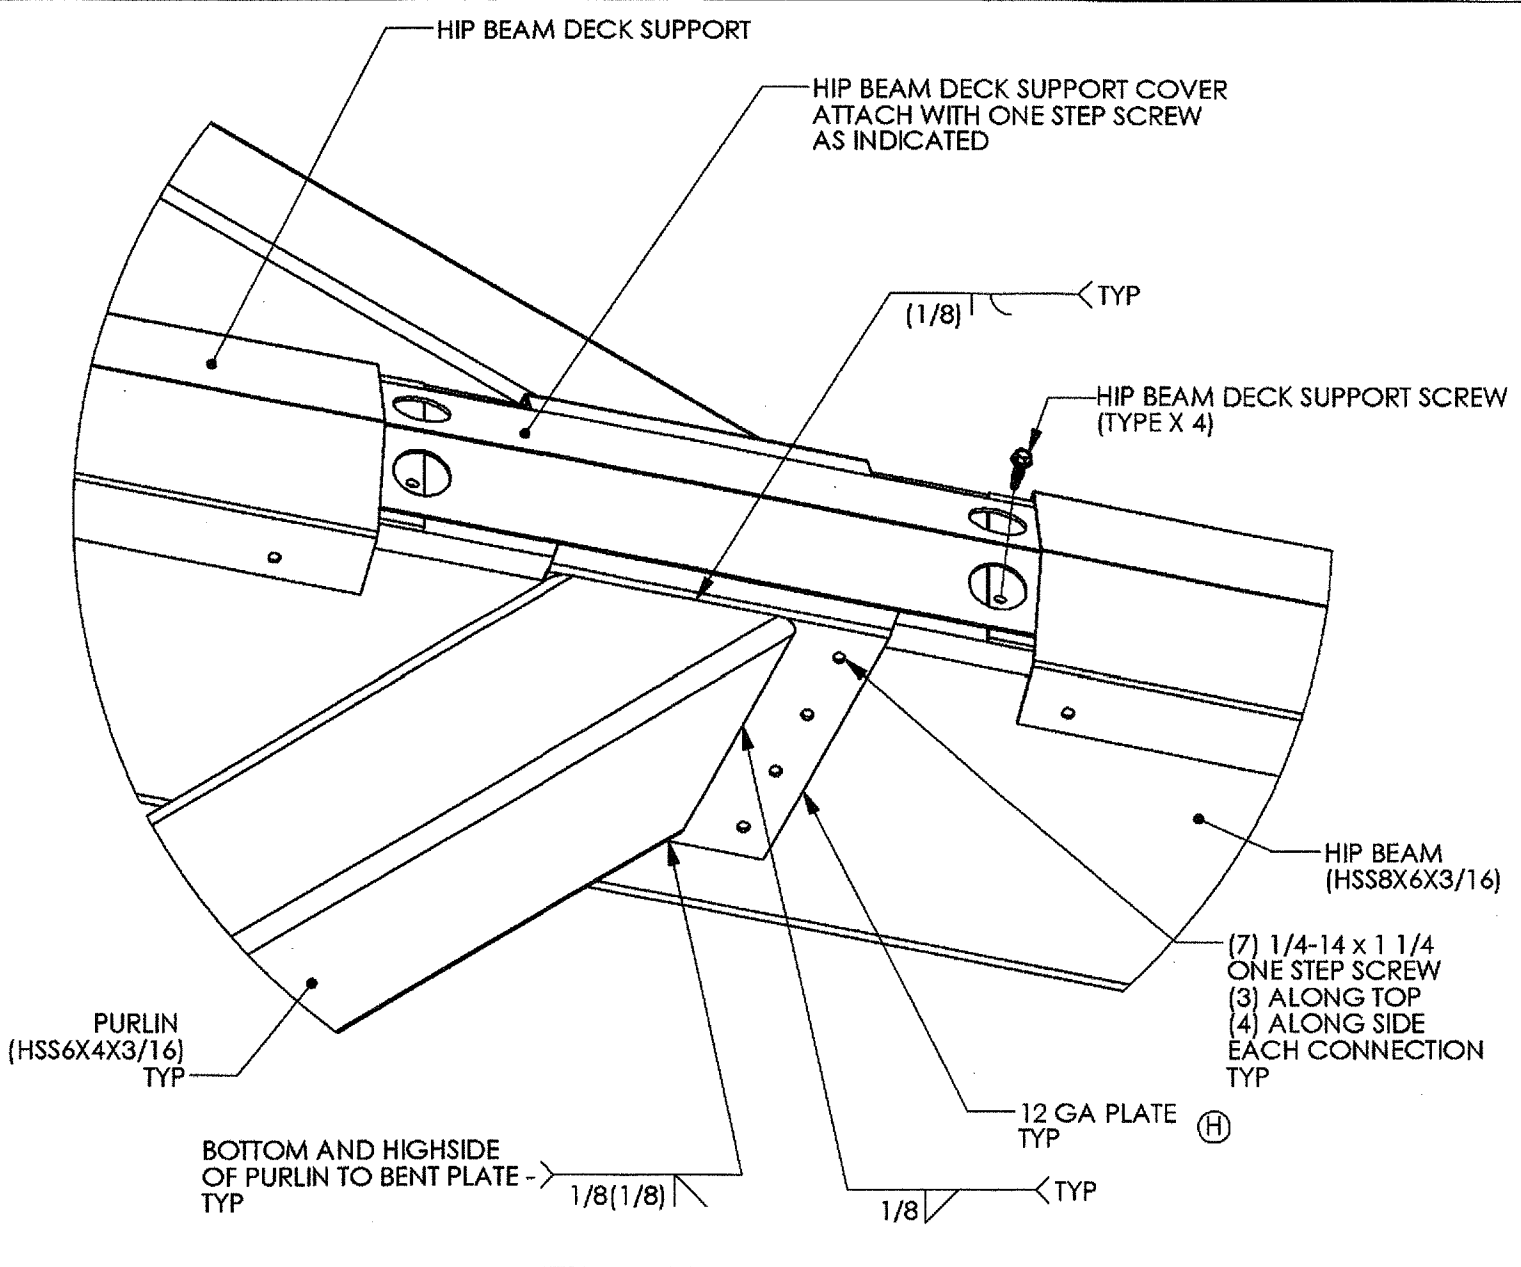


PURLIN CONNECTION @ HIP BEAM

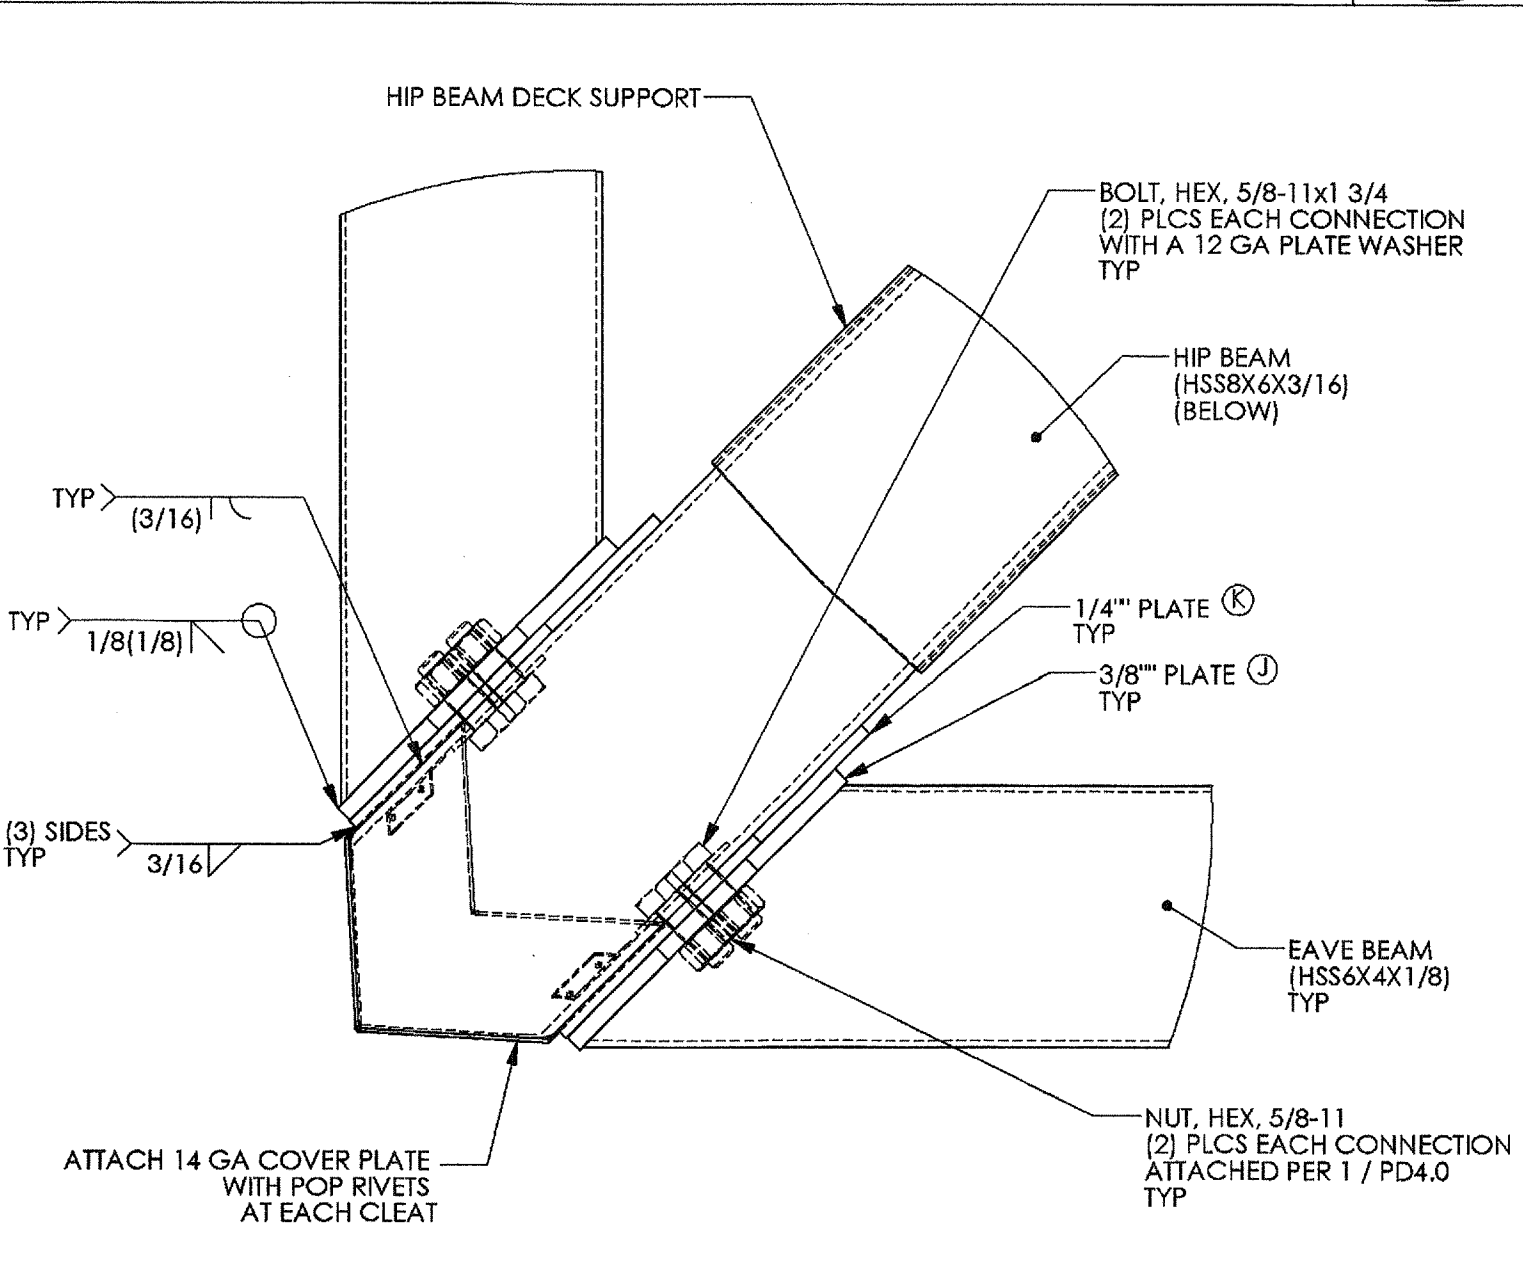


EAVE BEAM CONNECTION @ HIP BEAM

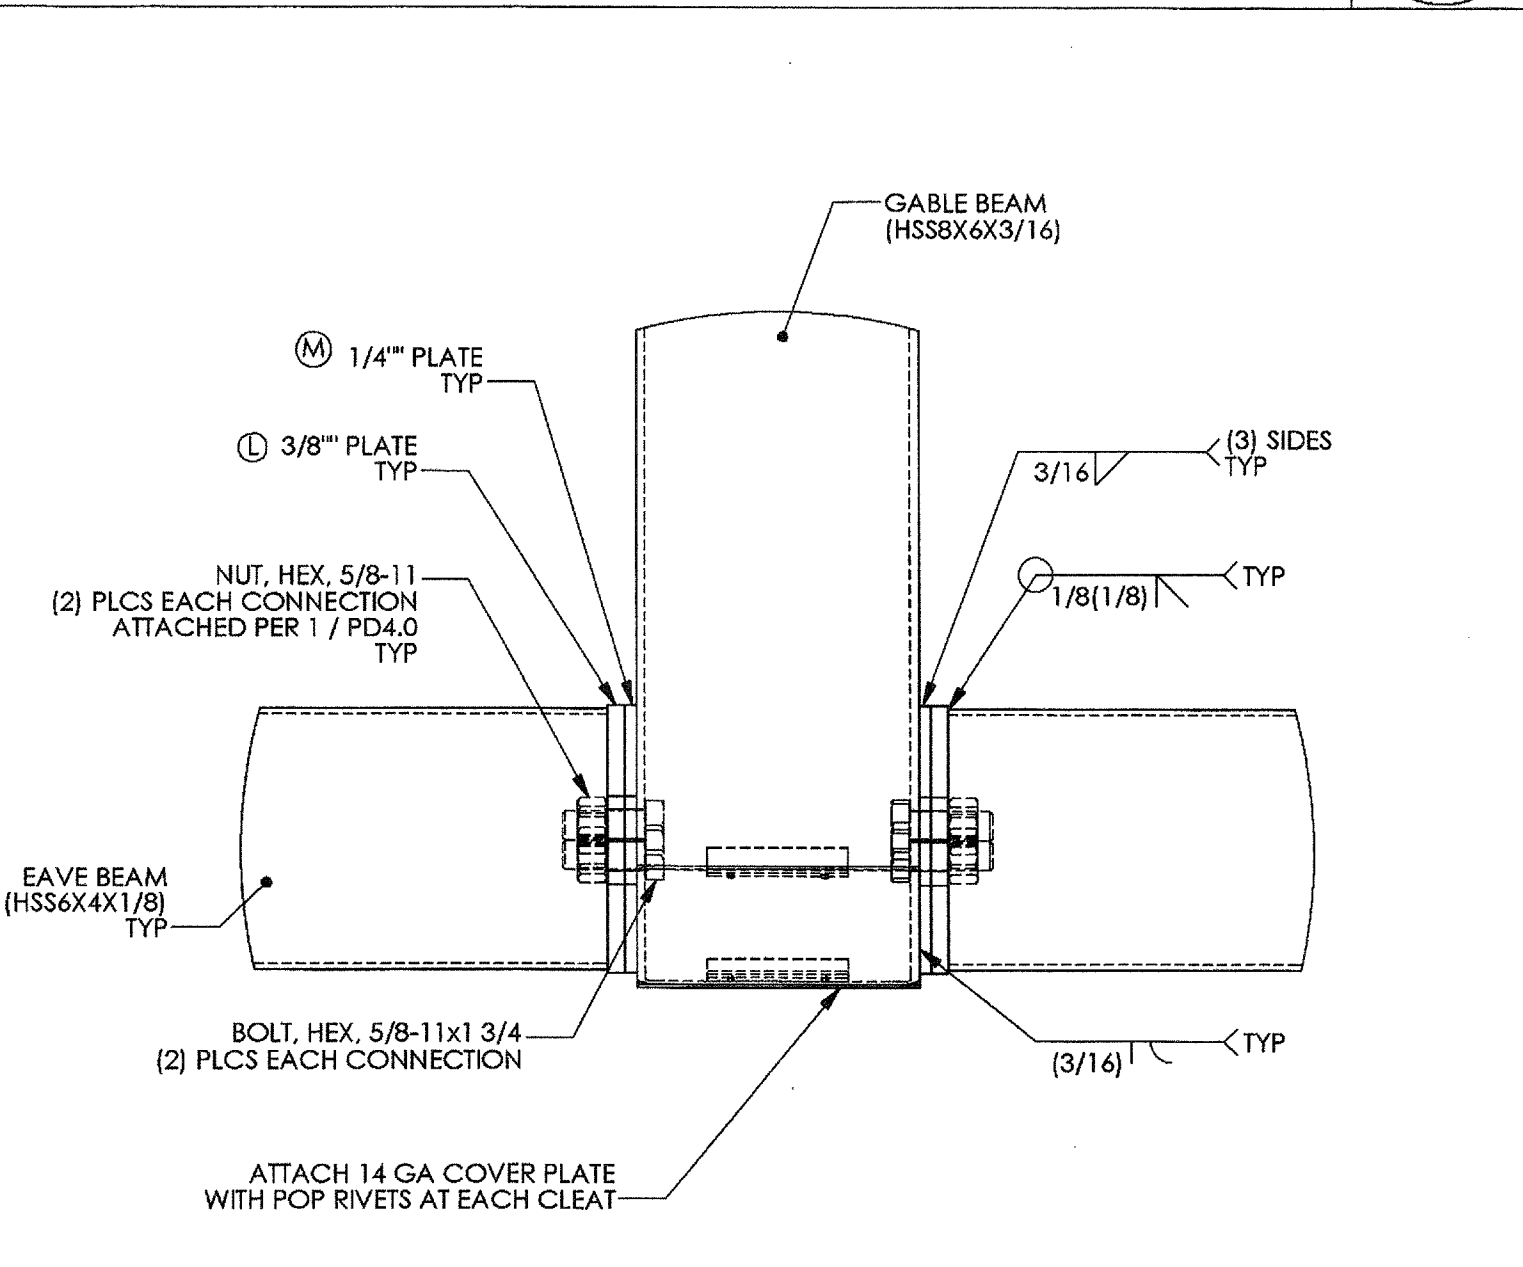

EAVE BEAM CONNECTION @ GABLE BEAM

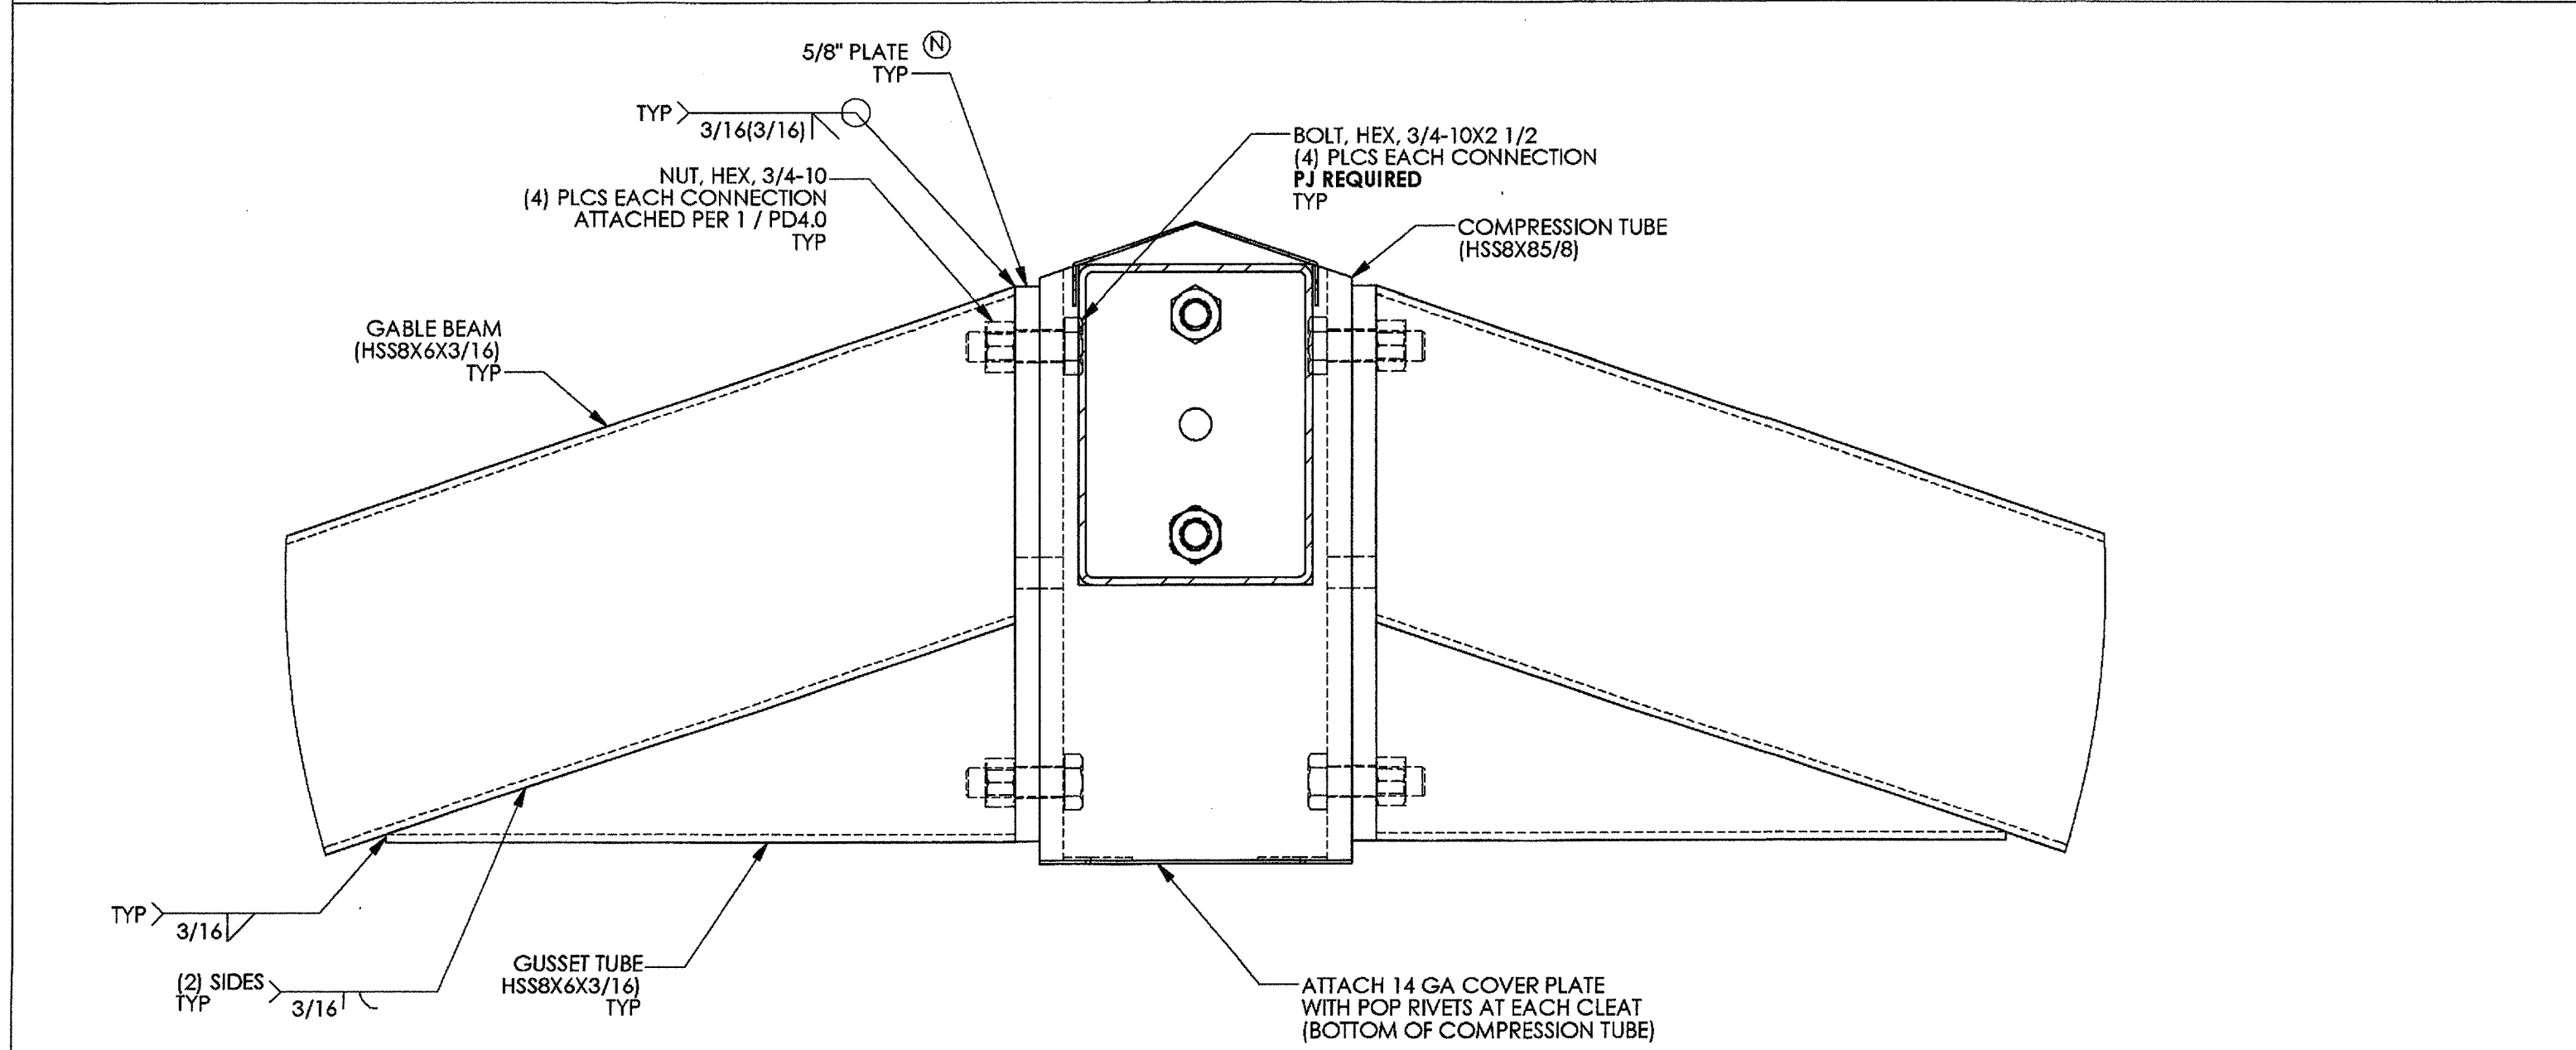

GABLE BEAM CONNECTION @ COMPRESSION TUBE



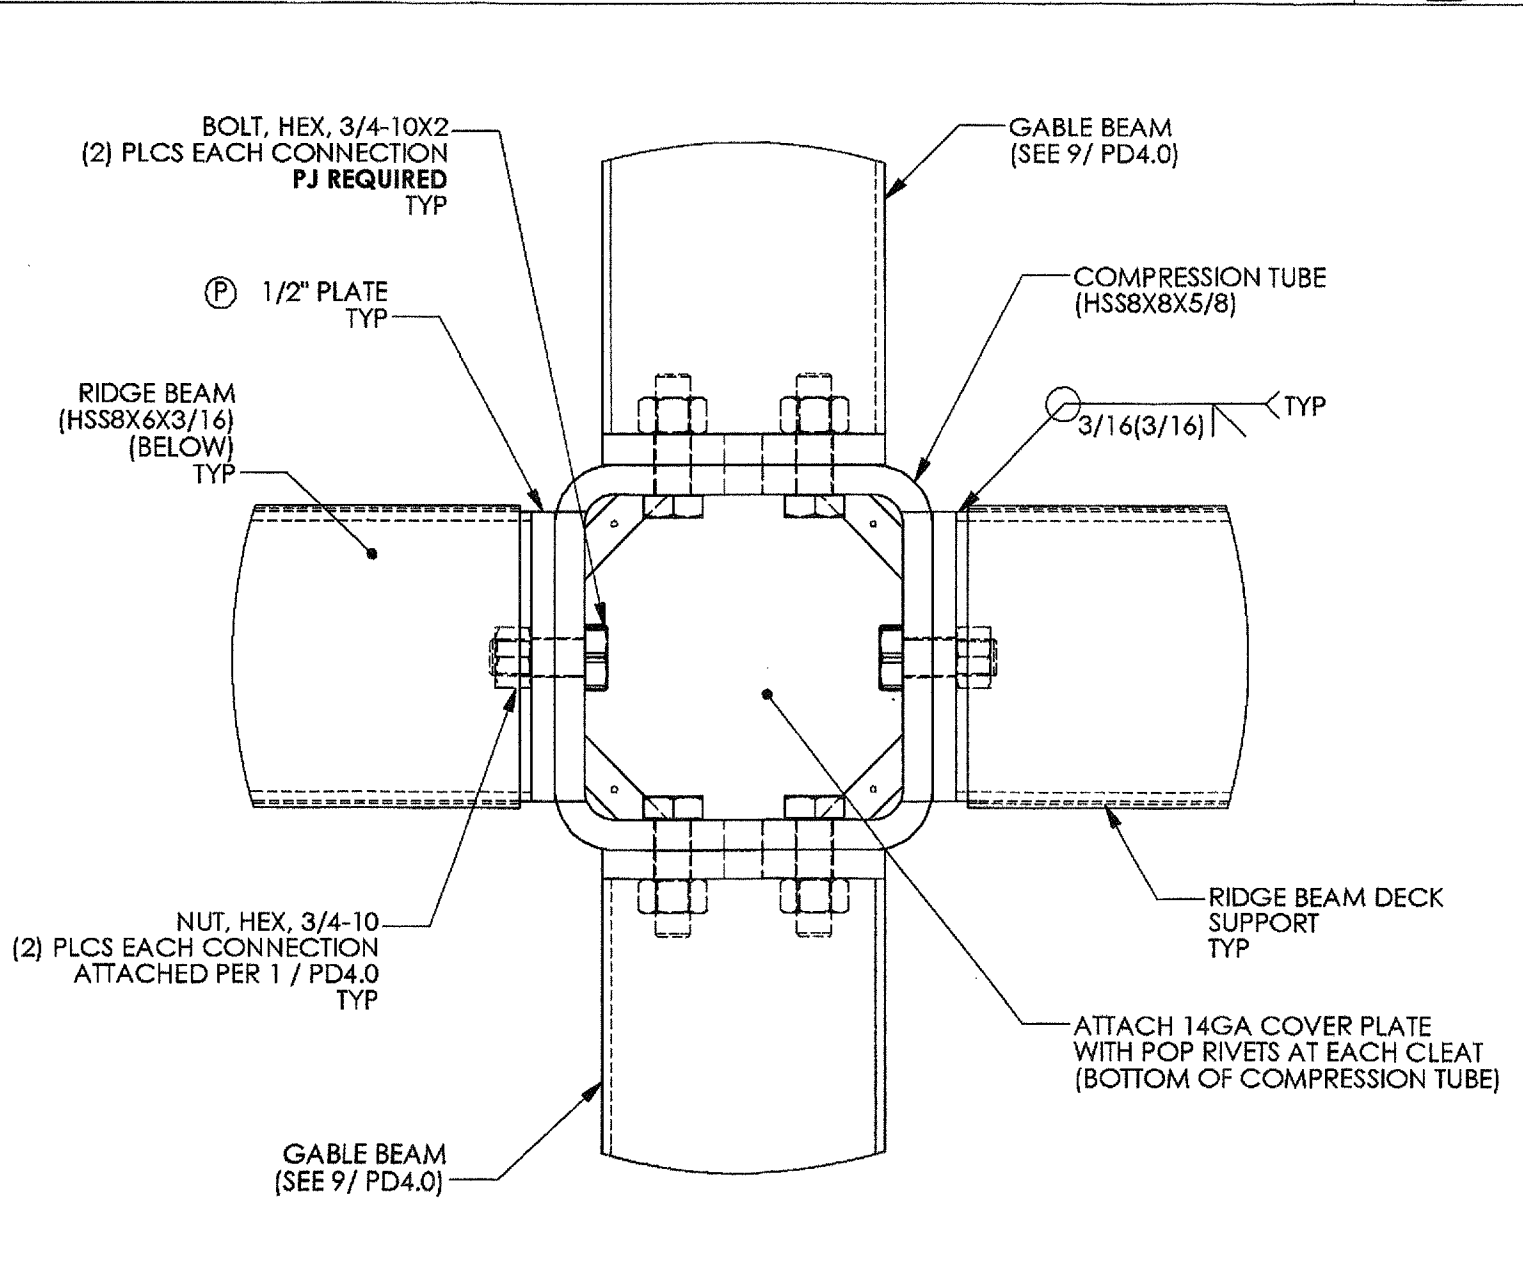


RIDGE BEAM CONNECTION @ COMPRESSION TUBE

FRAME CONNECTION DETAIL NOTES:

- SEE SECTIONS ON SHEET PD5.0.
- SEE PLATE (X) DETAILS ON SHEET PD6.0 AND PD6.1
- COVER ACCESS HOLES WITH GRACE ICE AND WATER SHIELD BEFORE ATTACHING ROOF DECK.



IDENTIFICATION STAMP
DIV. OF THE STATE ARCHITECT
03 118709
AC WFLS
Date JAN 17 2018

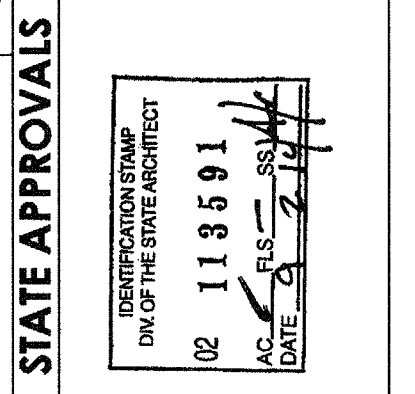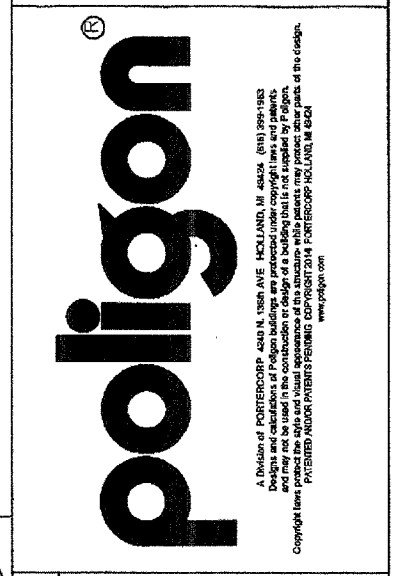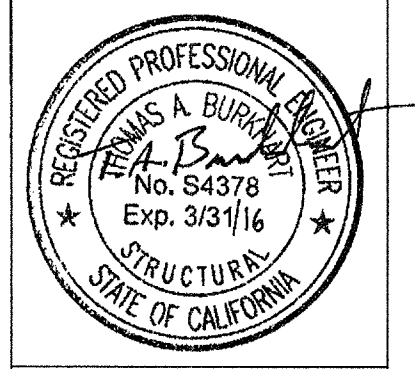

PRE-CHECK (PC) DOCUMENT
CODE: 2013 CBC
A SEPARATE PROJECT APPLICATION FOR CONSTRUCTION IS REQUIRED.

FRAME CONNECTION DETAILS
RAM 20
HIP ROOF (RAM)
PC DRAWINGS



PD4.0
DRAWN BY: JMD
CHECKED BY: CE
POLYGON # 51458

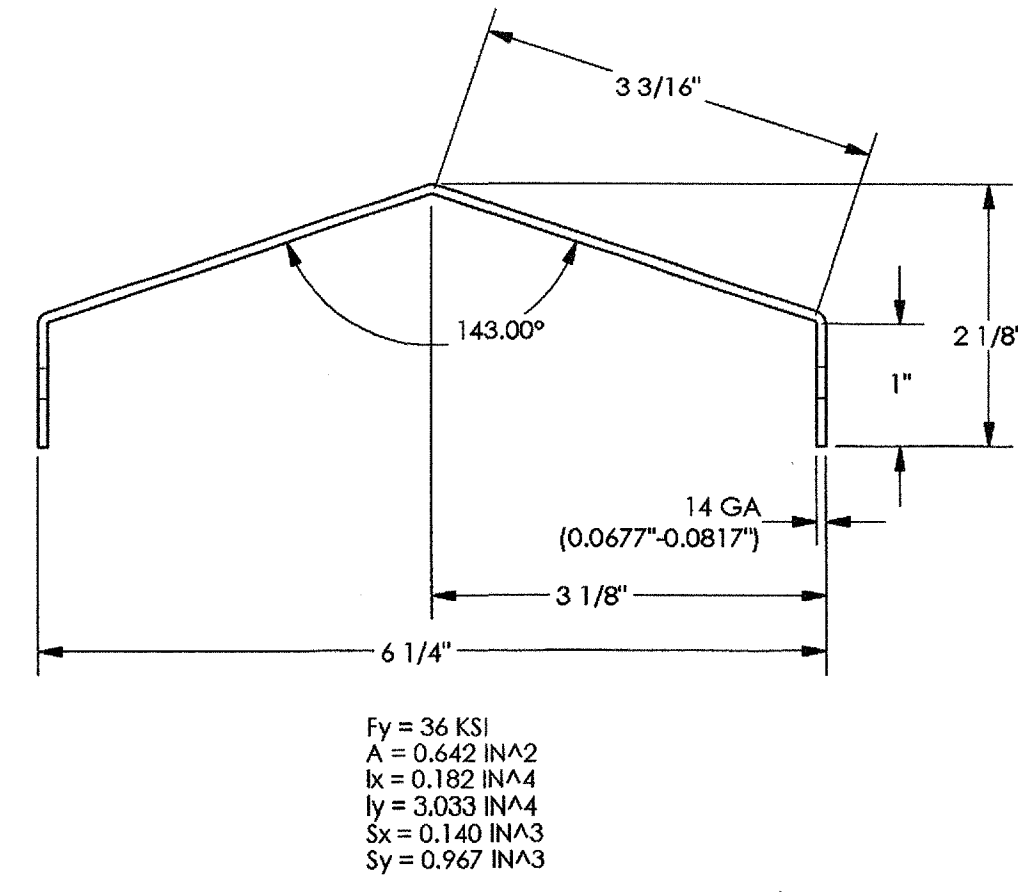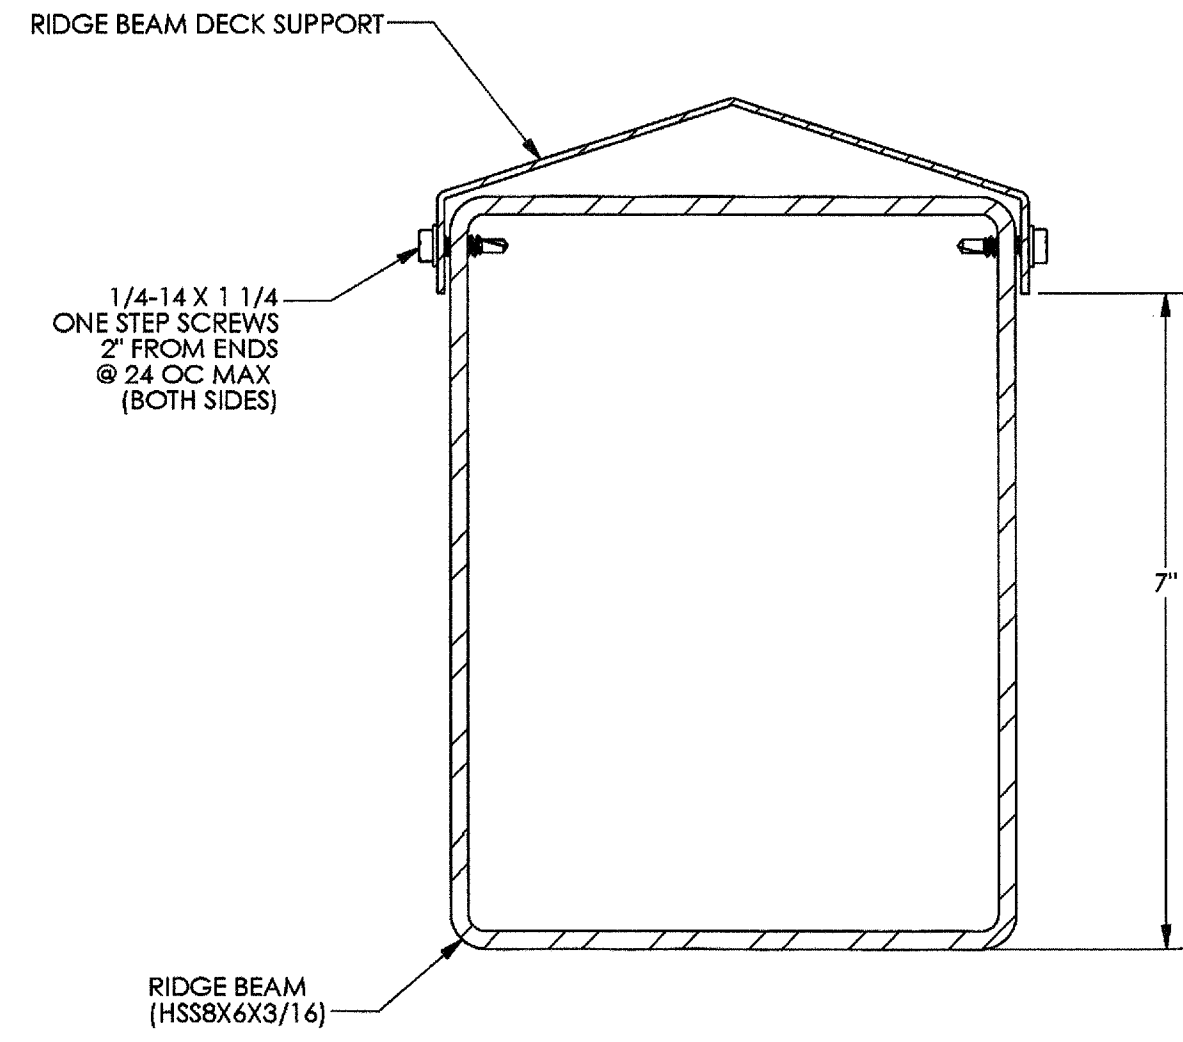

Fy = 36 KSI
 A = 0.642 IN²
 Ix = 0.182 IN⁴
 Iy = 3.033 IN⁴
 Sx = 0.140 IN³
 Sy = 0.967 IN³

RIDGE BEAM DECK SUPPORT





A

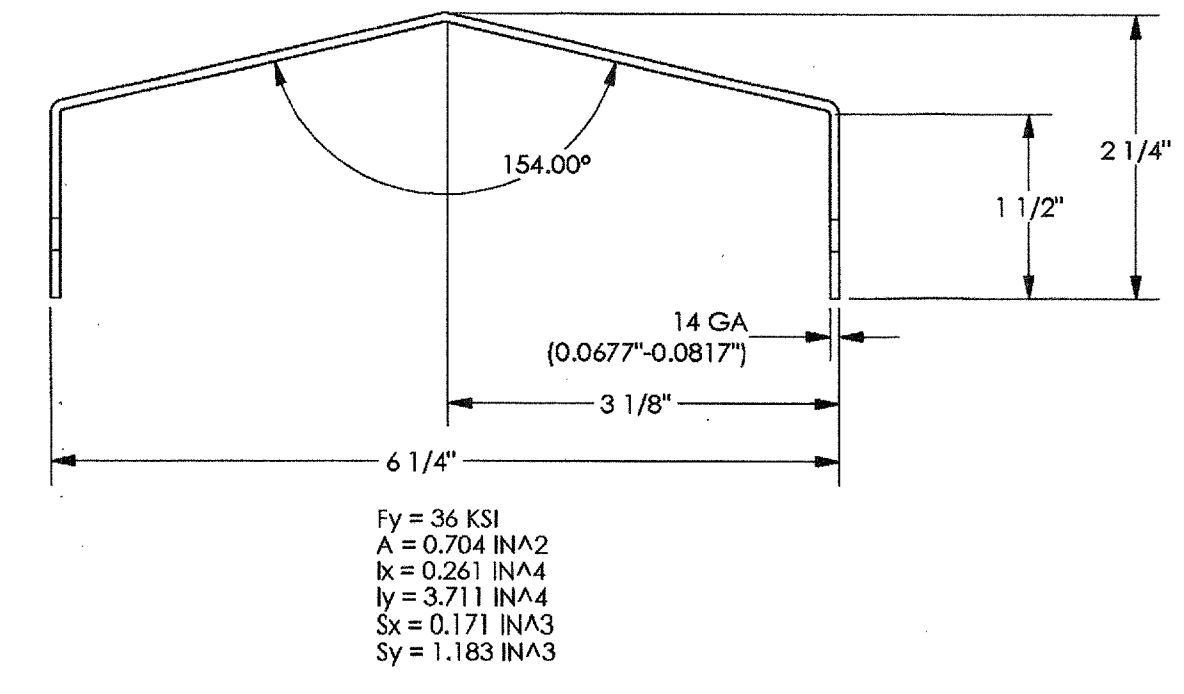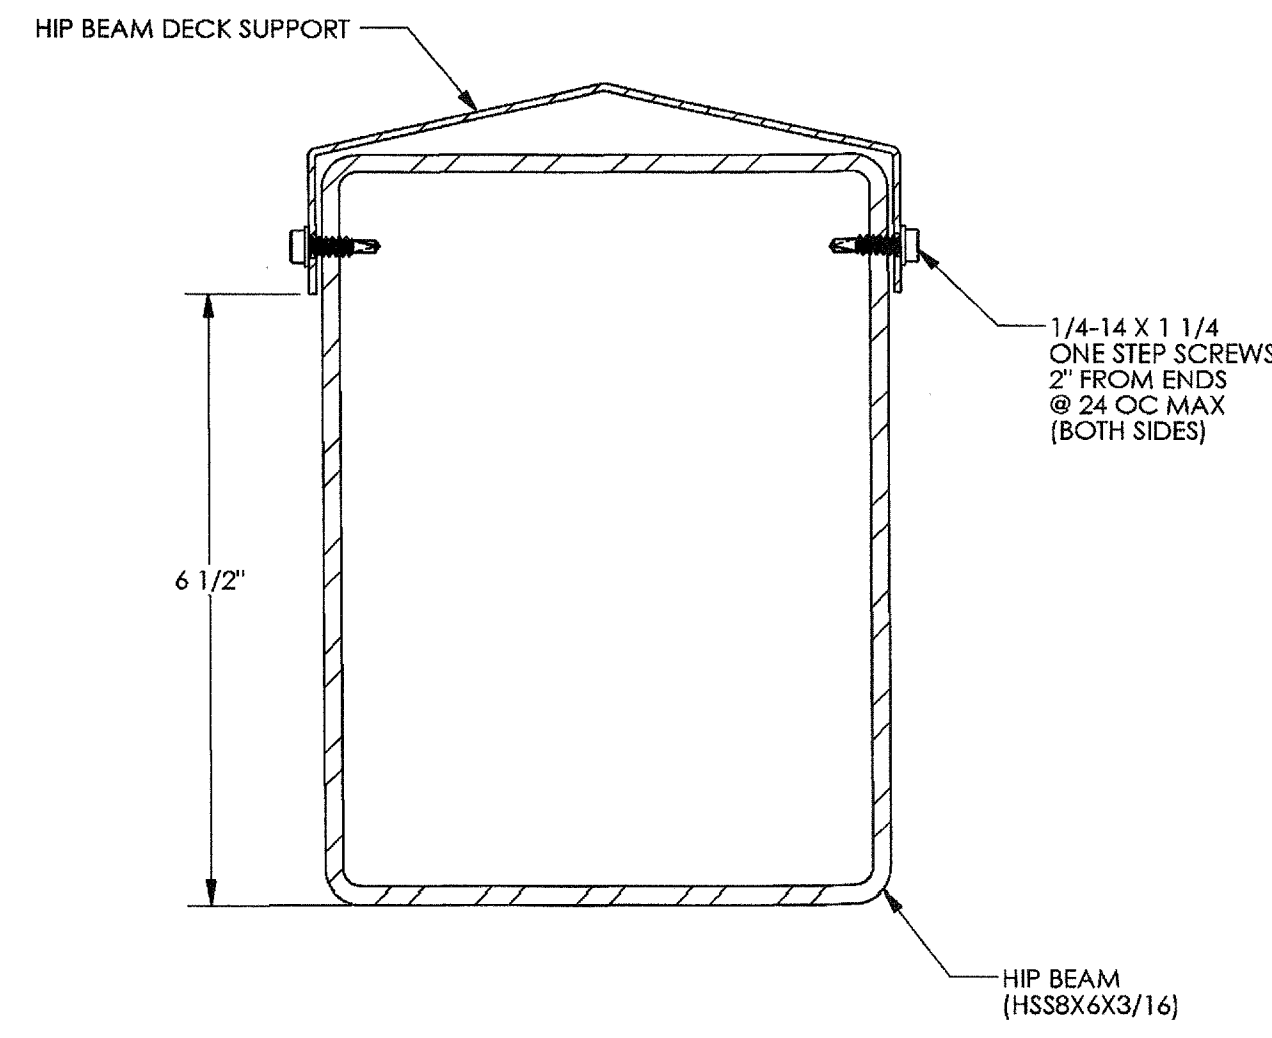

Fy = 36 KSI
 A = 0.704 IN²
 Ix = 0.261 IN⁴
 Iy = 3.711 IN⁴
 Sx = 0.171 IN³
 Sy = 1.183 IN³

HIP BEAM DECK SUPPORT

B

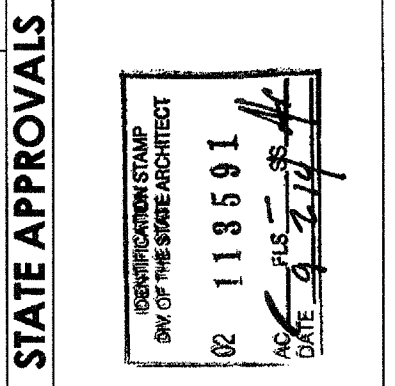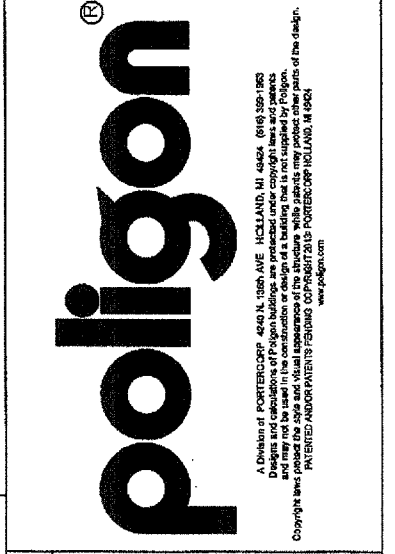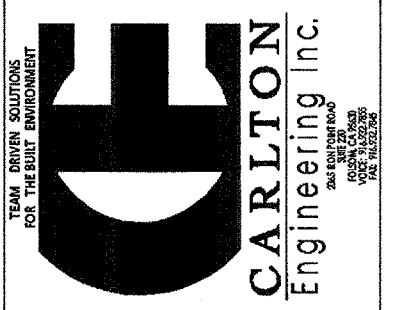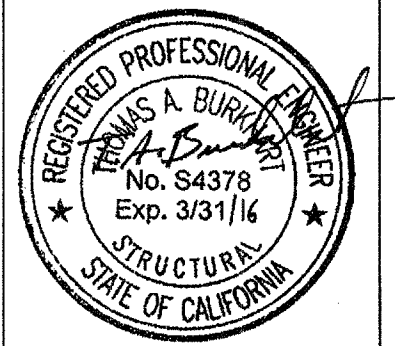

PRE-CHECK (PC) DOCUMENT

CODE: 2013 CBC
 A SEPARATE PROJECT APPLICATION FOR CONSTRUCTION IS REQUIRED.


SECTION DETAILS

RAM 20
 HIP ROOF (RAM)
 PC DRAWINGS

DRAWN BY: JMD
 CHECKED BY: CE
 POLYGON #: 51458


PD5.0

IDENTIFICATION STAMP
 DIV. OF THE STATE ARCHITECT
 N U3 118709
 ACKN FLS [Signature]
 Date: JAN 17 2018

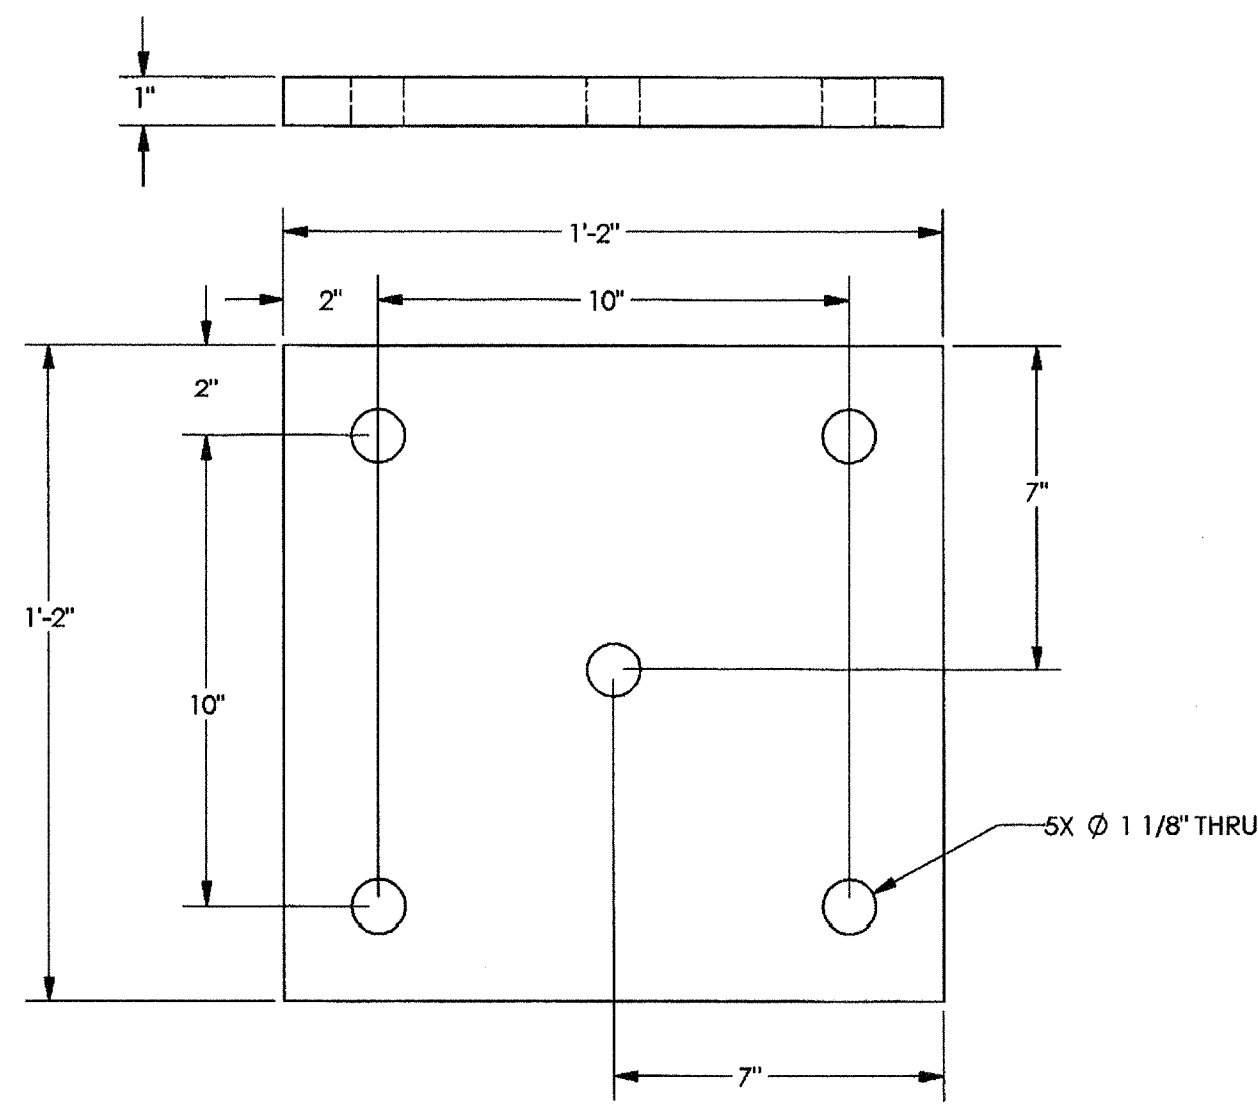


PLATE

A

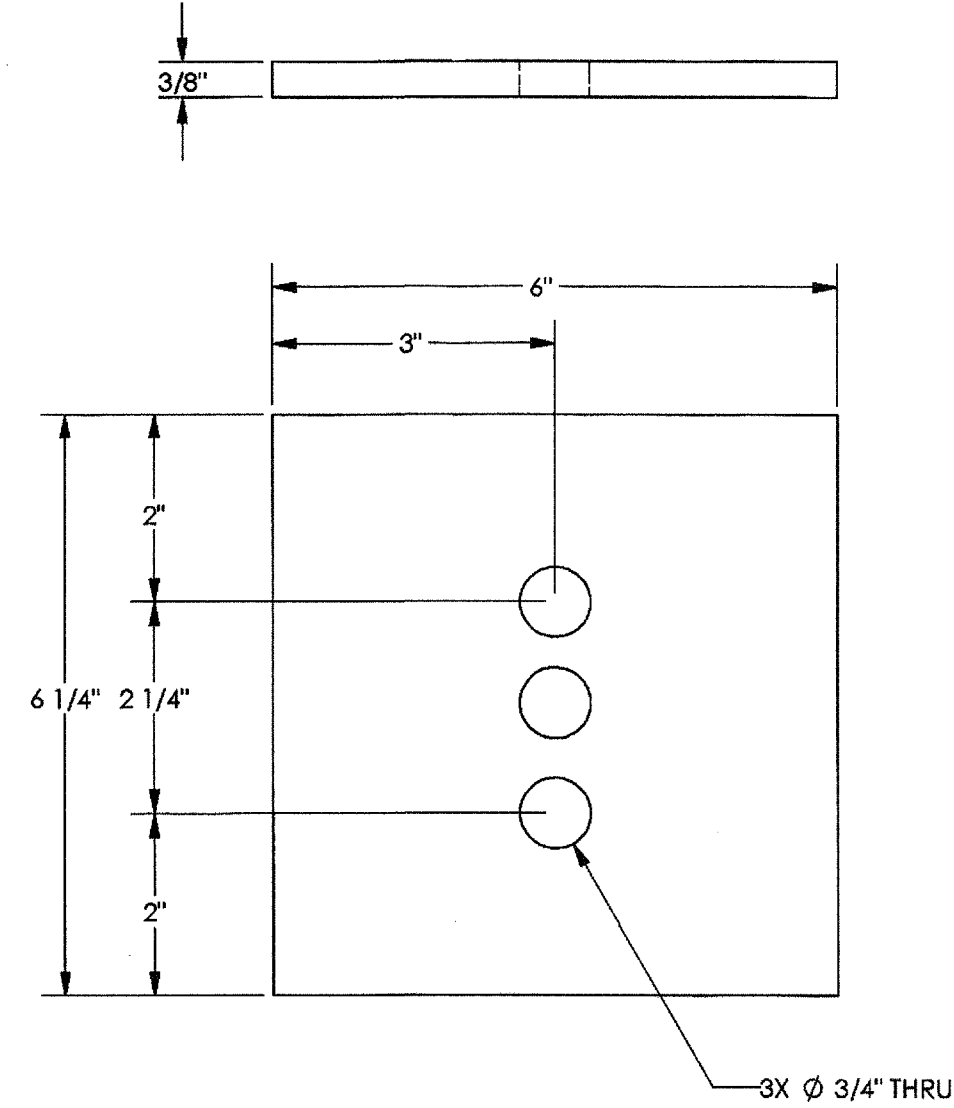


PLATE

B

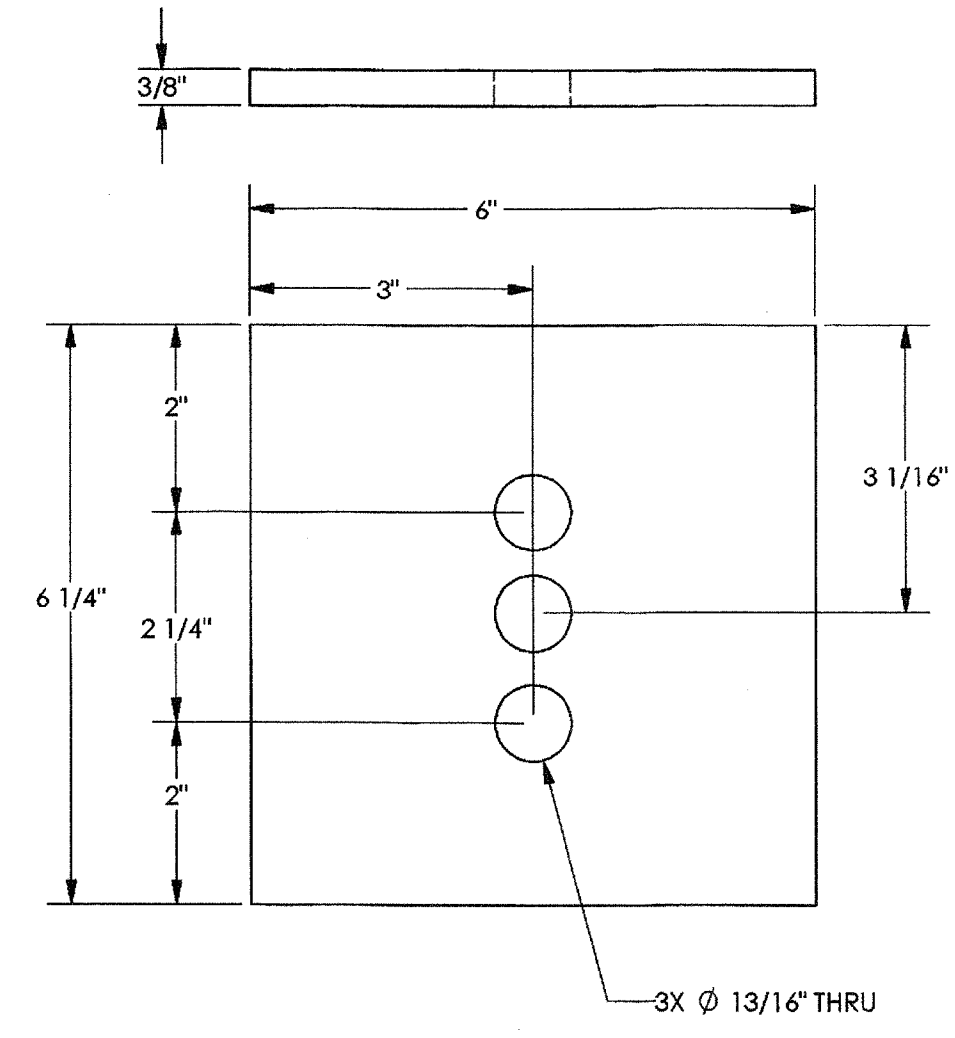


PLATE

C

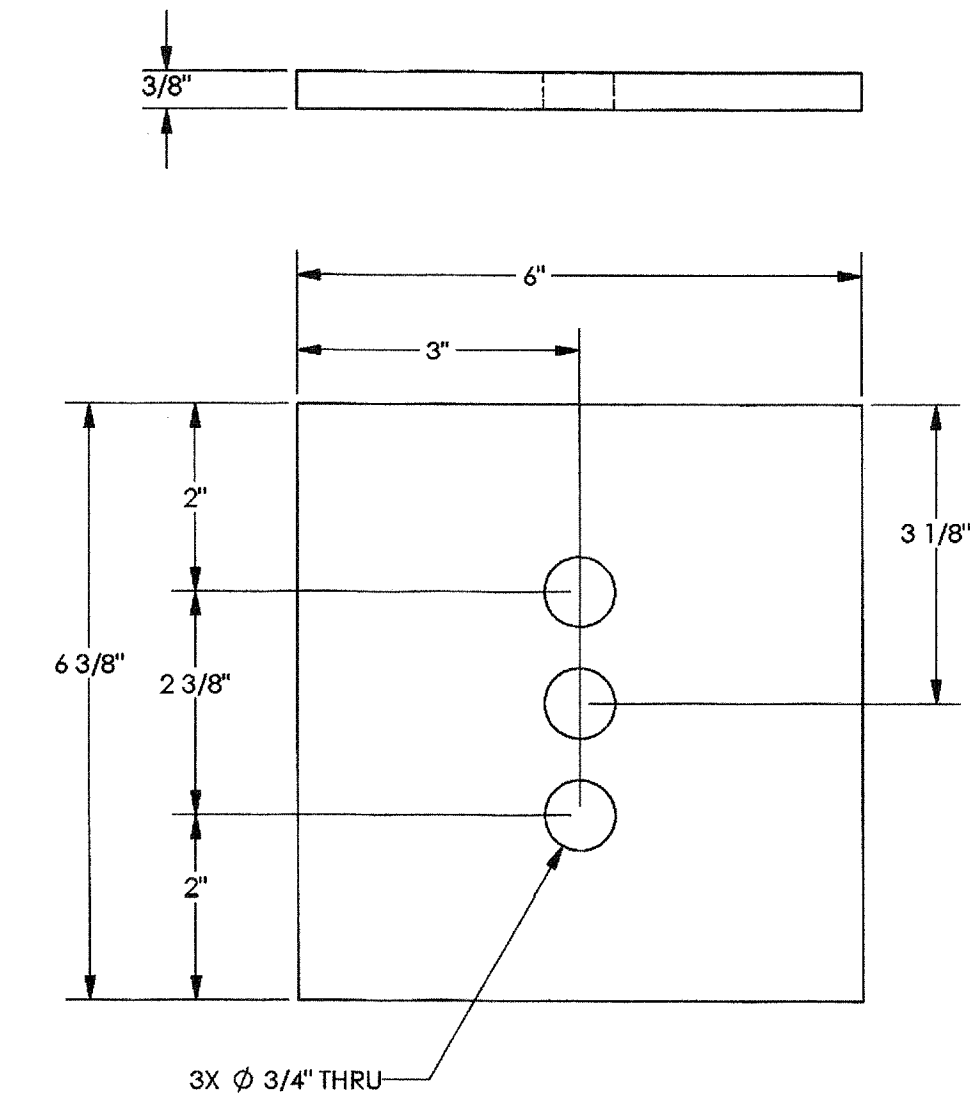


PLATE

D

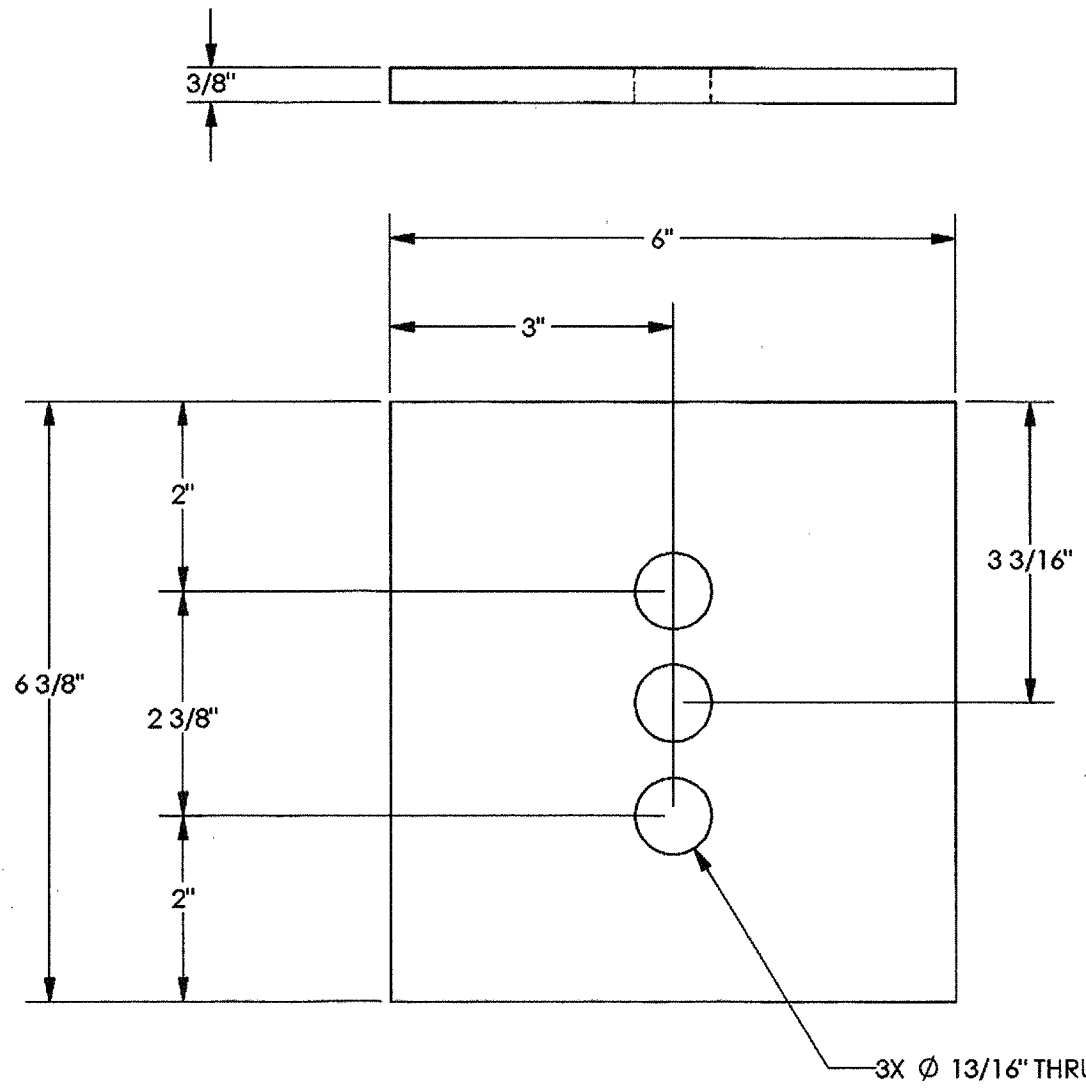


PLATE

E

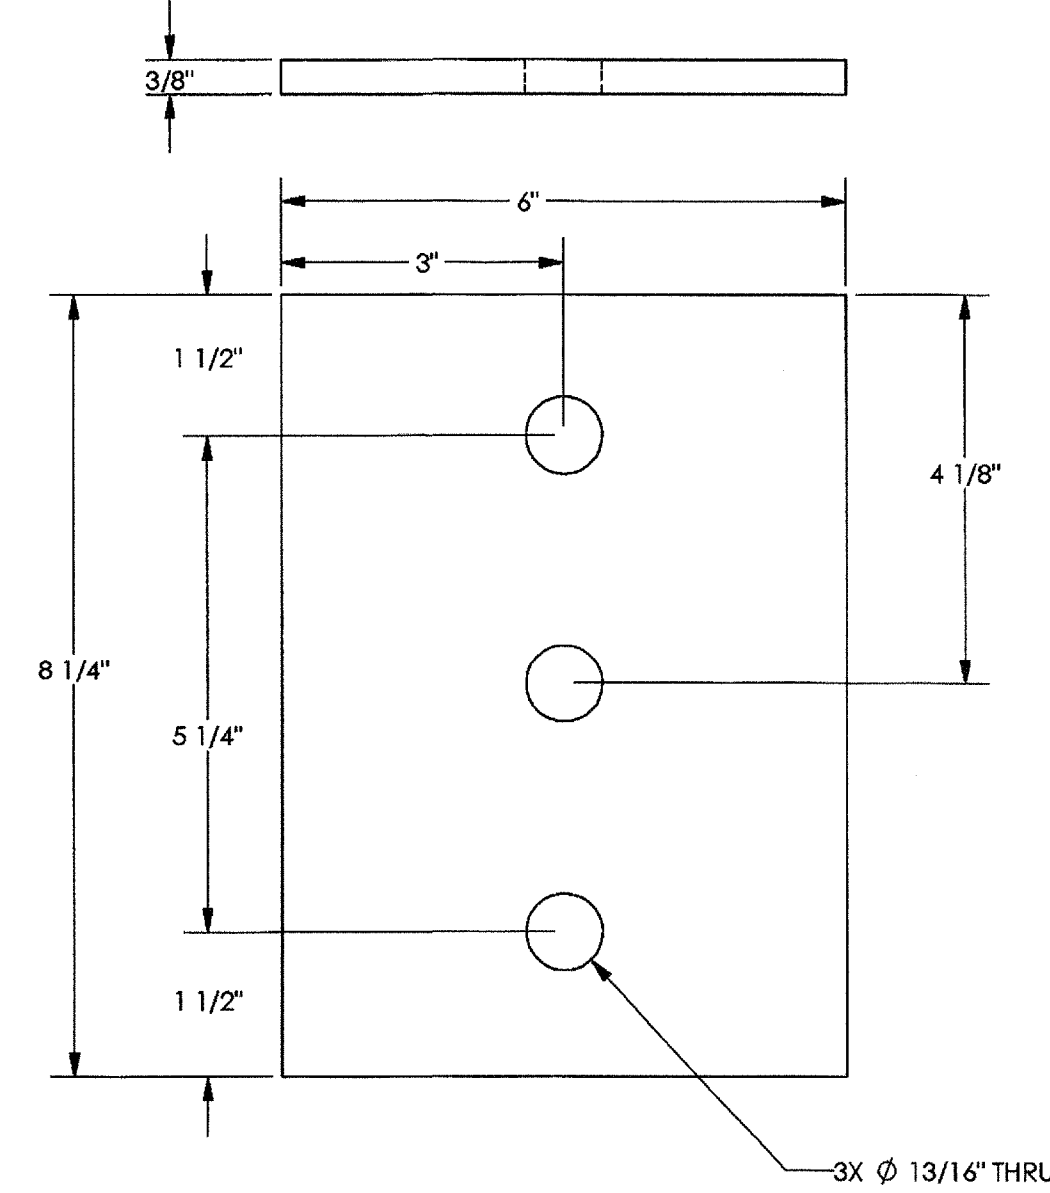


PLATE

F

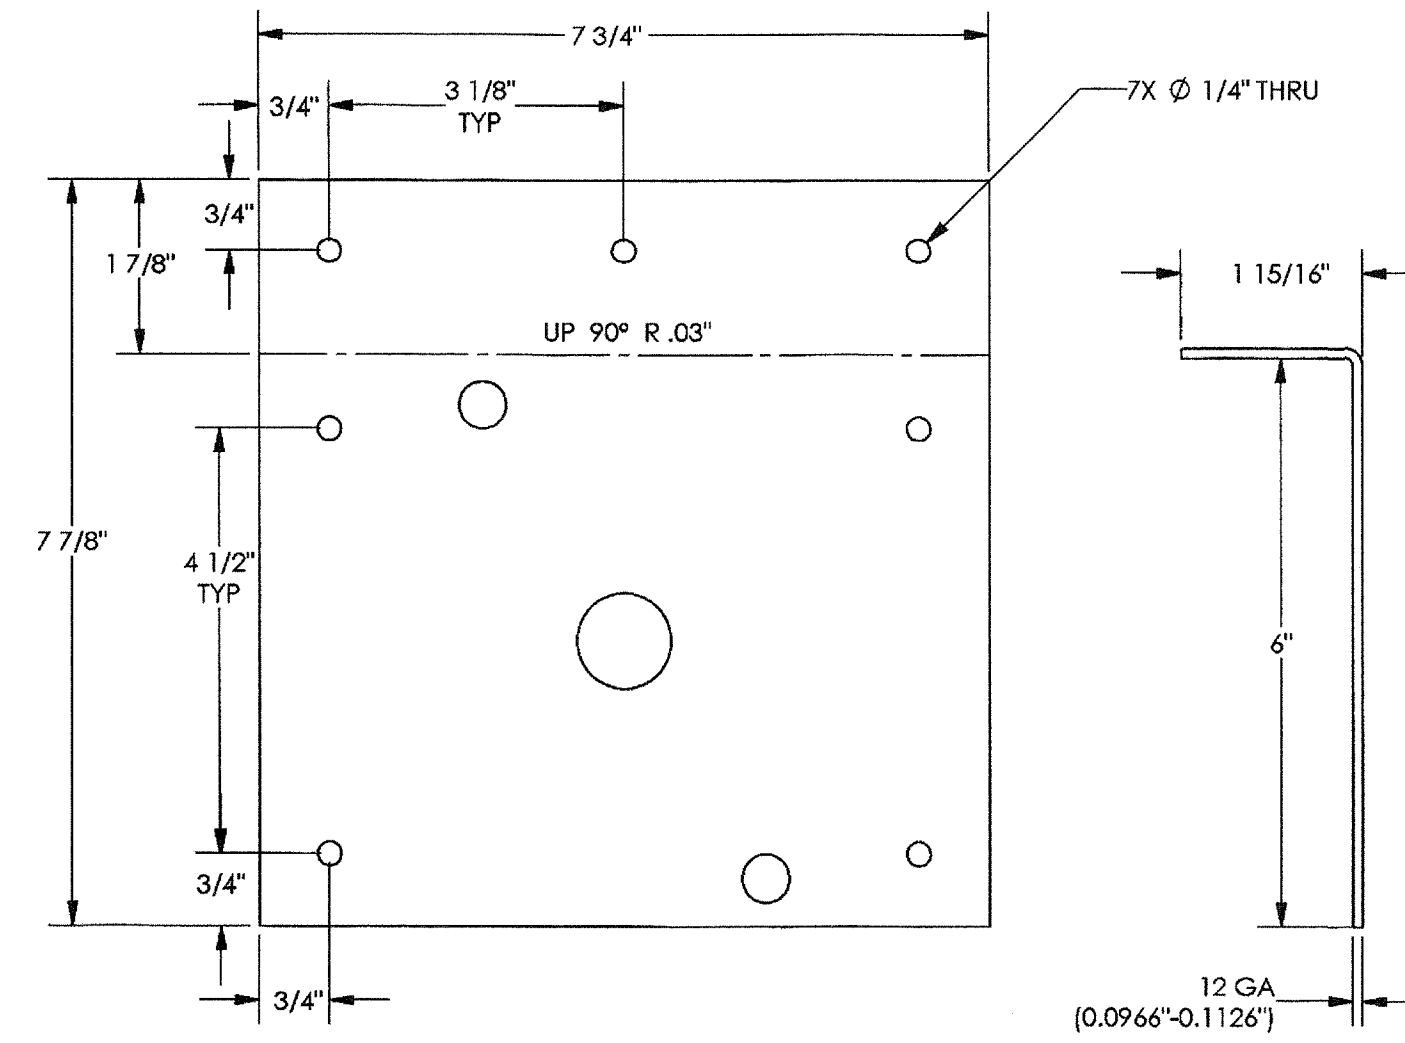


PLATE

G

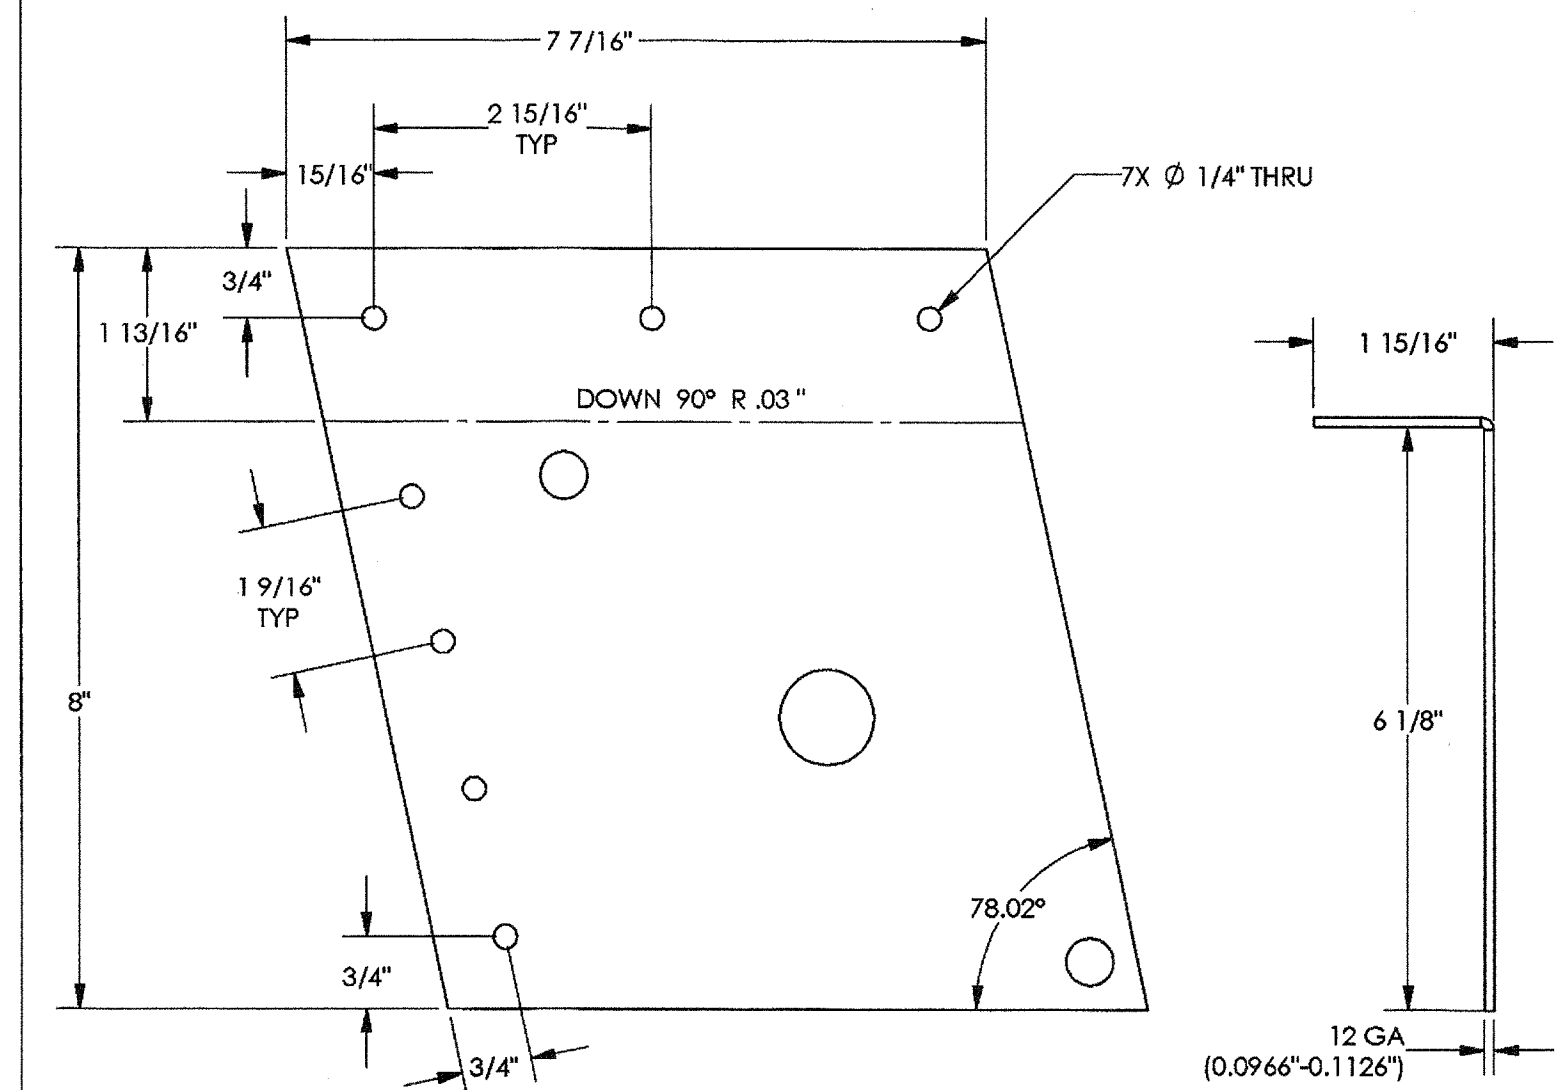


PLATE

H

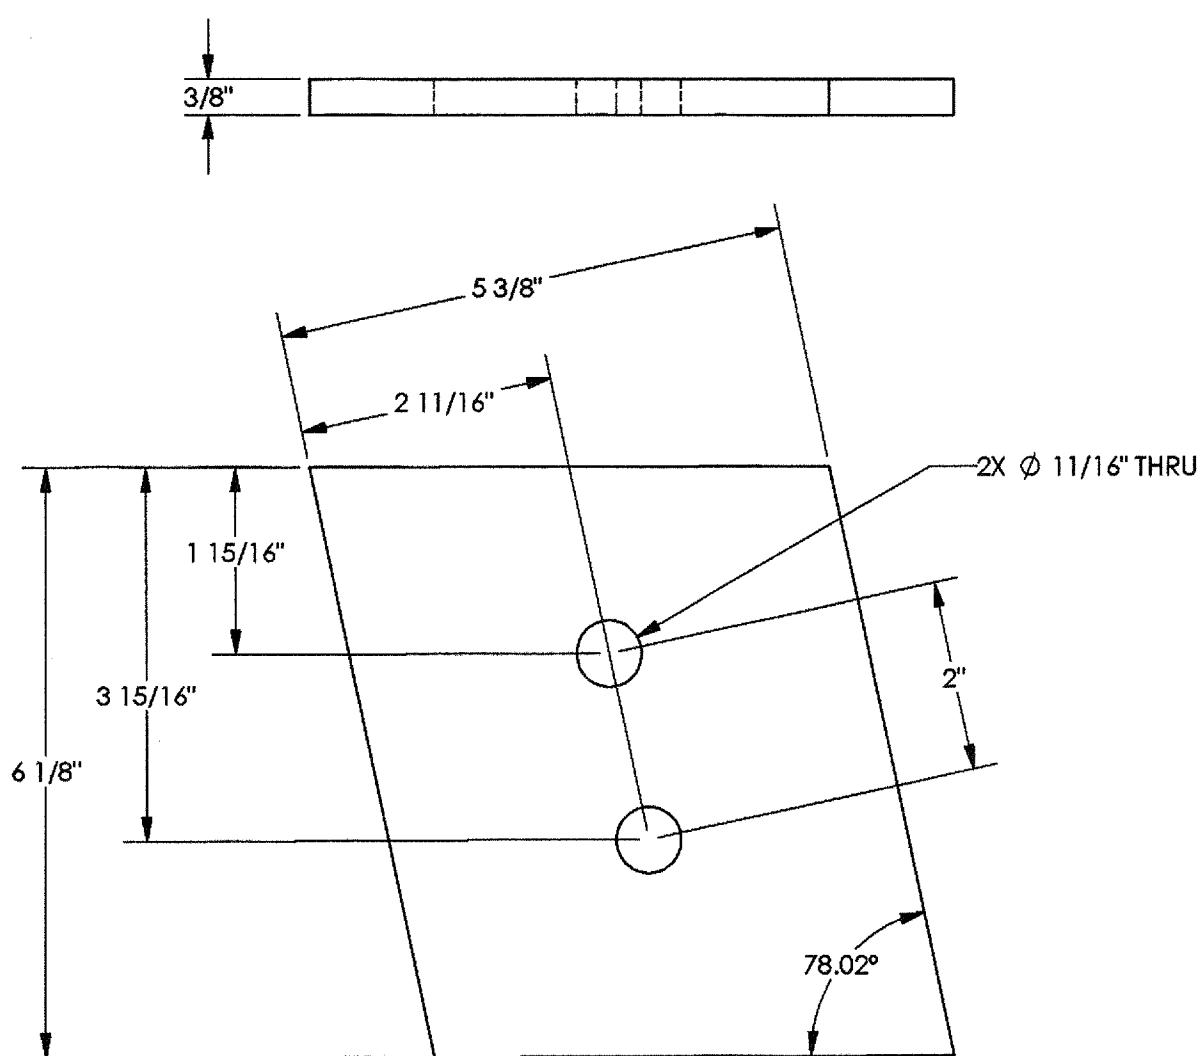


PLATE

J

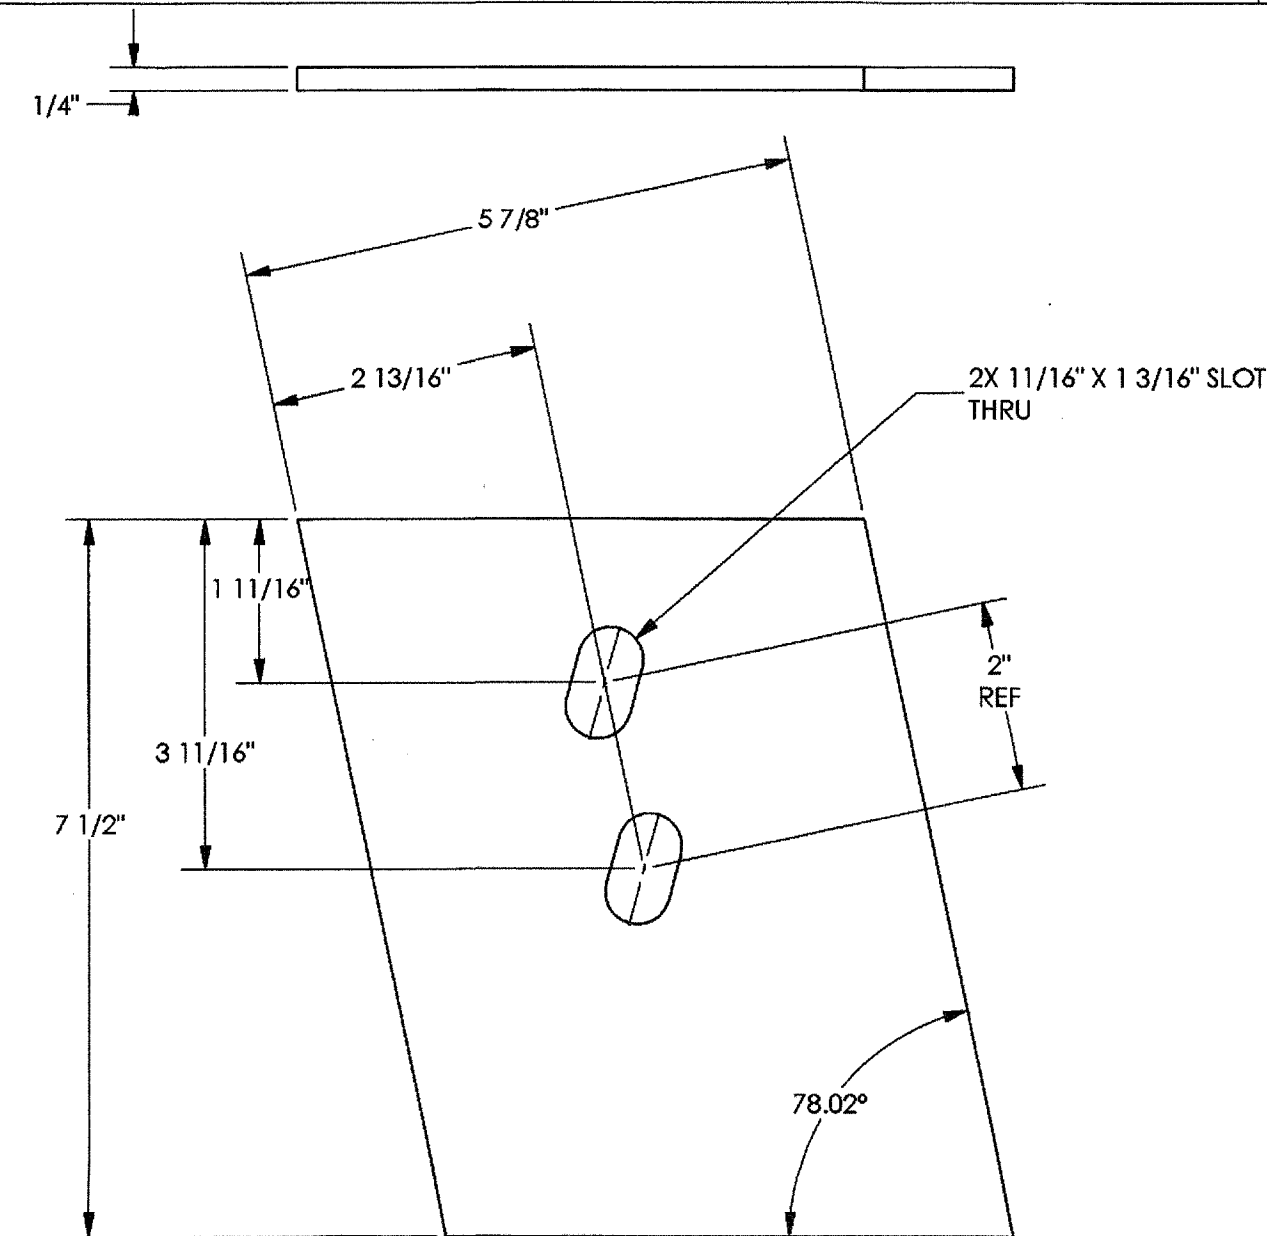


PLATE

K

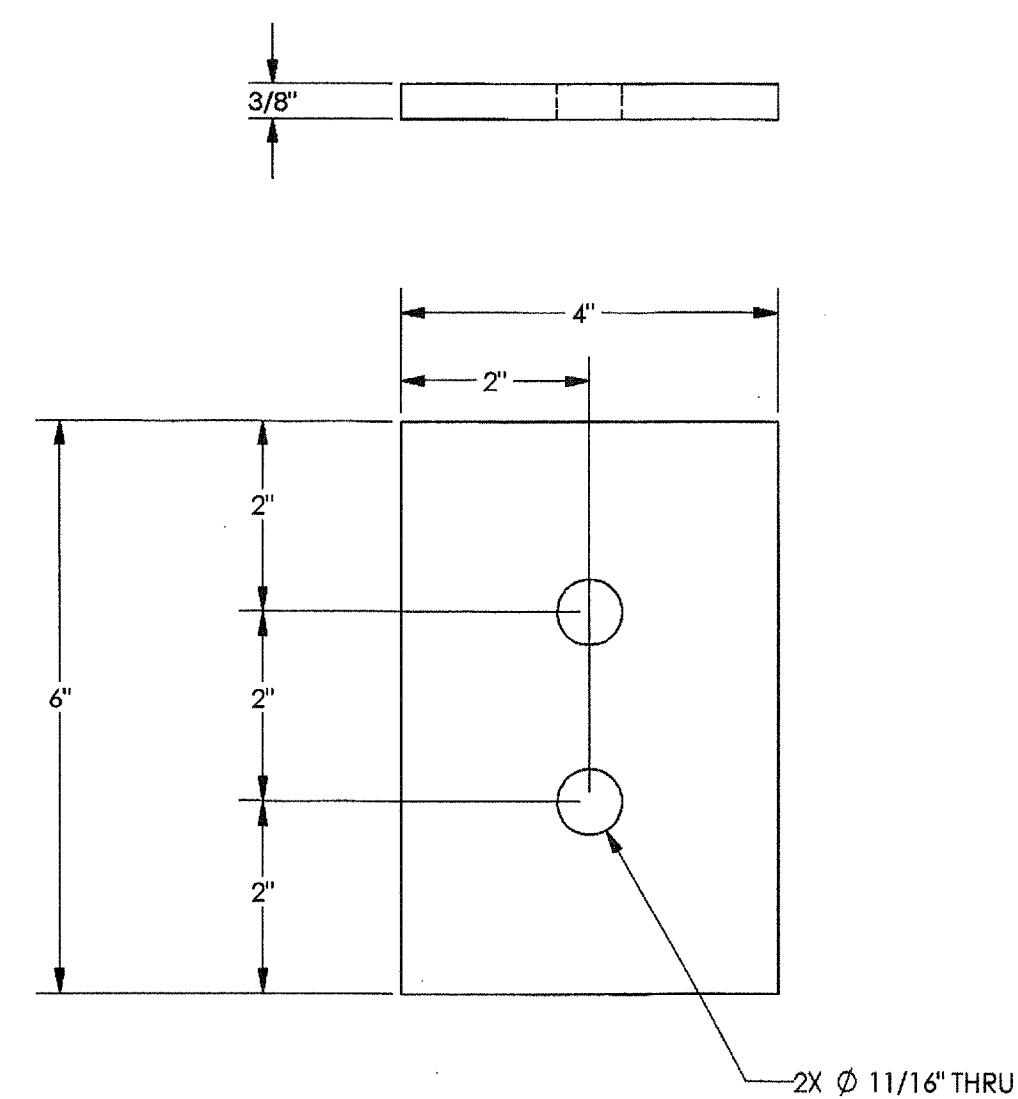

PLATE




L

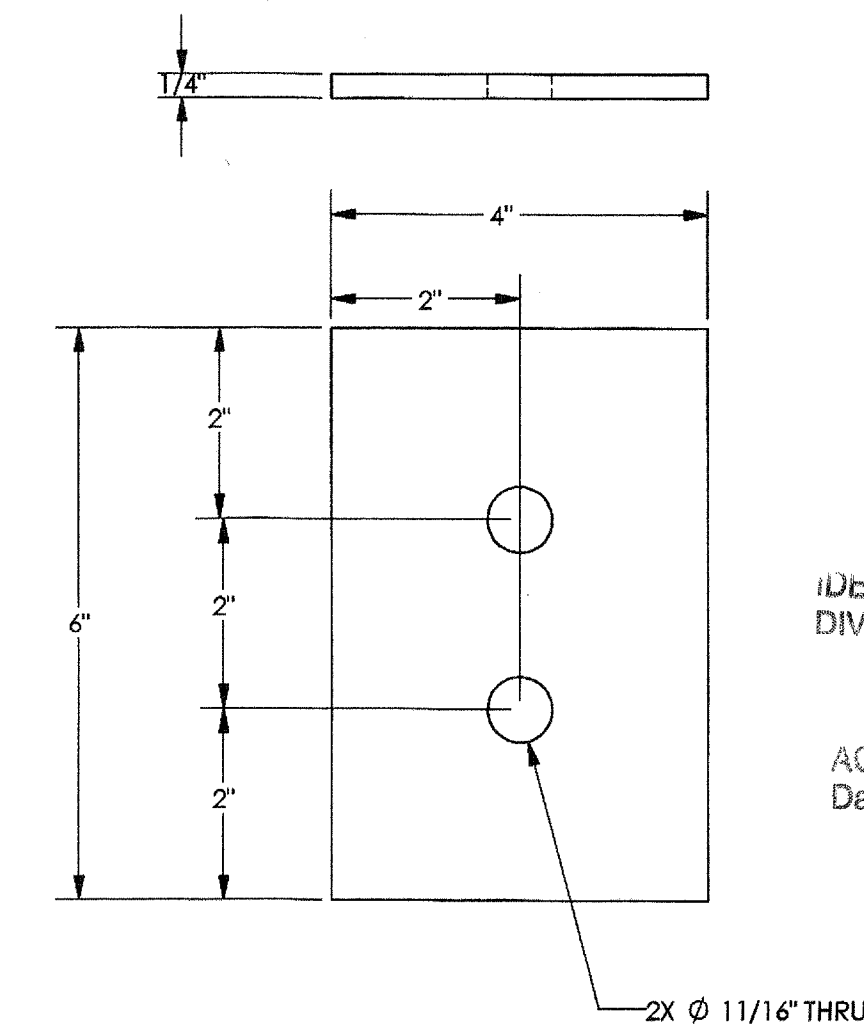

PLATE

M

IDENTIFICATION STAMP
 DIV. OF THE STATE ARCHITECT
 N 03 118709
 ACW FLS M SS
 Date JAN 17 2018

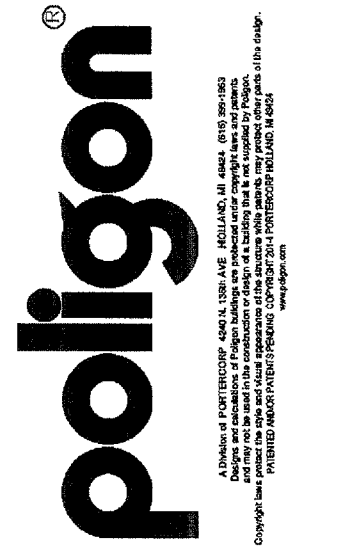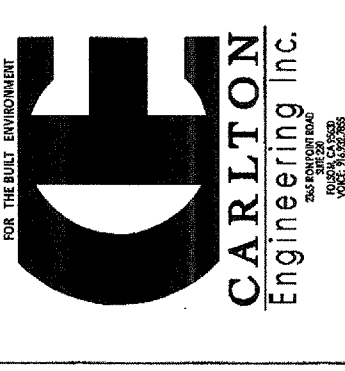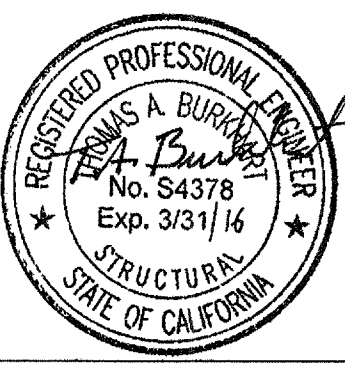


STATE APPROVALS
 IDENTIFICATION STAMP
 DIV. OF THE STATE ARCHITECT
 02 118591
 ACW FLS M SS
 Date 3-17-18


PRE-CHECK (PC) DOCUMENT
 CODE: 2013 CBC
 A SEPARATE PROJECT APPLICATION FOR CONSTRUCTION IS REQUIRED.

PLATE DETAILS
 RAM 20
 HIP ROOF (RAM)
 PC DRAWINGS
 DRAWN BY: JMD
 CHECKED BY: CE
 POLYGON #: 51458


PD6.0

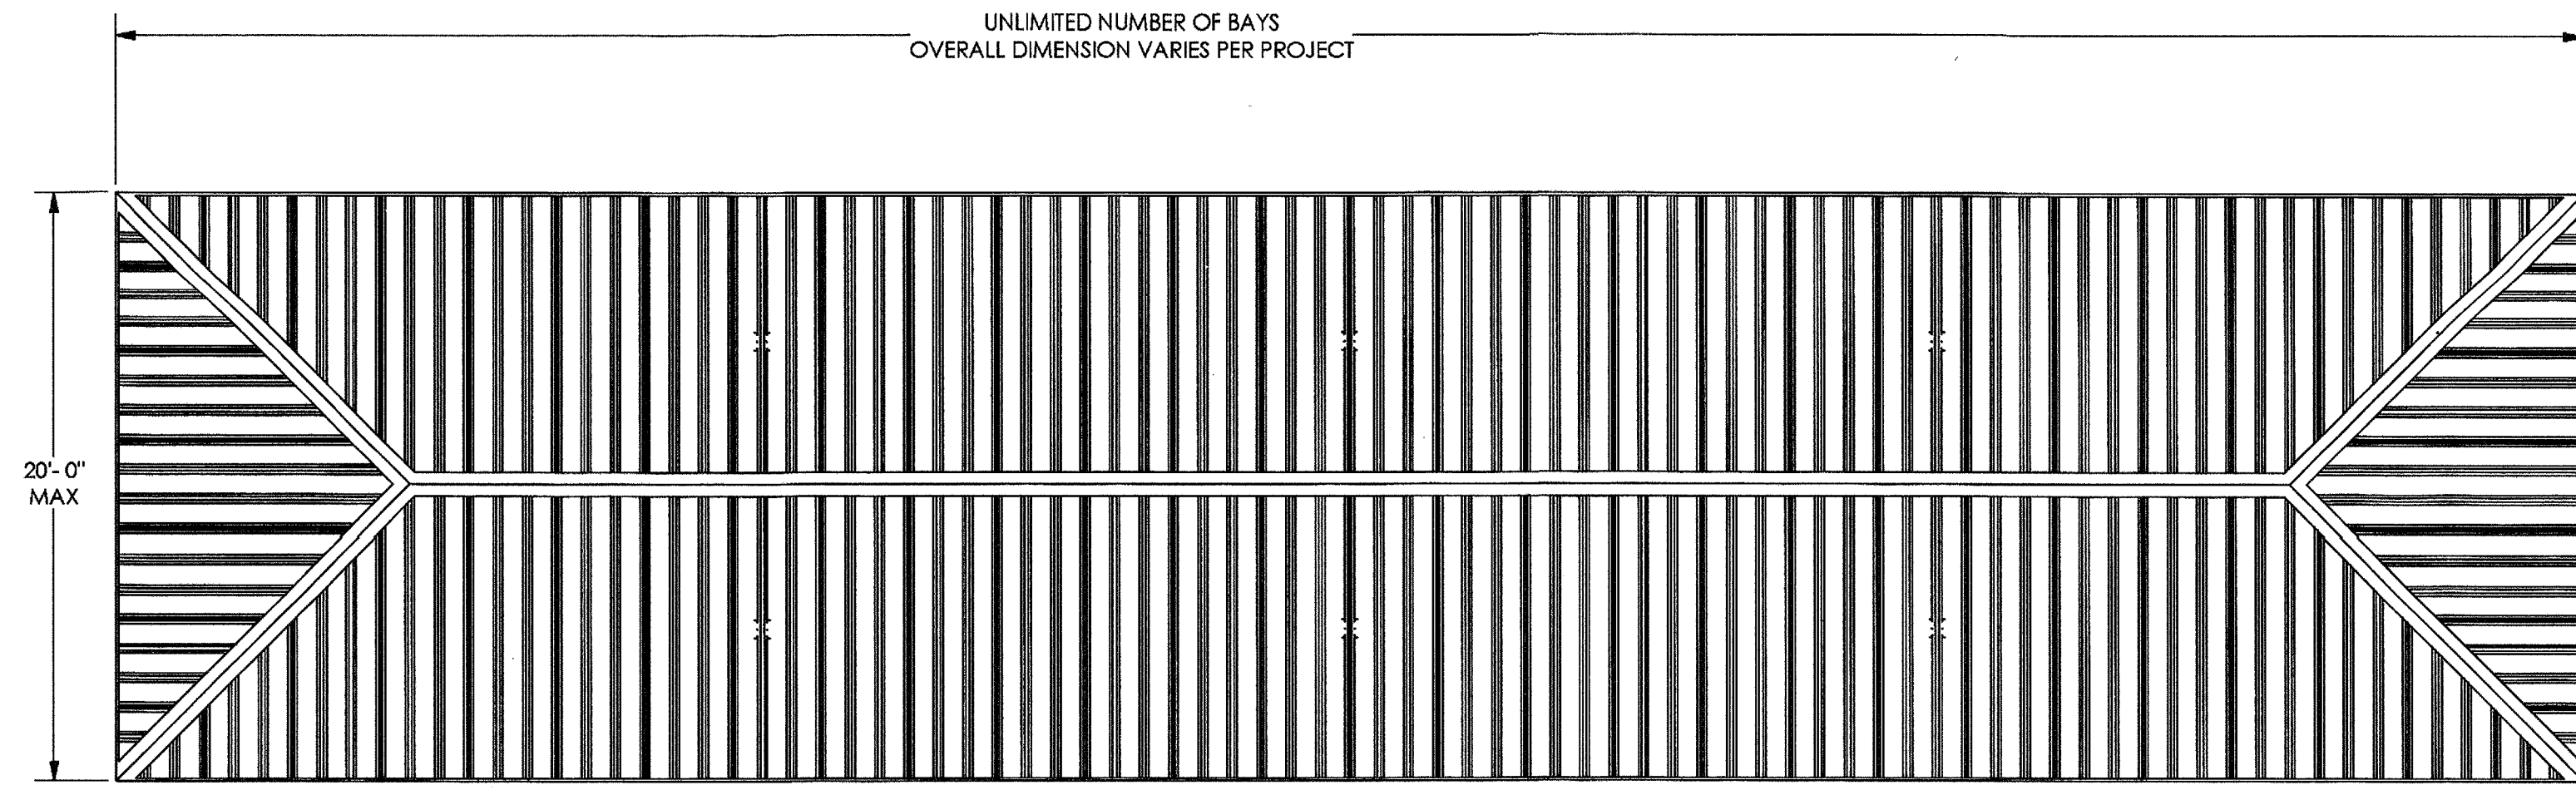


PLAN VIEW
SCALE: 3/16" = 1'-0"

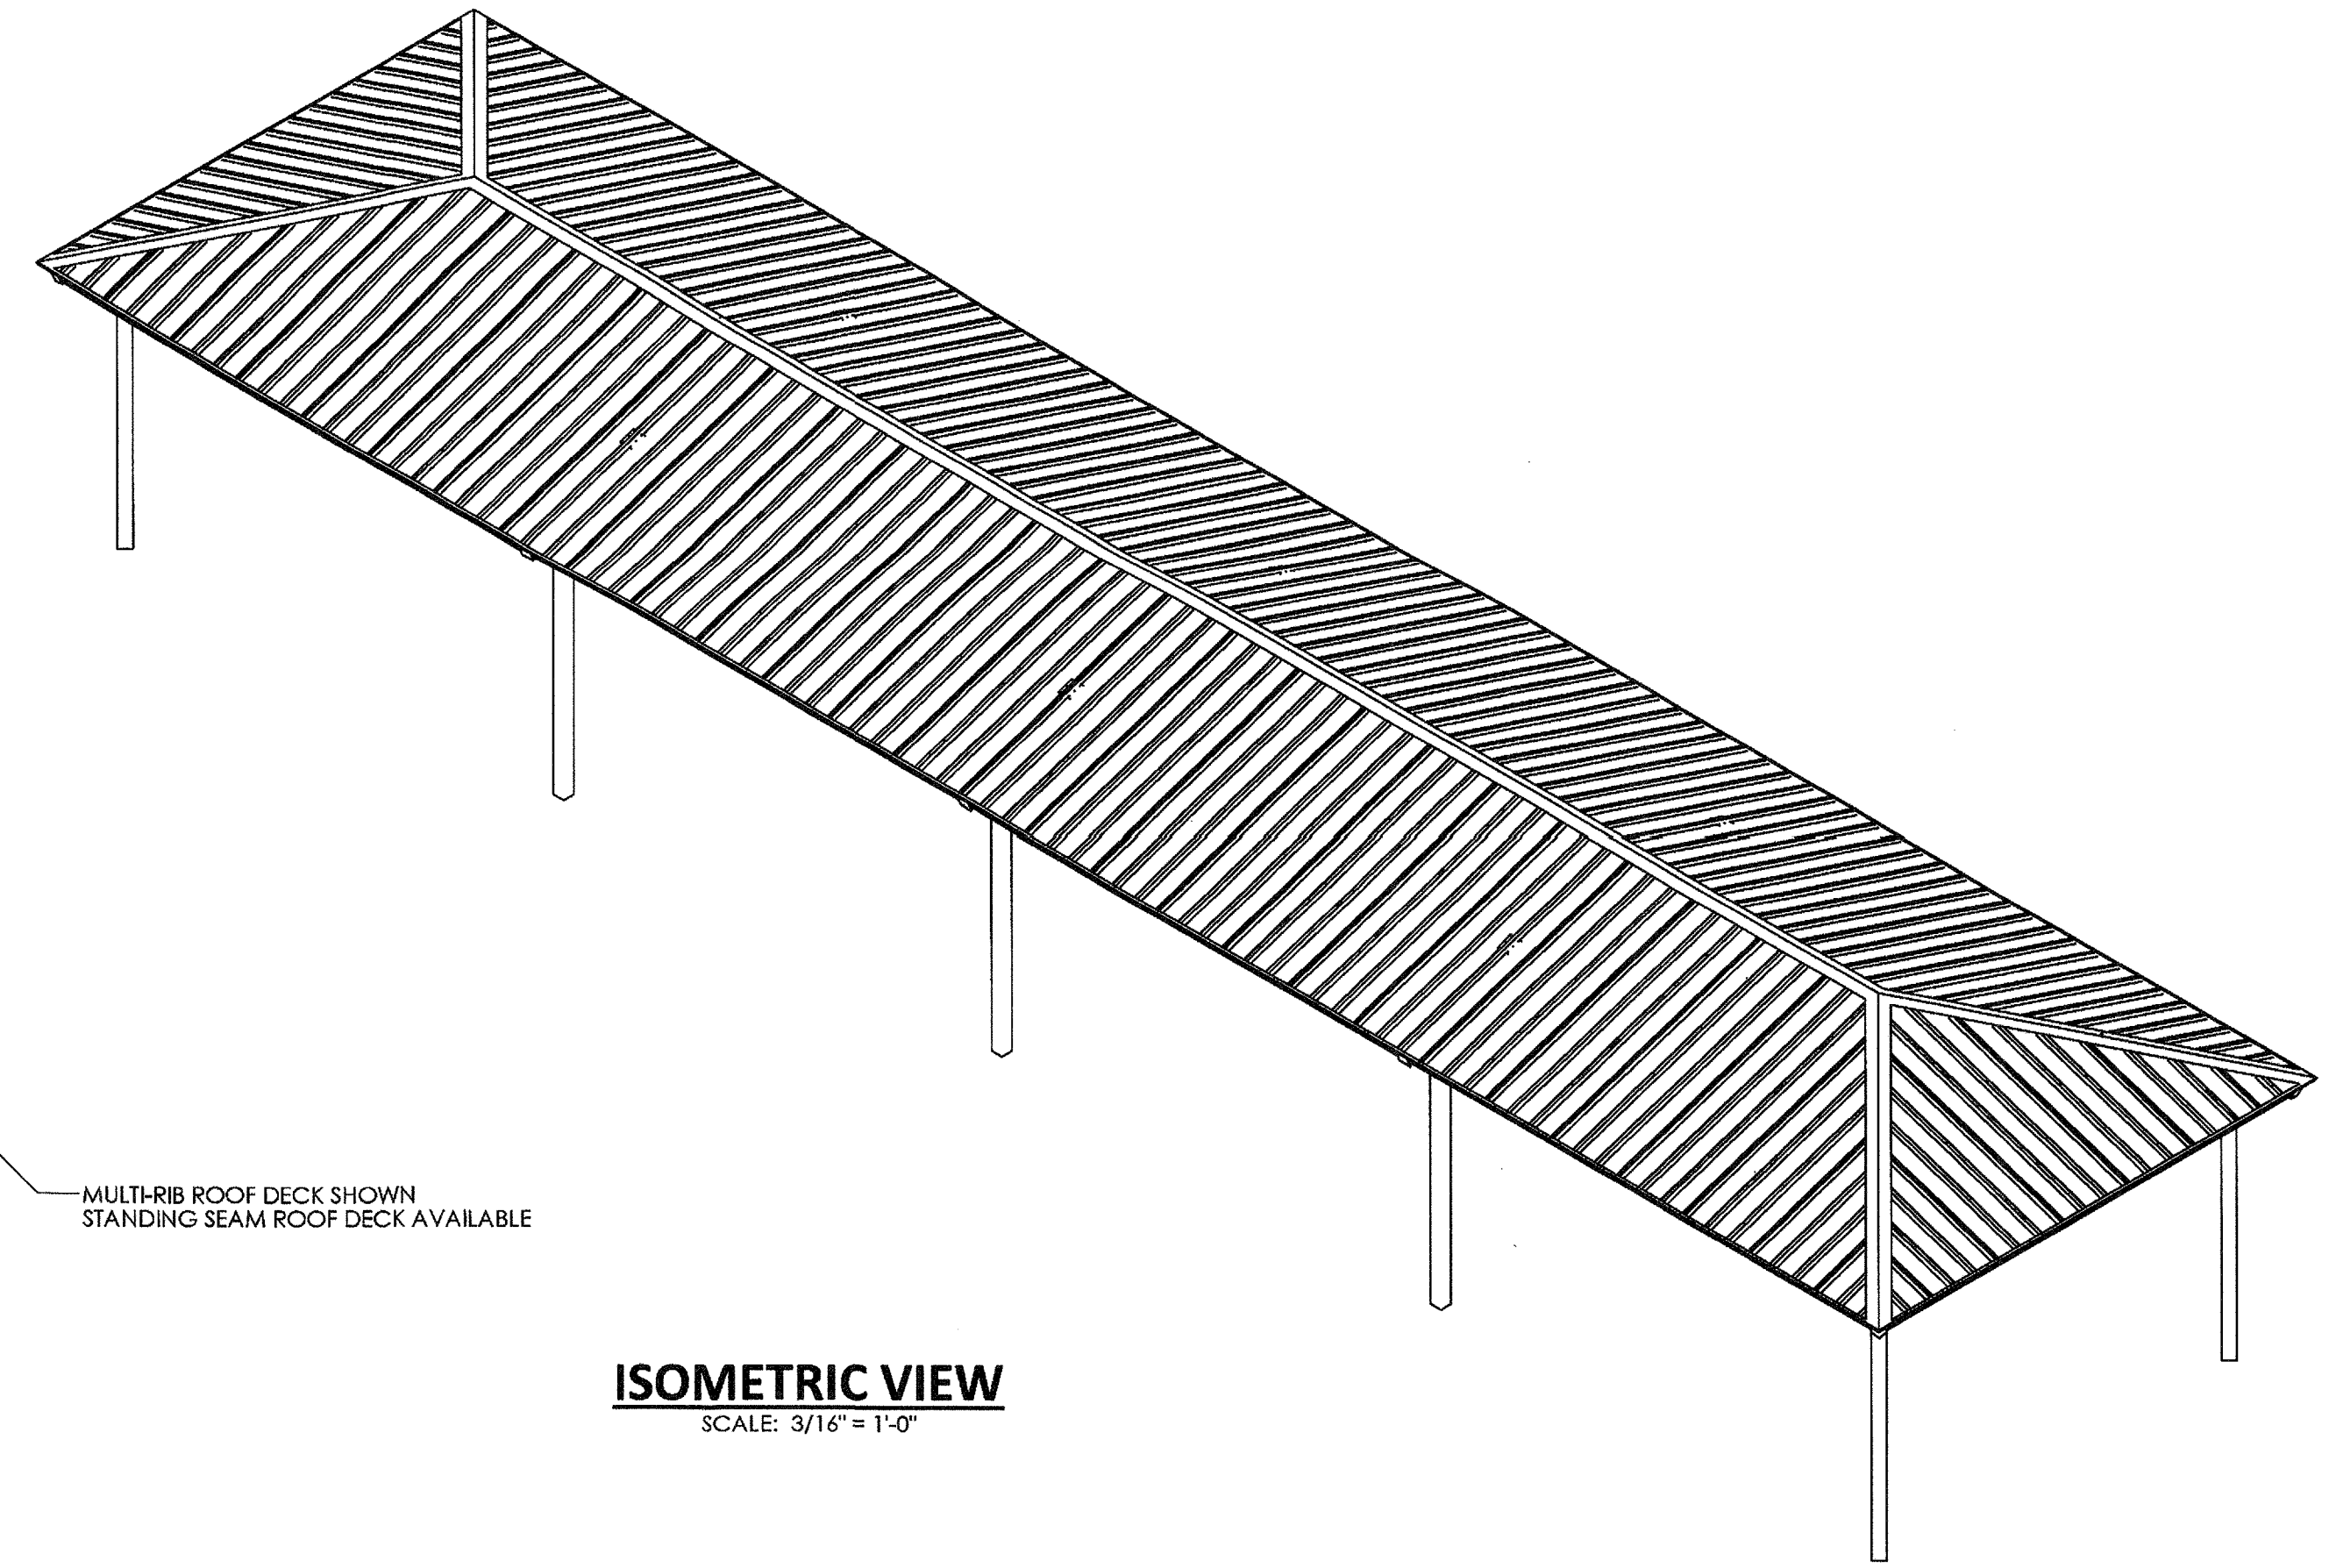

ISOMETRIC VIEW
SCALE: 3/16" = 1'-0"

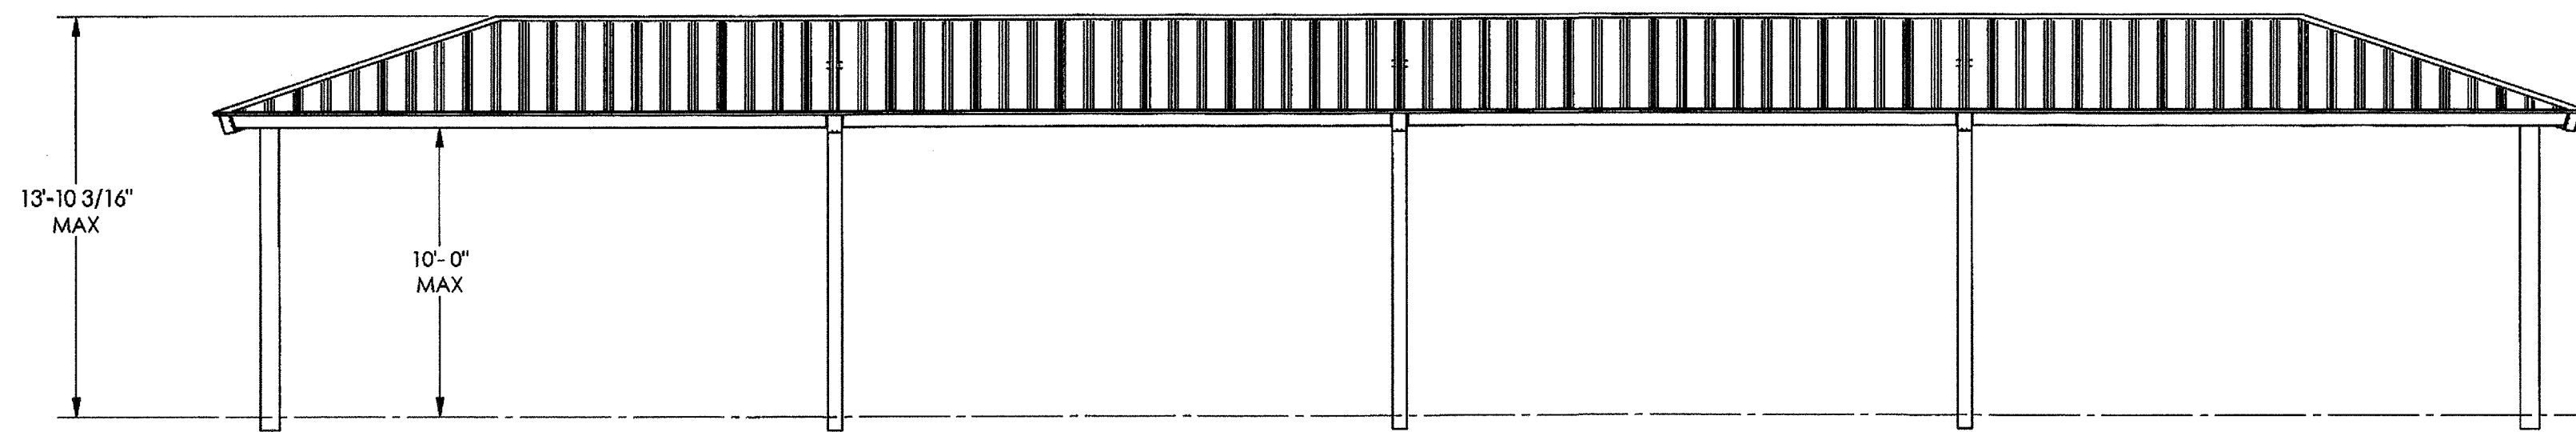





FRONT ELEVATION
SCALE: 3/16" = 1'-0"

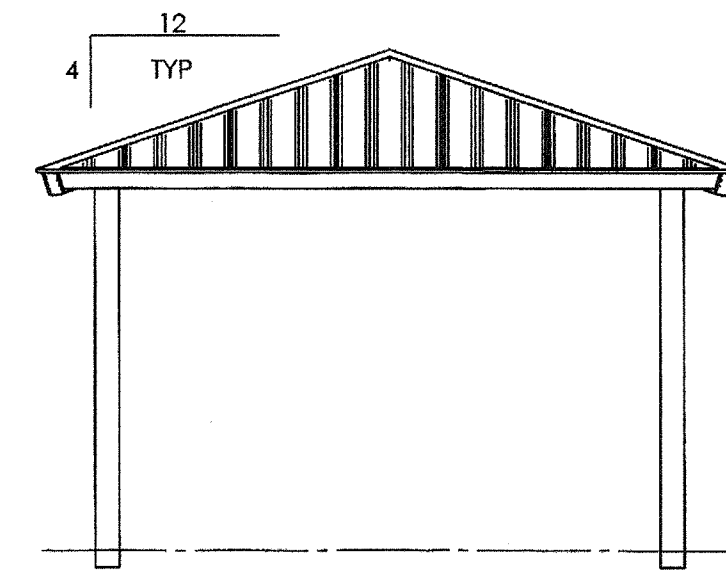

SIDE ELEVATION
SCALE: 3/16" = 1'-0"

FINISH GRADE
(ASSUMED AT CONSTANT
ELEVATION UNO)

FINISH GRADE
(ASSUMED AT CONSTANT
ELEVATION UNO)

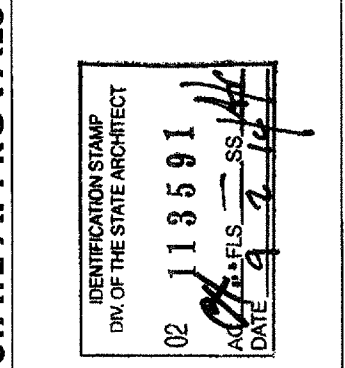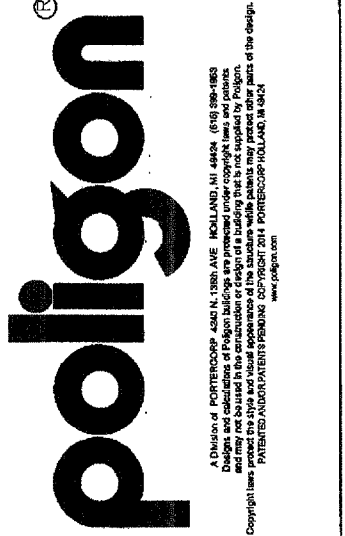


PRE-CHECK (PC) DOCUMENT
CODE: 2013 CBC
A SEPARATE PROJECT APPLICATION FOR CONSTRUCTION IS REQUIRED.

ARCHITECTURAL VIEWS
RAM 20
HIP ROOF (RAM)
PC DRAWINGS

DRAWN BY: JMD
CHECKED BY: CE
POLIGON # 51468

PD7.0





IDENTIFICATION STAMP
DIV. OF THE STATE ARCHITECT
N 03 118709
Date: JAN 17 2018

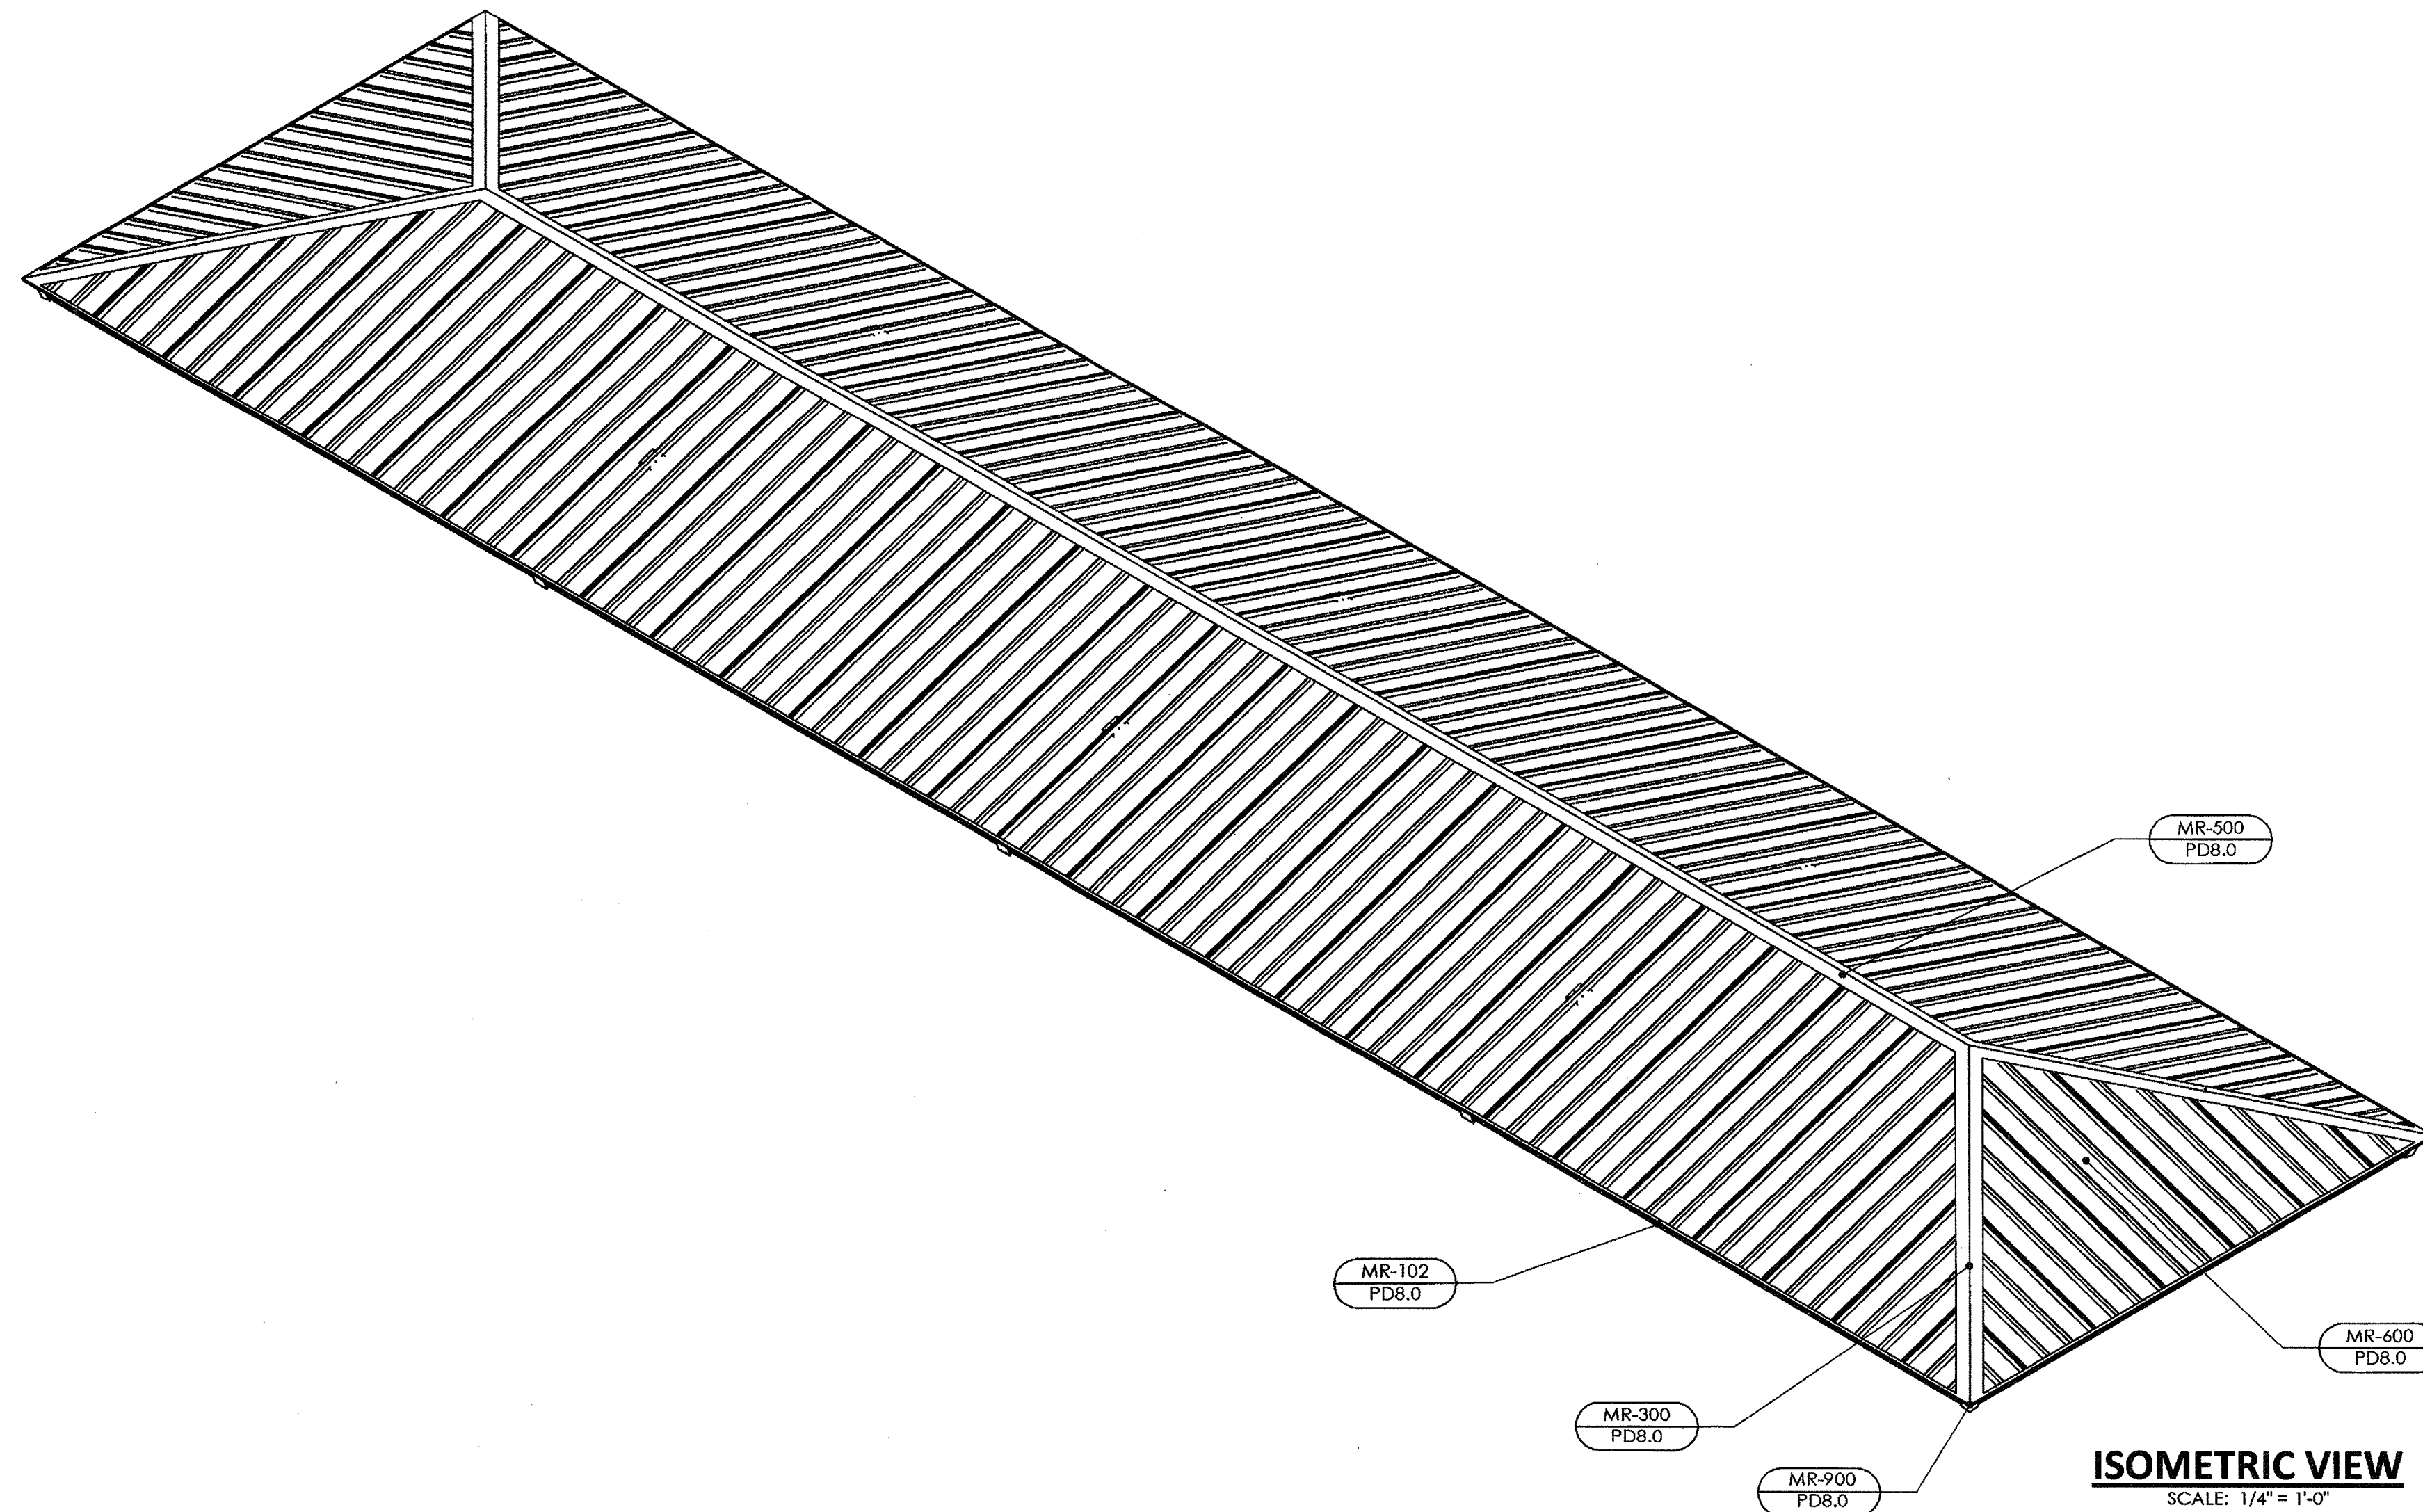

ISOMETRIC VIEW
SCALE: 1/4" = 1'-0"


ROOF LAYOUT NOTES (MR):

- IT SHALL BE THE RESPONSIBILITY OF THE ERECTOR TO ENSURE THAT THE DETAILS MEET THE BUILDING REQUIREMENTS AND TO ASSURE ADEQUATE WATER TIGHTNESS.
- THE PANELS SHOULD BE INSTALLED PLUMB, STRAIGHT, AND ACCURATELY TO THE ADJACENT WORK.
- FLASHING AND TRIM SHALL BE INSTALLED TRUE, AND IN PROPER ALIGNMENT, WITH ANY EXPOSED FASTENERS EQUALLY SPACED FOR THE BEST APPEARANCE.
- SEALANT SHALL BE FIELD APPLIED ON DRY, CLEAN SURFACES. SOME FIELD CUTTING AND FITTING OF PANELS AND FLASHING IS TO BE EXPECTED BY THE ERECTOR AND MINOR FIELD CORRECTIONS ARE A PART OF NORMAL ERECTION WORK.
- WORKMANSHIP SHALL BE OF THE BEST INDUSTRY STANDARDS AND INSTALLATION SHALL BE PERFORMED BY EXPERIENCED METAL CRAFTSMEN.
- METAL SHAVINGS FROM DRILLING OR INSTALLATION OF ROOF FASTENERS MUST BE CAREFULLY REMOVED FROM THE ROOF BY BRUSHING OR SWEEPING AT THE END OF EACH DAY DURING INSTALLATION. SHAVINGS LEFT ON THE ROOF WILL QUICKLY RUST AND STAIN THE ROOF FINISH.

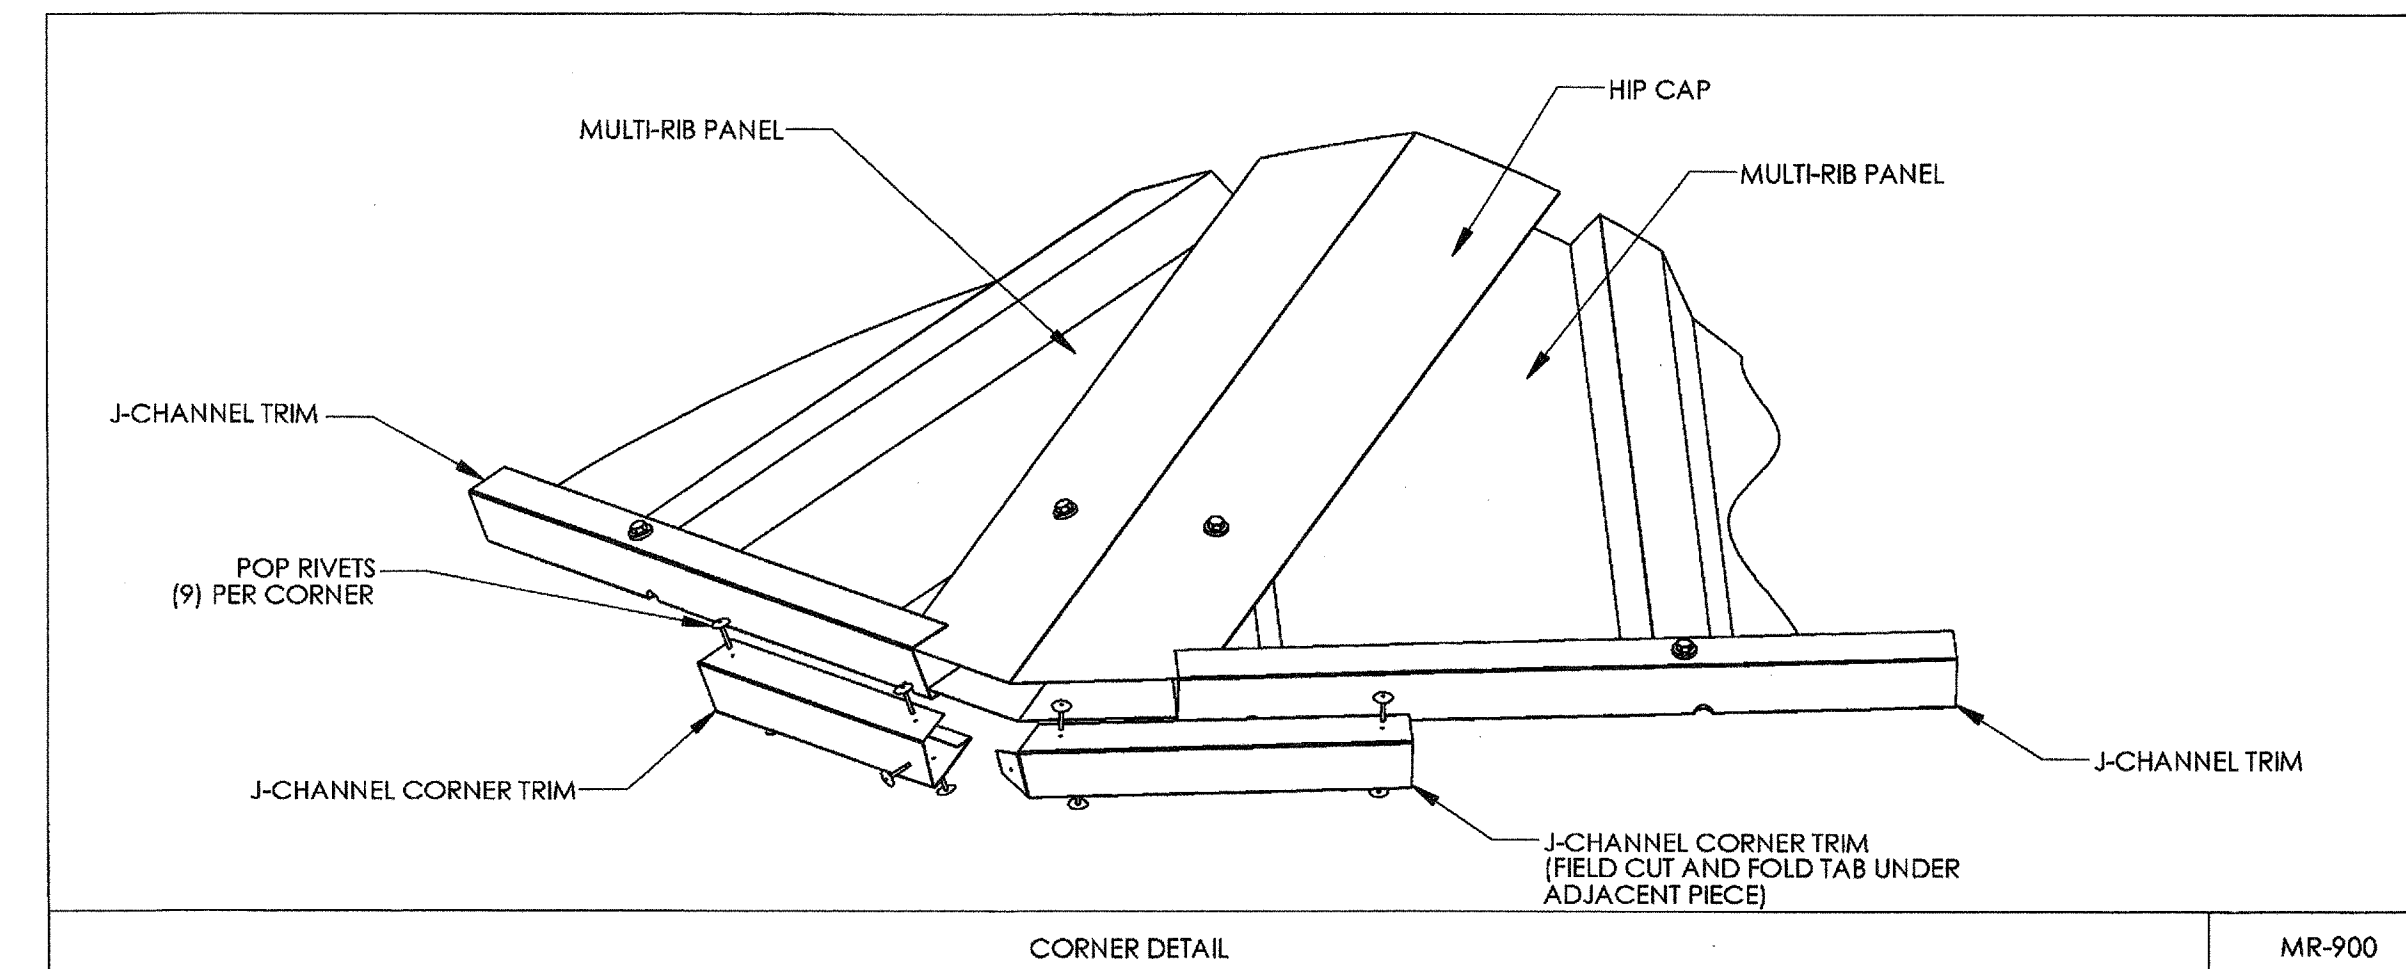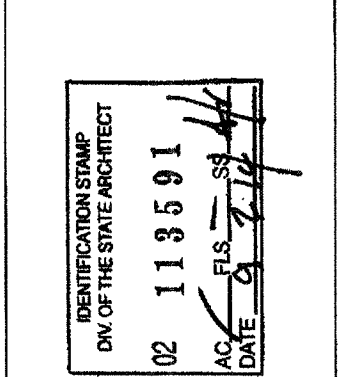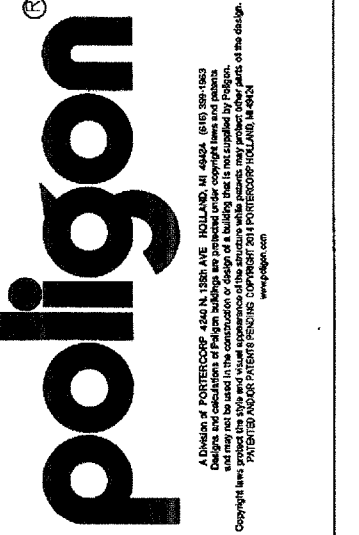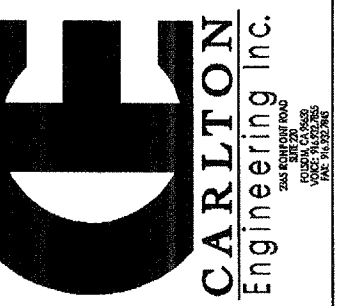


CORNER DETAIL

MR-900

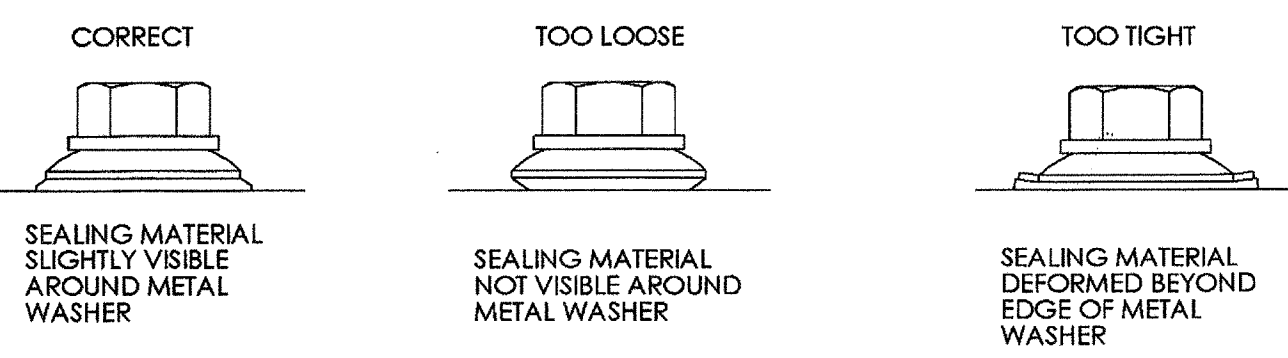


ROOF FASTENER TIGHTENING

MR-950

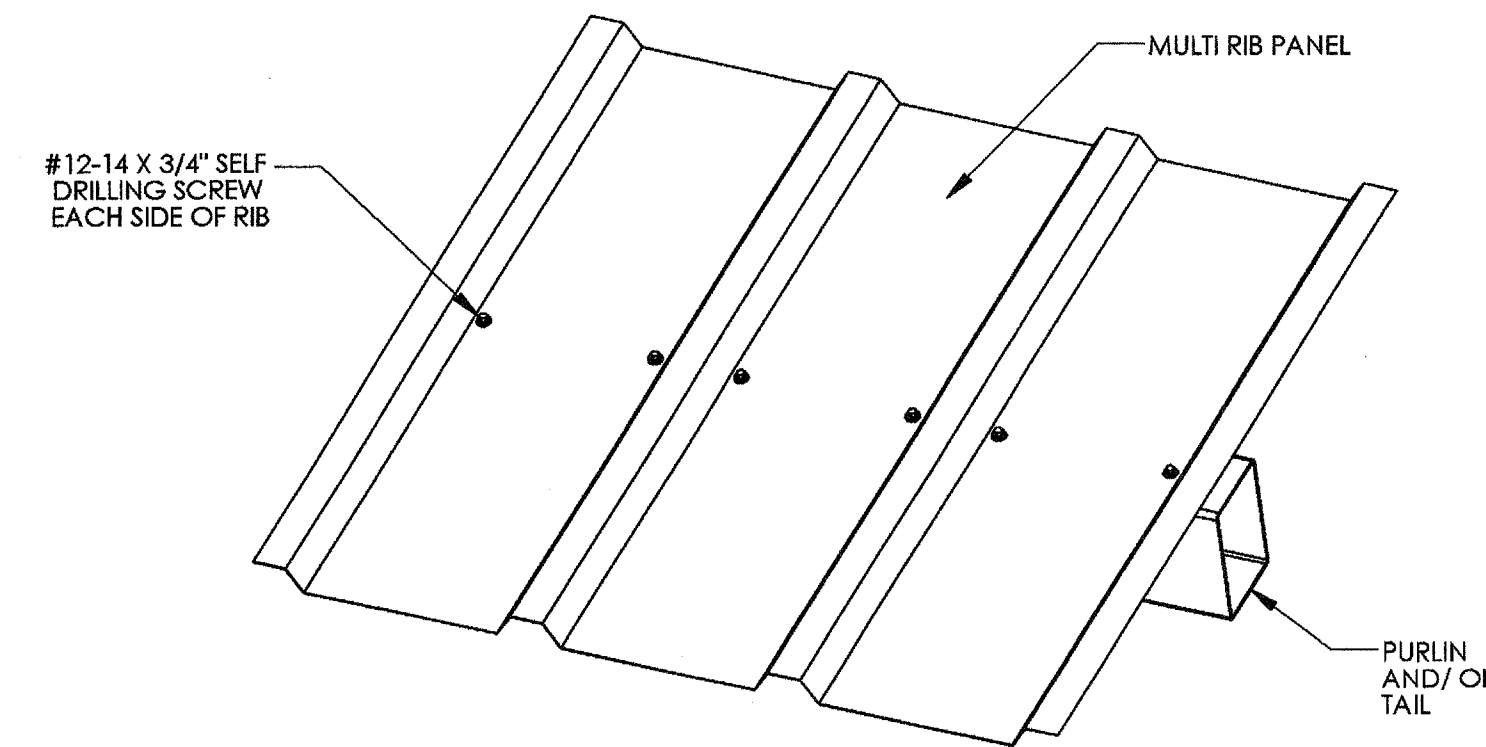


PURLIN DETAIL

MR-600

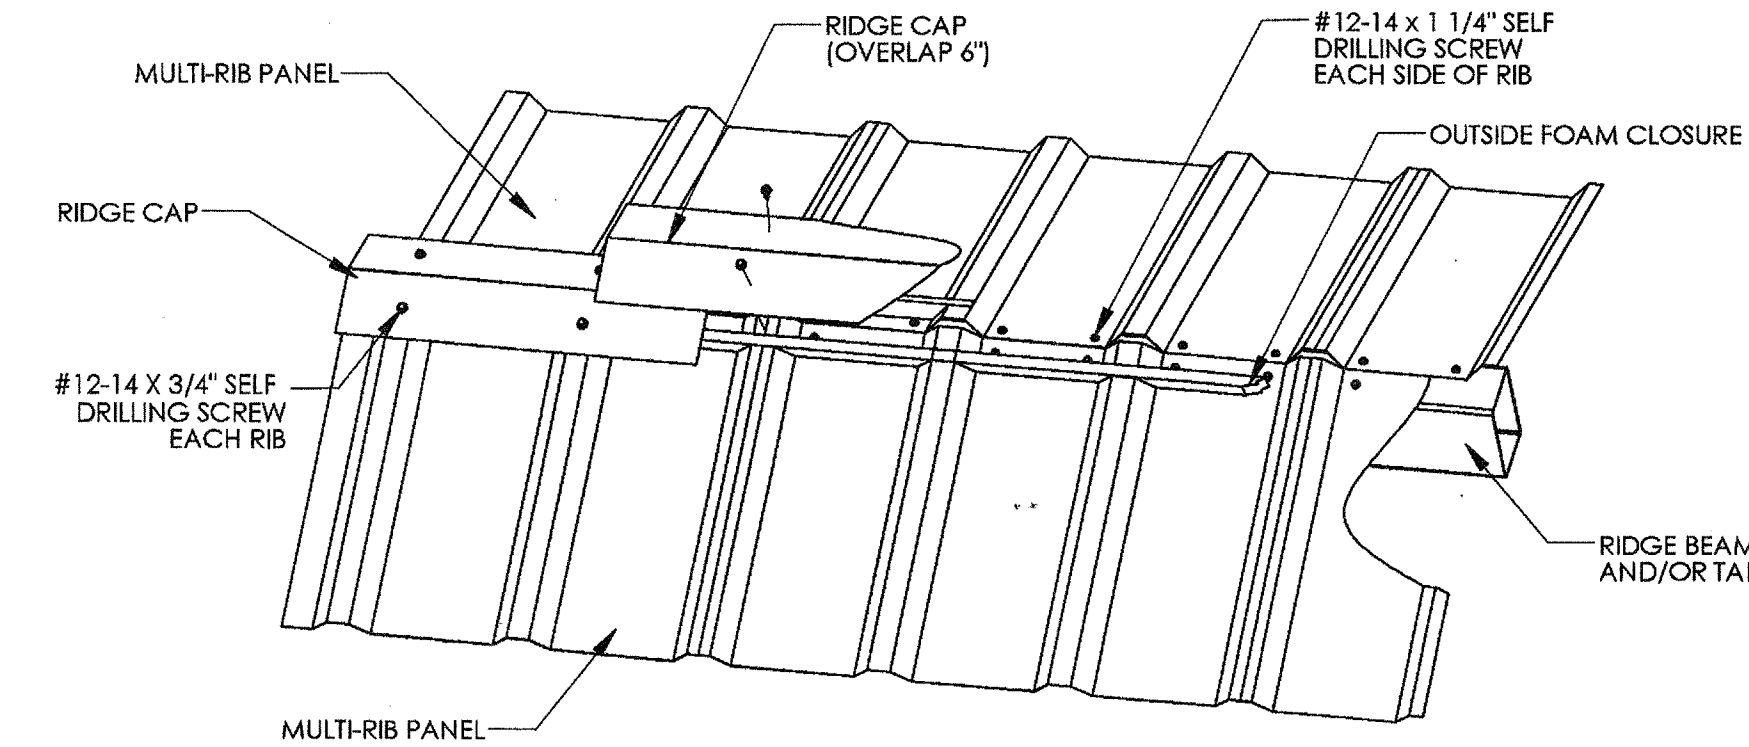


RIDGE DETAIL

MR-500

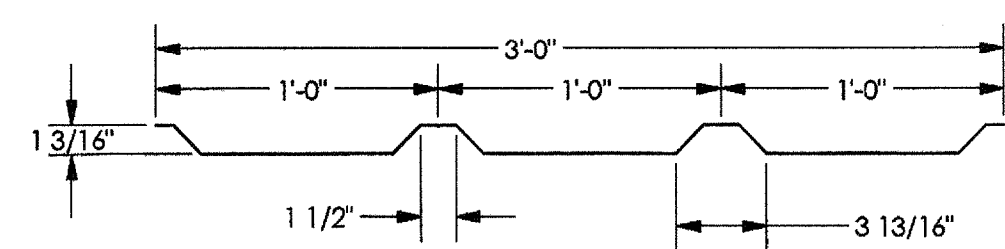


MR ROOF DECK SECTION PROPERTIES

MR-951

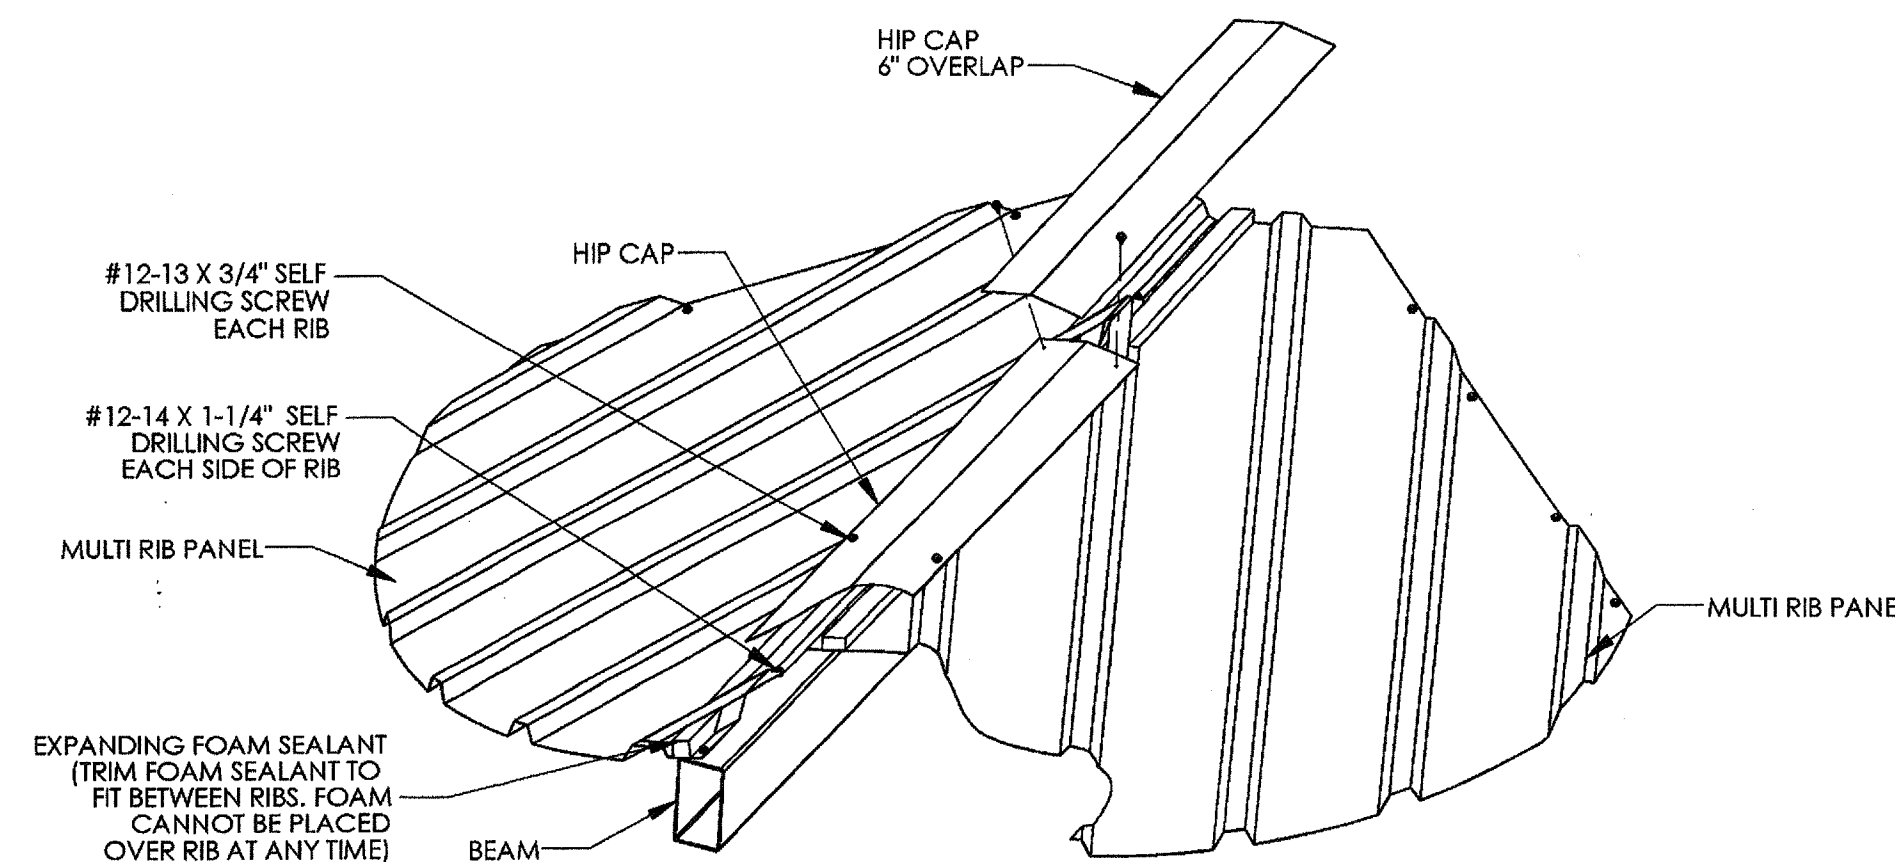

BEAM DETAIL

MR-300

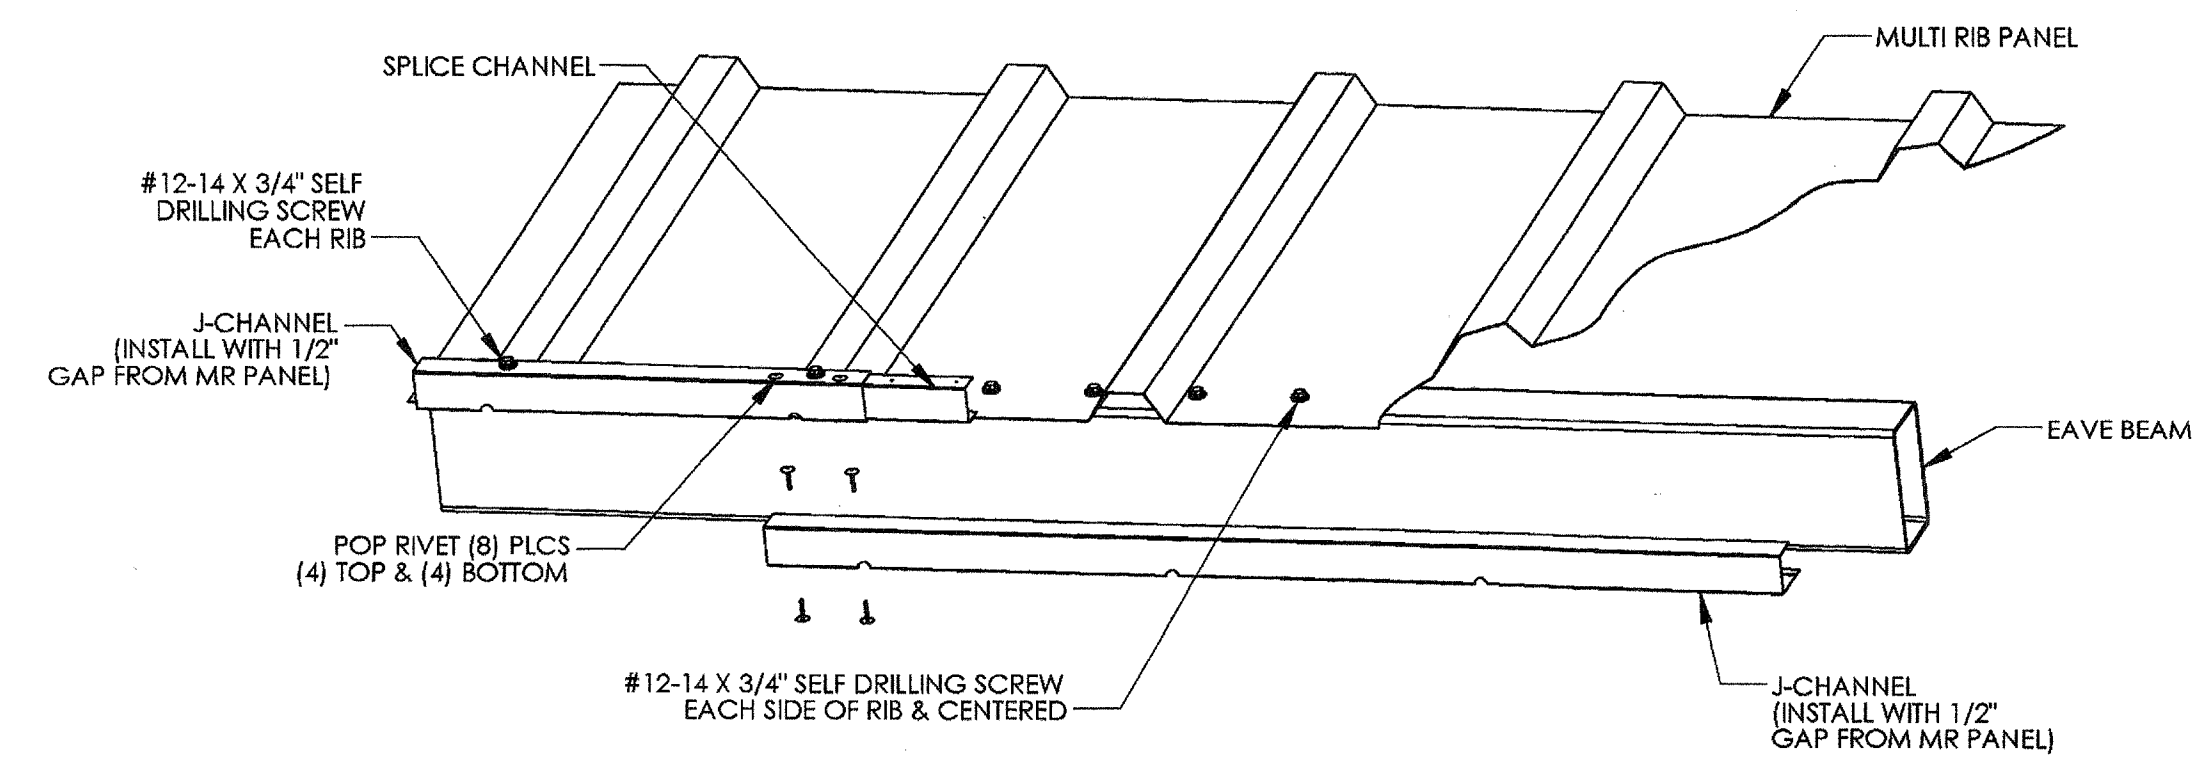

EAVE DETAIL

MR-102

PRE-CHECK (PC) DOCUMENT


ROOF CONNECTION DETAILS
MR ROOF DECK

CODE: 2013 CBC
A SEPARATE PROJECT APPLICATION FOR CONSTRUCTION IS REQUIRED.

HIP ROOF (RAM)
PC DRAWINGS


PD8.0

DRAWN BY: JMD
CHECKED BY: CE
POLYGON #: 51458

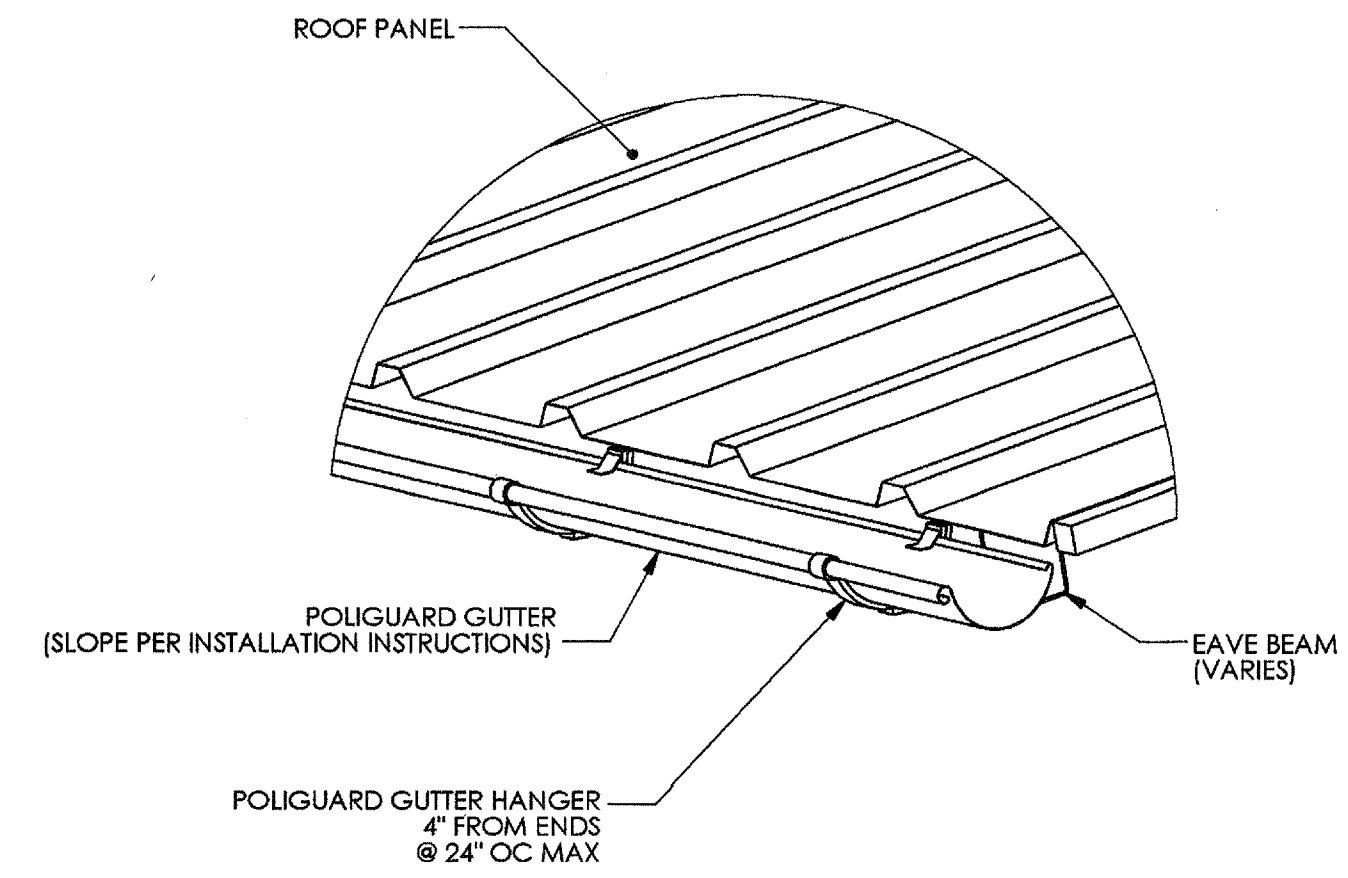

GUTTER DETAIL

GS-100

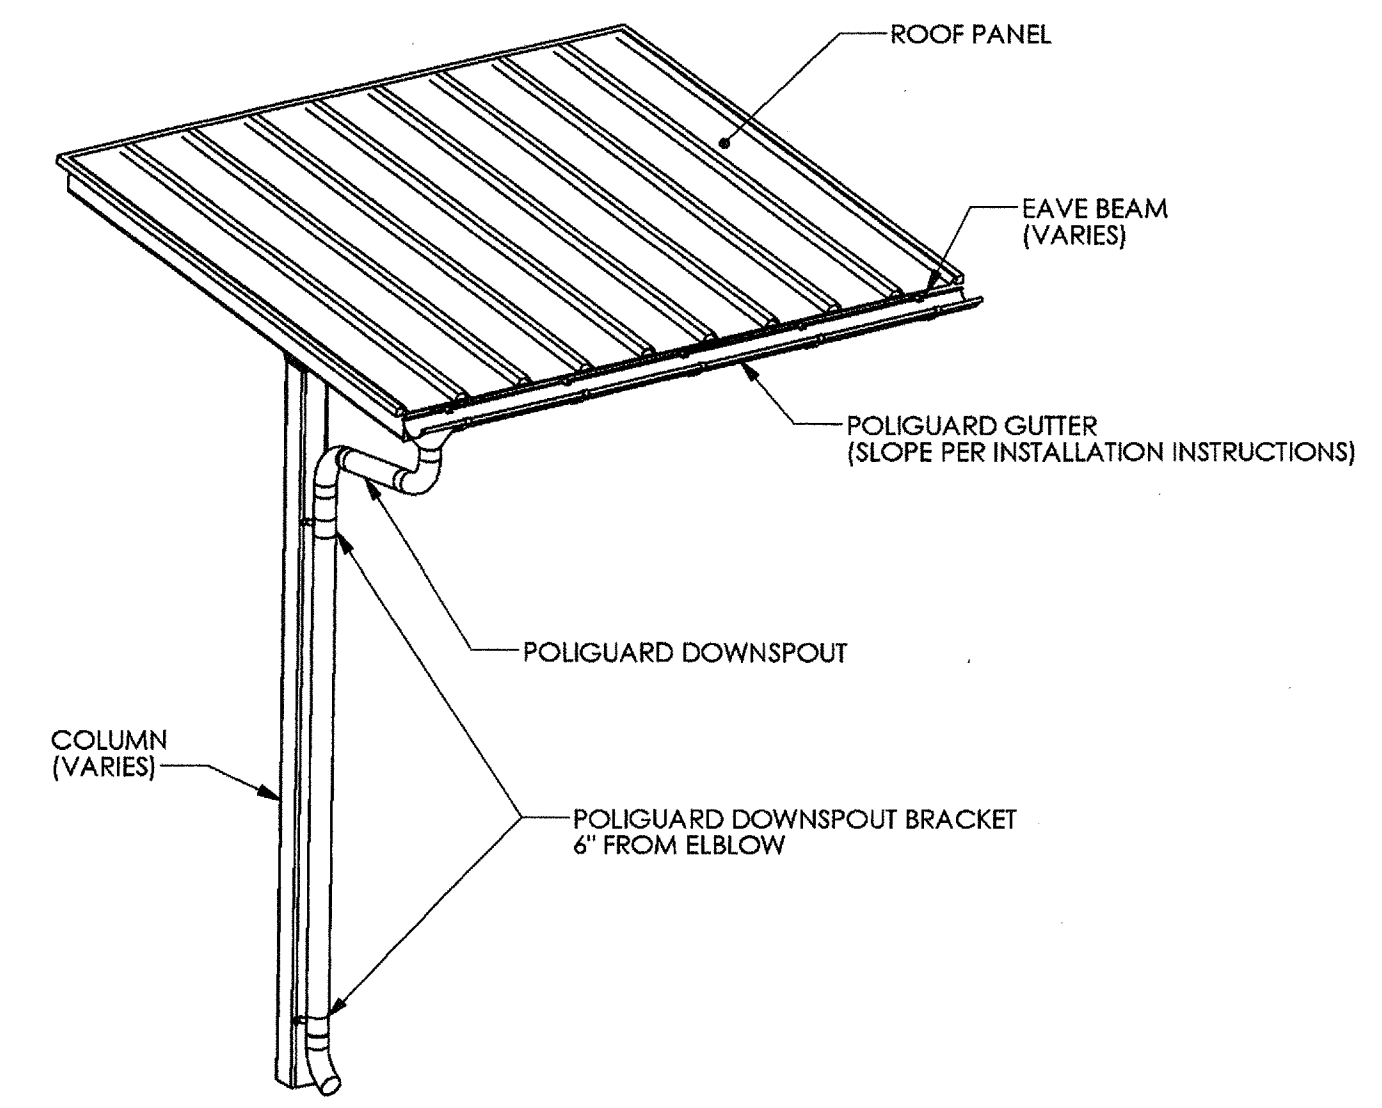


DOWNSPOUT DETAIL

GS-200


POLIGUARD GUTTER SYSTEM NOTES:

1. PREFABRICATED GUTTER SYSTEM IS ATTACHED TO THE STRUCTURE AFTER ROOF IS INSTALLED.
2. DETAILED INSTALLATION INSTRUCTIONS ARE SHIPPED WITH THE STRUCTURE.
3. DOWNSPOUTS REQUIRED AT EACH COLUMN.

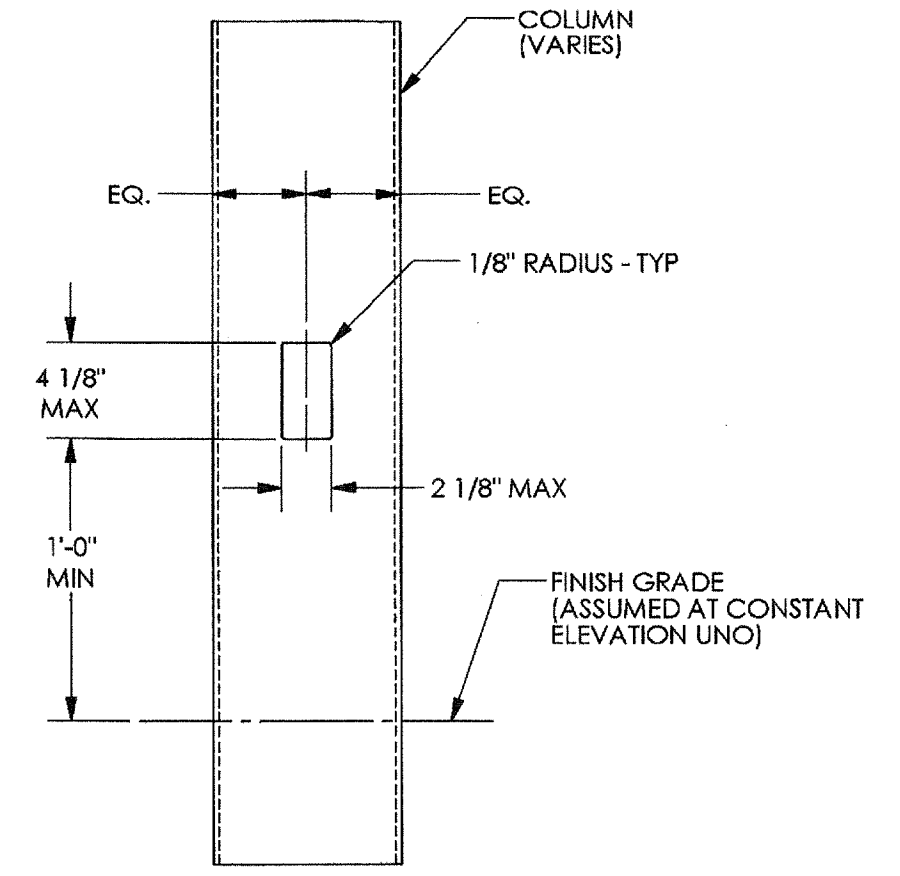

ELECTRICAL CUTOUT IN COLUMNS

EC-100




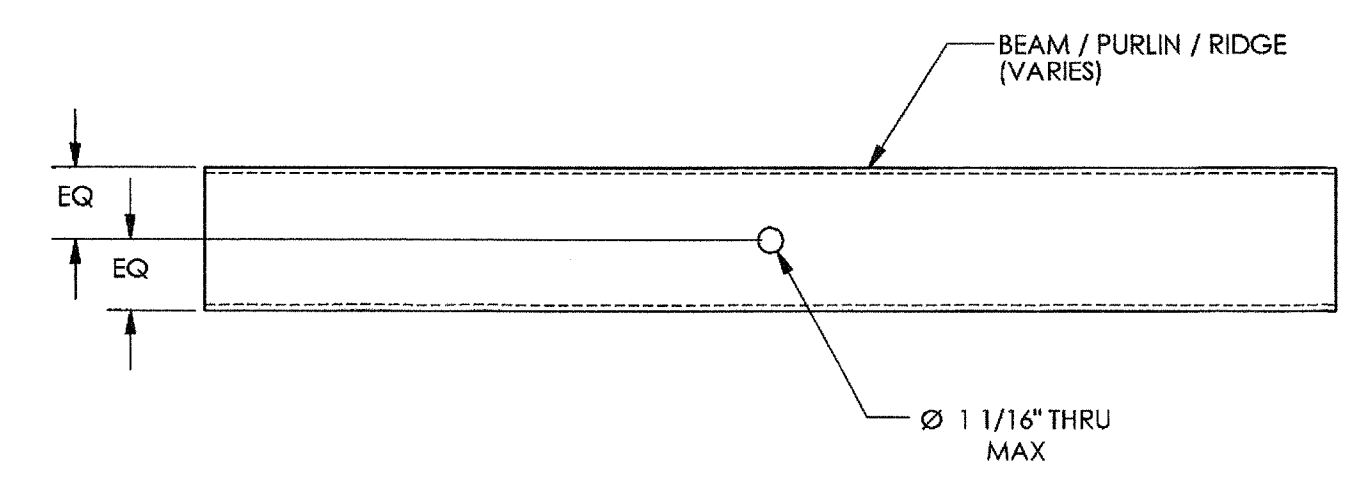


ELECTRICAL CUTOUT IN BEAMS / PURLINS / RIDGES

EC-200

ELECTRICAL CUTOUT NOTES:

1. MAXIMUM ONE CUTOUT PERMITTED IN EACH MEMBER.
2. CUTOUTS CAN BE PLACED ON ANY SIDE OF A MEMBER.
3. CUTOUTS CAN BE PLACED ALONG MEMBERS AS INDICATED IN THE DETAILS.
4. ARCHITECTS REQUESTING CUTOUTS MUST MARKUP APPROVED PC DRAWINGS TO LOCATE CUTOUTS FOR APPROVAL AND FABRICATION.

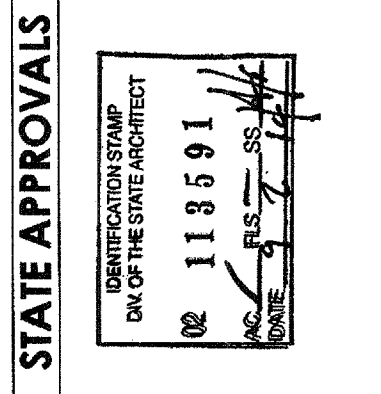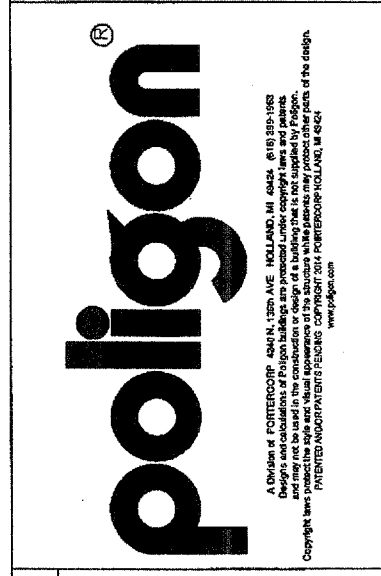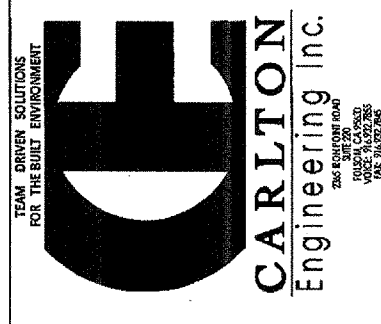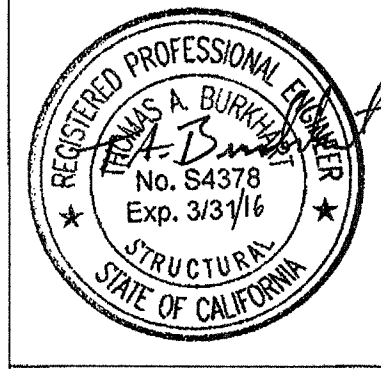

PRE-CHECK (PC) DOCUMENT
 CODE: 2013 CBC
 A SEPARATE PROJECT APPLICATION FOR CONSTRUCTION IS REQUIRED.

MISC DESIGN OPTIONS
 HIP ROOF (RAM)
 PC DRAWINGS

PD9.0

IDENTIFICATION STAMP
 DIV. OF THE STATE ARCHITECT
 N 03 118709
 AC *VLS* *SS*
 Date: JAN 17 2018