

RODD HANSEN, ARCHITECT, L.L.C.
ARCHITECTURE AND PLANNING

Date: June 3, 2015
To: All Prime Bidders
RE: Eugene School District 4j
Edgewood Elementary School – Cafeteria HVAC 2015
C.I.P. No. 420.248.032



ADDENDUM #1:

YOU ARE HEREBY DIRECTED TO PERFORM THE FOLLOWING WORK AND INCLUDE THE FOLLOWING WORK IN YOUR BID.

- Item #1: There are (6) adjustable recessed light fixtures that will be removed and the ceiling tile finish shall be restored with salvage ceiling tiles. The electrical wiring shall be removed back to the nearest junction box and terminated.
- Item #2: Sheet A3.1 – Floor Plan: The (2) access doors / openings above the man door shown on the south wall of Room 111 shall remain as is and not be demolished.
- Item #3: Sheet A3.1: - Floor Plan: In Room 111, there is a filter hole in the ceiling of the closet that needs to be patched with plywood.
- Item #4: Sheet A3.1: - The resistance heater above the closet (Room 111) shall remain in place.
- Item #5: The existing ceiling / wall tile finishes, mastic and substrates have tested negative for asbestos and are mechanically fastened. The drywall substrate beneath the hardboard and wallboard ceiling tiles has not been tested, and will be reviewed with the Contractor by the District's asbestos safety specialist prior to beginning the work. All ceiling / wall tiles shall be removed and salvaged for patching at all new construction infill areas.
- Item #6: See the attached detail AD-1 indicating duct supports, framing attachments and steel header(s).
- Item #7: See the attached detail AD-2 showing the vertical joint connection between the existing wall finishes and the new wall finishes.

END OF ADDENDUM #1


FASTEN DUCT HANGERS ABOVE THE NEUTRAL AXIS @ 4'-0" O.C. MAX. CONTRACTOR TO SUBMIT DUCT HANGING HARDWARE FOR ENGINEER'S REVIEW - TYP.

PROVIDE FULL-HT. WEB STIFFENER @ DUCT HANGERS - TYP.

NEUTRAL AXIS OF ROOF FRAMING

2'-6" - CONTRACTOR TO VERIFY CLEARANCE

L3x3x1/4" TO SPAN OVER STUD(S) REMOVED FOR DUCT ACCESS - FASTEN TO DBL. TOP. PL. W/(4) 1/4"x3" S.D.S. SCREWS EA. END - TYP.

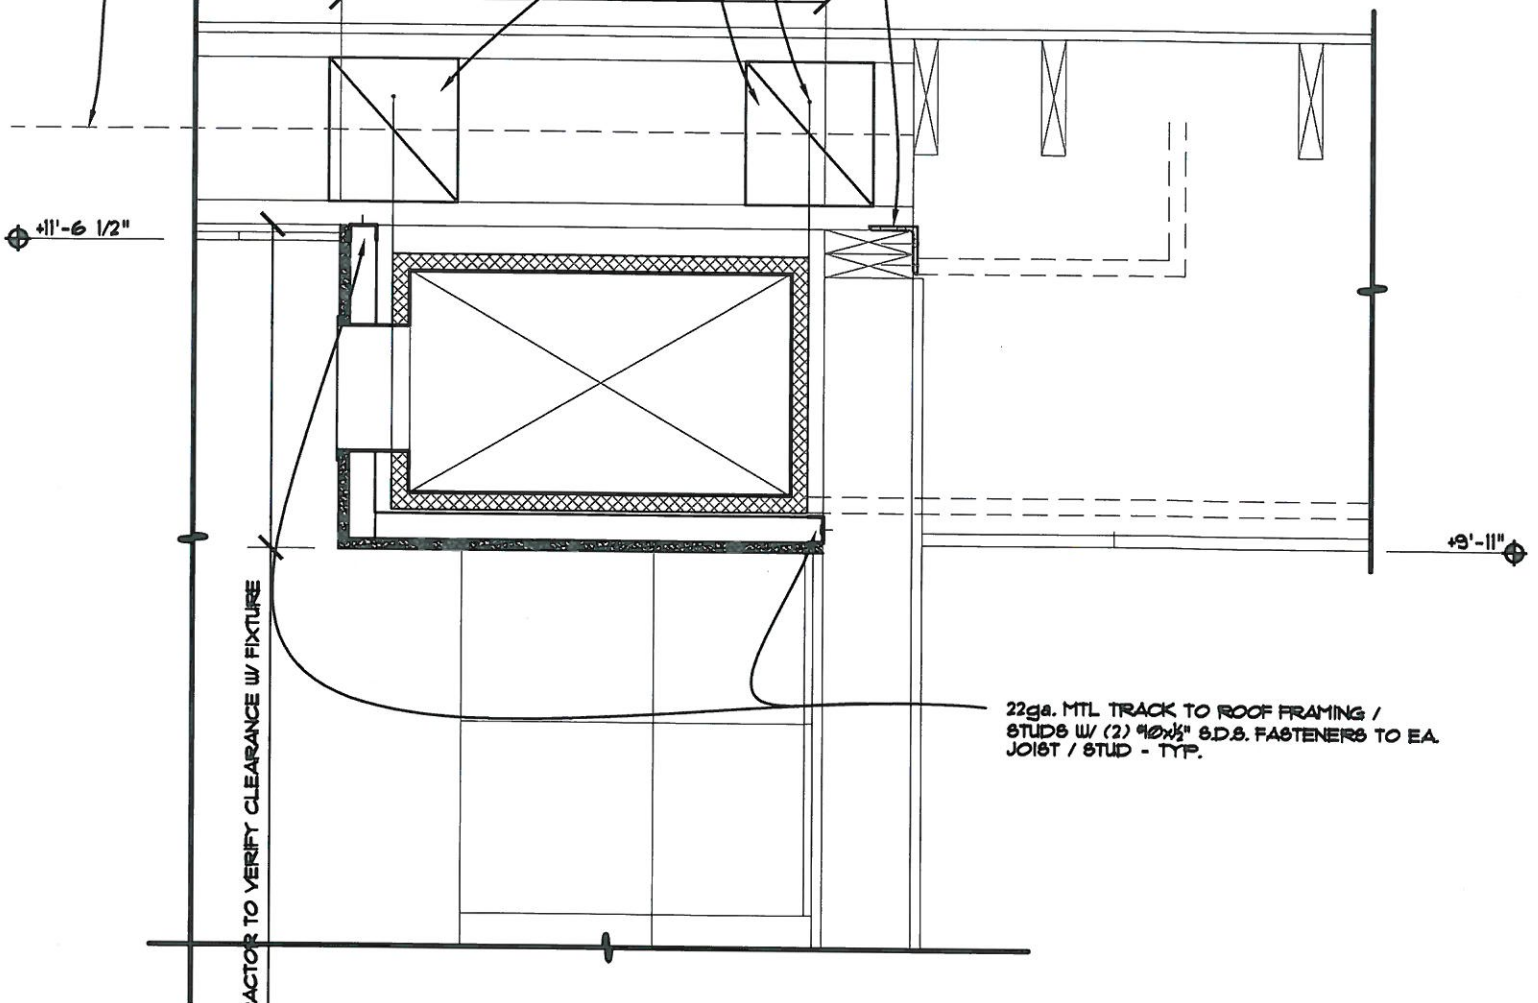

EUGENE SCHOOL DISTRICT 4J:
EDGEWOOD ELEMENTARY SCHOOL
CAFETERIA HVAC 2015

871 E. 43RD STREET, EUGENE, OREGON
C.I.P. NO. 420248032

RODD HANSEN, ARCHITECT, L.L.C.
ARCHITECT, P.C.

1551 Oak Street Suite A
Eugene, Oregon 97401
Phone: (541)-681-7800
Fax: (541)-681-1200
E-Mail: office@rarchitectural.com

THE DOCUMENT AND THE IDEAS AND DESIGNS INCORPORATED HEREIN ARE THE PROPERTY OF RODD HANSEN, ARCHITECT, L.L.C. AND IS NOT TO BE USED, IN WHOLE OR PART, FOR ANY OTHER PROJECT WITHOUT THE WRITTEN AUTHORIZATION OF RODD HANSEN, ARCHITECT, L.L.C.



REVISION DATE

ISSUE: 06-03-2015

DRAWN: RH

JOB NO.: 1171.02192015

AD = 1

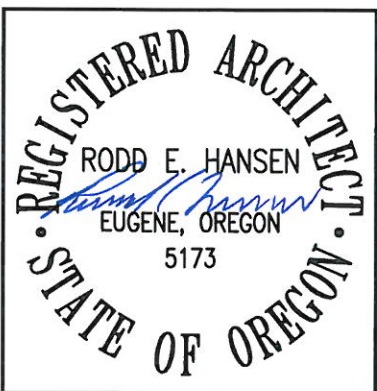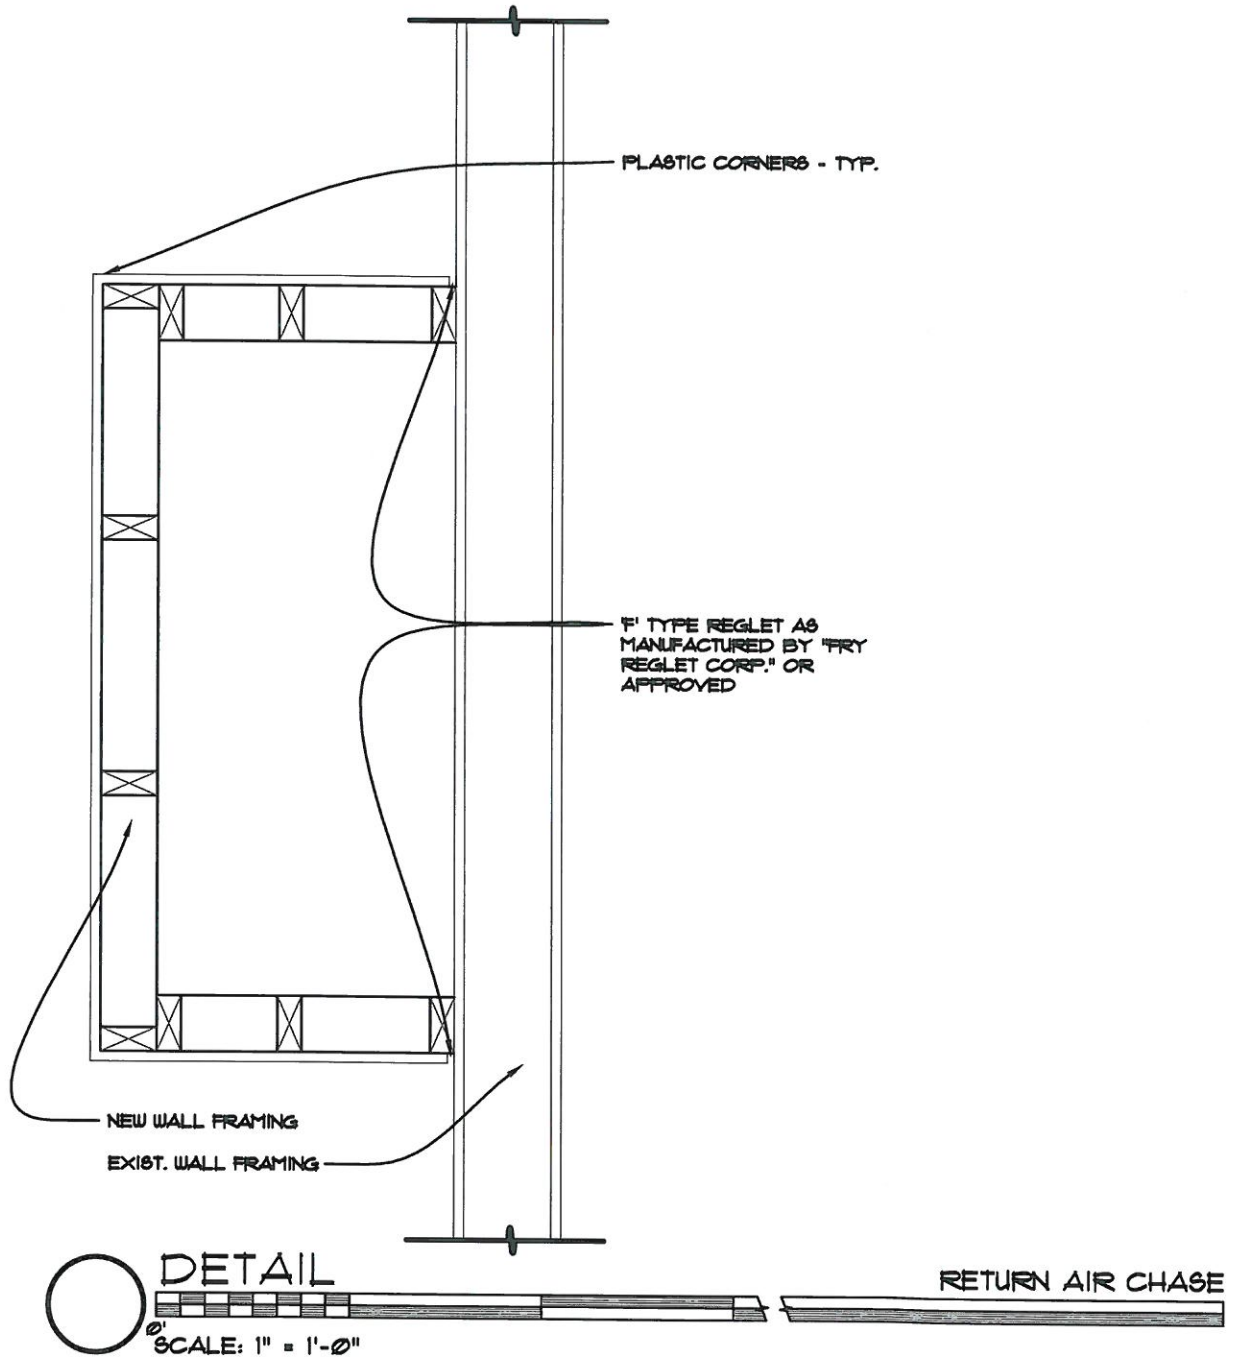

EUGENE SCHOOL DISTRICT 4J:
EDGEWOOD ELEMENTARY SCHOOL
CAFETERIA HVAC 2015

571 E. 43RD STREET, EUGENE, OREGON
 C.I.P. NO. 420240032

RODD HANSEN, ARCHITECT, L.L.C.
 ARCHITECT P.C.

1551 Oak Street Suite A
 Eugene, Oregon 97401
 Phone: (541)-687-7800
 Fax: (541)-687-1200
 E-Mail: office@rharchitectural.com

THE DOCUMENT AND THE IDEAS
 AND DESIGNS INCORPORATED
 HEREIN ARE THE PROPERTY OF
 RODD HANSEN, ARCHITECT, L.L.C.
 AND IS NOT TO BE USED, IN
 WHOLE OR PART, FOR ANY OTHER
 PROJECT WITHOUT THE WRITTEN
 AUTHORIZATION OF RODD HANSEN,
 ARCHITECT, L.L.C.

REVISION DATE
 ISSUE: 06-03-2015
 DRAWN: RH
 JOB NO.: 1177.02192015

AD = 2