

MULTISITE ROOFING 2016  
Kelly Middle School  
Willard School  
C.I.P. No. 450.780.209

ROBERTSON/SHERWOOD/ARCHITECTS pc  
132 E. Broadway - Suite 540  
Eugene, Oregon  
Project No. 1607



This Addendum forms a part of the Contract Documents and modifies the original Bid Documents dated April 13, 2016 as noted below. Acknowledge receipt of this Addendum in the space provided on the Bid Form. Failure to do so may subject Bidder to disqualification.

### PROJECT MANUAL

1. INVITATION TO BID – DOCUMENT 00 11 13

A. Article 1.2, add the following paragraph:

“ D. In addition to work described in Paragraph A above, project will include two approximately 10-foot square portable long jump pit covers, with integral rollers and single-ply roof membrane.”

2. SUMMARY OF WORK – SECTION 01 11 00

A. Pre-Bid Conference: A non-mandatory pre-bid conference was held at 10:00 AM on Tuesday, May 19 at the sites. A list of attendees is attached to this Addendum.

3. LADDERS – SECTION 05 51 33

A. PART 3 EXECUTION, add the following:

“3.5 PREPARATION

A. To eliminate conflict with ladder:

1. Relocate existing conduit attached to wood web joists at roof.
2. Relocate existing suspended fluorescent light fixture approximately 36 inches to the west.”

4. THERMOPLASTIC MEMBRANE ROOFING – SECTION 07 54 00

A. Article 2.5, Paragraph B; change Paragraph A to read as follows:

“A. Cover Board: Glass mat-faced, water and moisture-resistant gypsum board, UL Class A fire rated; 1/4 inch thick; 150 psi compressive strength.

1. Invinsa FR Roof Board by Johns Manville: [www.jm.com](http://www.jm.com).
2. Substitutions: See Section 01 60 00 - Product Requirements.

## DRAWINGS

### 5. DRAWING SHEET A1

- A. Roof Types, Roof Assembly Type 1: Change thickness of ridged insulation from 1 inch to 1-1/2 inch.
- B. Kelly Middle School Roof Plan, B1/A1: Provide new rigid insulation to lower edge of crickets at north, west, and east walls. Refer to attached Detail Sheet AD1-1.

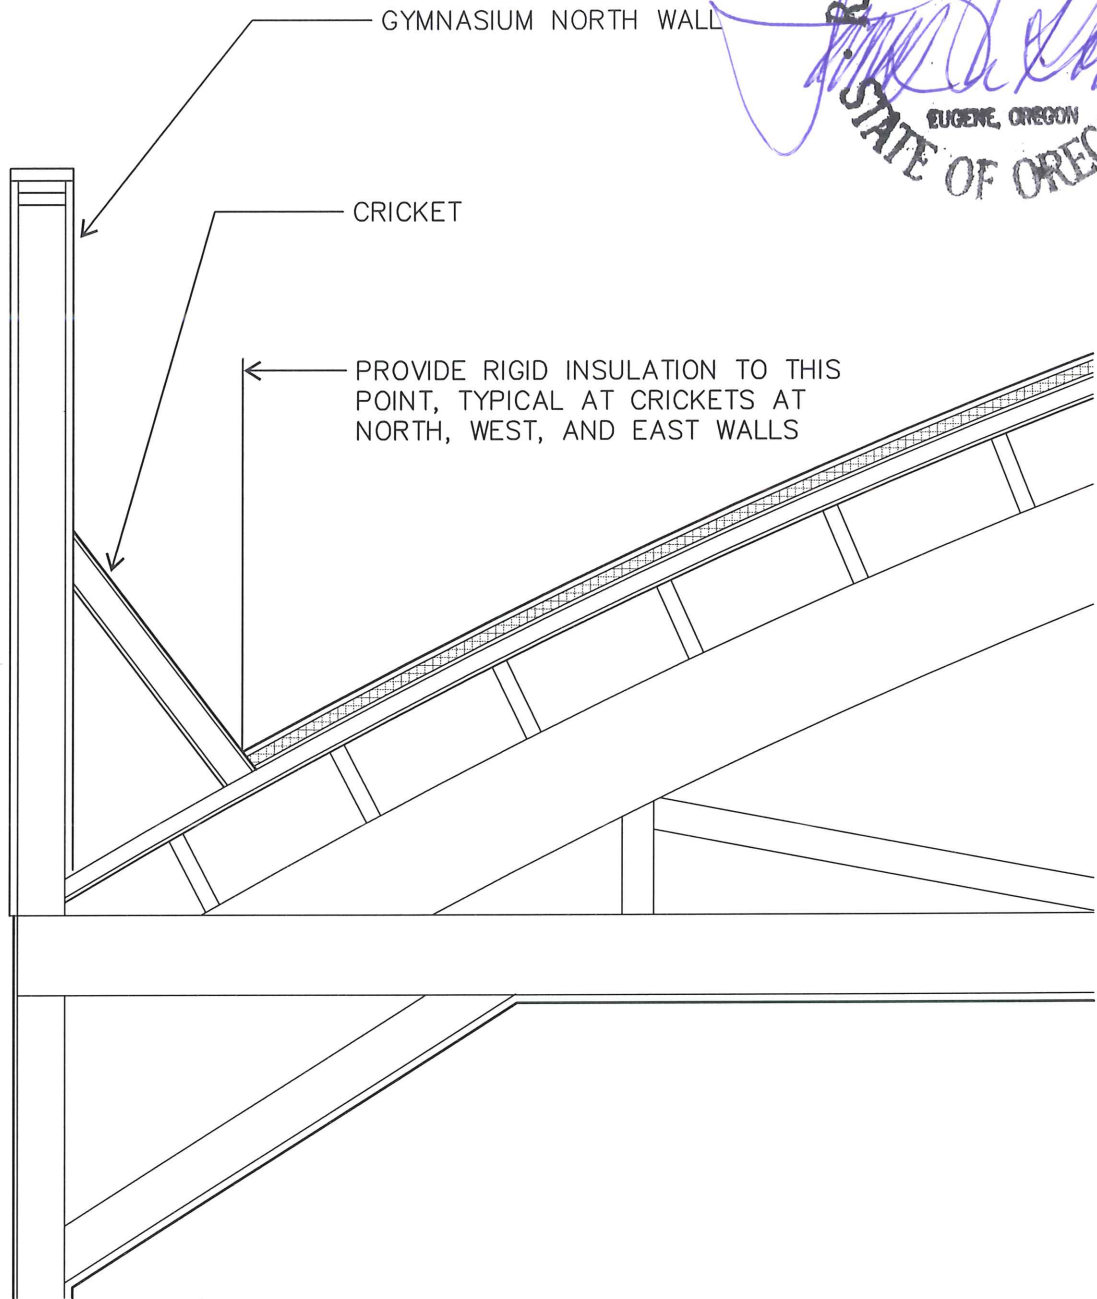
### 6. DRAWING SHEET B2

- A. Detail D3, clarification: This detail applies to north edge of Roof 4. At north edge of Roof 3, sheet metal fascia cover already exists. Existing gutter at north edge of Roof 3 may remain.

## ATTACHMENTS

Pre-Bid Conference List of Attendees  
Detail Sheet AD-1

**END OF ADDENDUM NO. 1**





**SECTION AT GYMNASIUM**

A  
ADI-1

1/4" = 1'-0"

©2016 Robertson | Sherwood | Architects pc

Drawn By BDH	ADDENDUM NO. 1	<b>Robertson   Sherwood   Architects pc</b>				<b>AD1 1</b>
Checked 		132 East Broadway, Suite 540 Eugene, Oregon 97401	P 541   342.8077 F 541   345.4302	www.robertsonsherwood.com		
Date 4/22/15		MULTISITE ROOFING 2016 - C.I.P. #450.780.209				
Project 1607		Kelly Middle School & Willard School				