


#	IDENTIFICATION	CEILING		FLOOR		NORTH WEST WALL		NORTH EAST WALL		SOUTH WEST WALL		SOUTH EAST WALL		CABINETS		TRIM		FERMS		REMARKS
		MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	
1	CLASSROOM	1/2" GYP. BOARD	1/2" ADJUST. TILE	EXIST. CONC. SLAB	ASPHALT TILE	1/2" GYP. BOARD	SOLATONE	1/2" GYP. BOARD	SOLATONE	1/2" GYP. BOARD	SOLATONE	1/2" GYP. BOARD	SOLATONE	DR. PLYWOOD	SEMI-GLOSS	DR. FINISH	SEMI-GLOSS	GLUE-LAM.	STAIN & VARNISH	
2	CLASSROOM	1/2" GYP. BOARD	1/2" ADJUST. TILE			1/2" GYP. BOARD	SOLATONE	1/2" GYP. BOARD	SOLATONE	1/2" GYP. BOARD	SOLATONE	1/2" GYP. BOARD	SOLATONE	DR. PLYWOOD	SEMI-GLOSS	DR. FINISH	SEMI-GLOSS	GLUE-LAM.	STAIN & VARNISH	
3	TOILET	1/2" GYP. BOARD	ENAMEL			1/2" GYP. BOARD	ENAMEL	1/2" GYP. BOARD	ENAMEL	1/2" GYP. BOARD	ENAMEL	1/2" GYP. BOARD	ENAMEL	NONE	NONE		ENAMEL	NONE	NONE	
4	TOILET																			
5	TOILET																			
6	TOILET	1/2" GYP. BOARD	ENAMEL			1/2" GYP. BOARD	ENAMEL	1/2" GYP. BOARD	ENAMEL	1/2" GYP. BOARD	ENAMEL	1/2" GYP. BOARD	ENAMEL	UPPER			ENAMEL			
7	CORRIDOR	1/2" GYP. BOARD	1/2" ADJUST. TILE	EXIST. CONC. SLAB	ASPHALT TILE	1/2" GYP. BOARD	SOLATONE	1/2" GYP. BOARD	SOLATONE	1/2" GYP. BOARD	SOLATONE	1/2" GYP. BOARD	SOLATONE	DR. PLYWOOD	NONE	DR. FINISH	SEMI-GLOSS	NONE	NONE	

NOTES


- 1 EXTEND EXISTING CONDUITS STUBBED UP IN FLOOR TO INTERCOM, SLOTTED & PROGRAM, AND VISUAL AID OUTLETS IN NEW WALLS. ALL EQUIPMENT TO MATCH EXISTING.
  - 2 EXTEND SLOTTED & PROGRAM DEVICE WIRES FROM EXISTING MASTER SLOTTED & PROGRAM MACHINE IN OFFICE, TO NEW OUTLETS AS REQUIRED.
  - 3 EXTEND INTERCOM WIRES FROM MASTER STATION TO NEW OUTLETS AS REQUIRED.
  - 4 INSTALL FIRE ALARM SIREN RELAY IN 10" DIA. CON. NET IN NEW WALL. INSTALL FIRE ALARM SIREN ON WALL TO MATCH EXISTING EQUIPMENT. EXTEND FIRE ALARM RELAY CONTROL WIRES FROM NEAREST EXISTING FIRE ALARM SIREN TO NEW FIRE ALARM RELAY.
- CONDUITS SHOWN DOTTED ARE EXISTING IN OLD & STUBBED UP AT NEW WALL LOCATIONS WITH SLOTTING SET FURSH WITH TOP OF CONCRETE & FLOORED WITH CAST IRON PLUG. SOLID LINES ARE NEW WORK IN WALL OR CEILING.

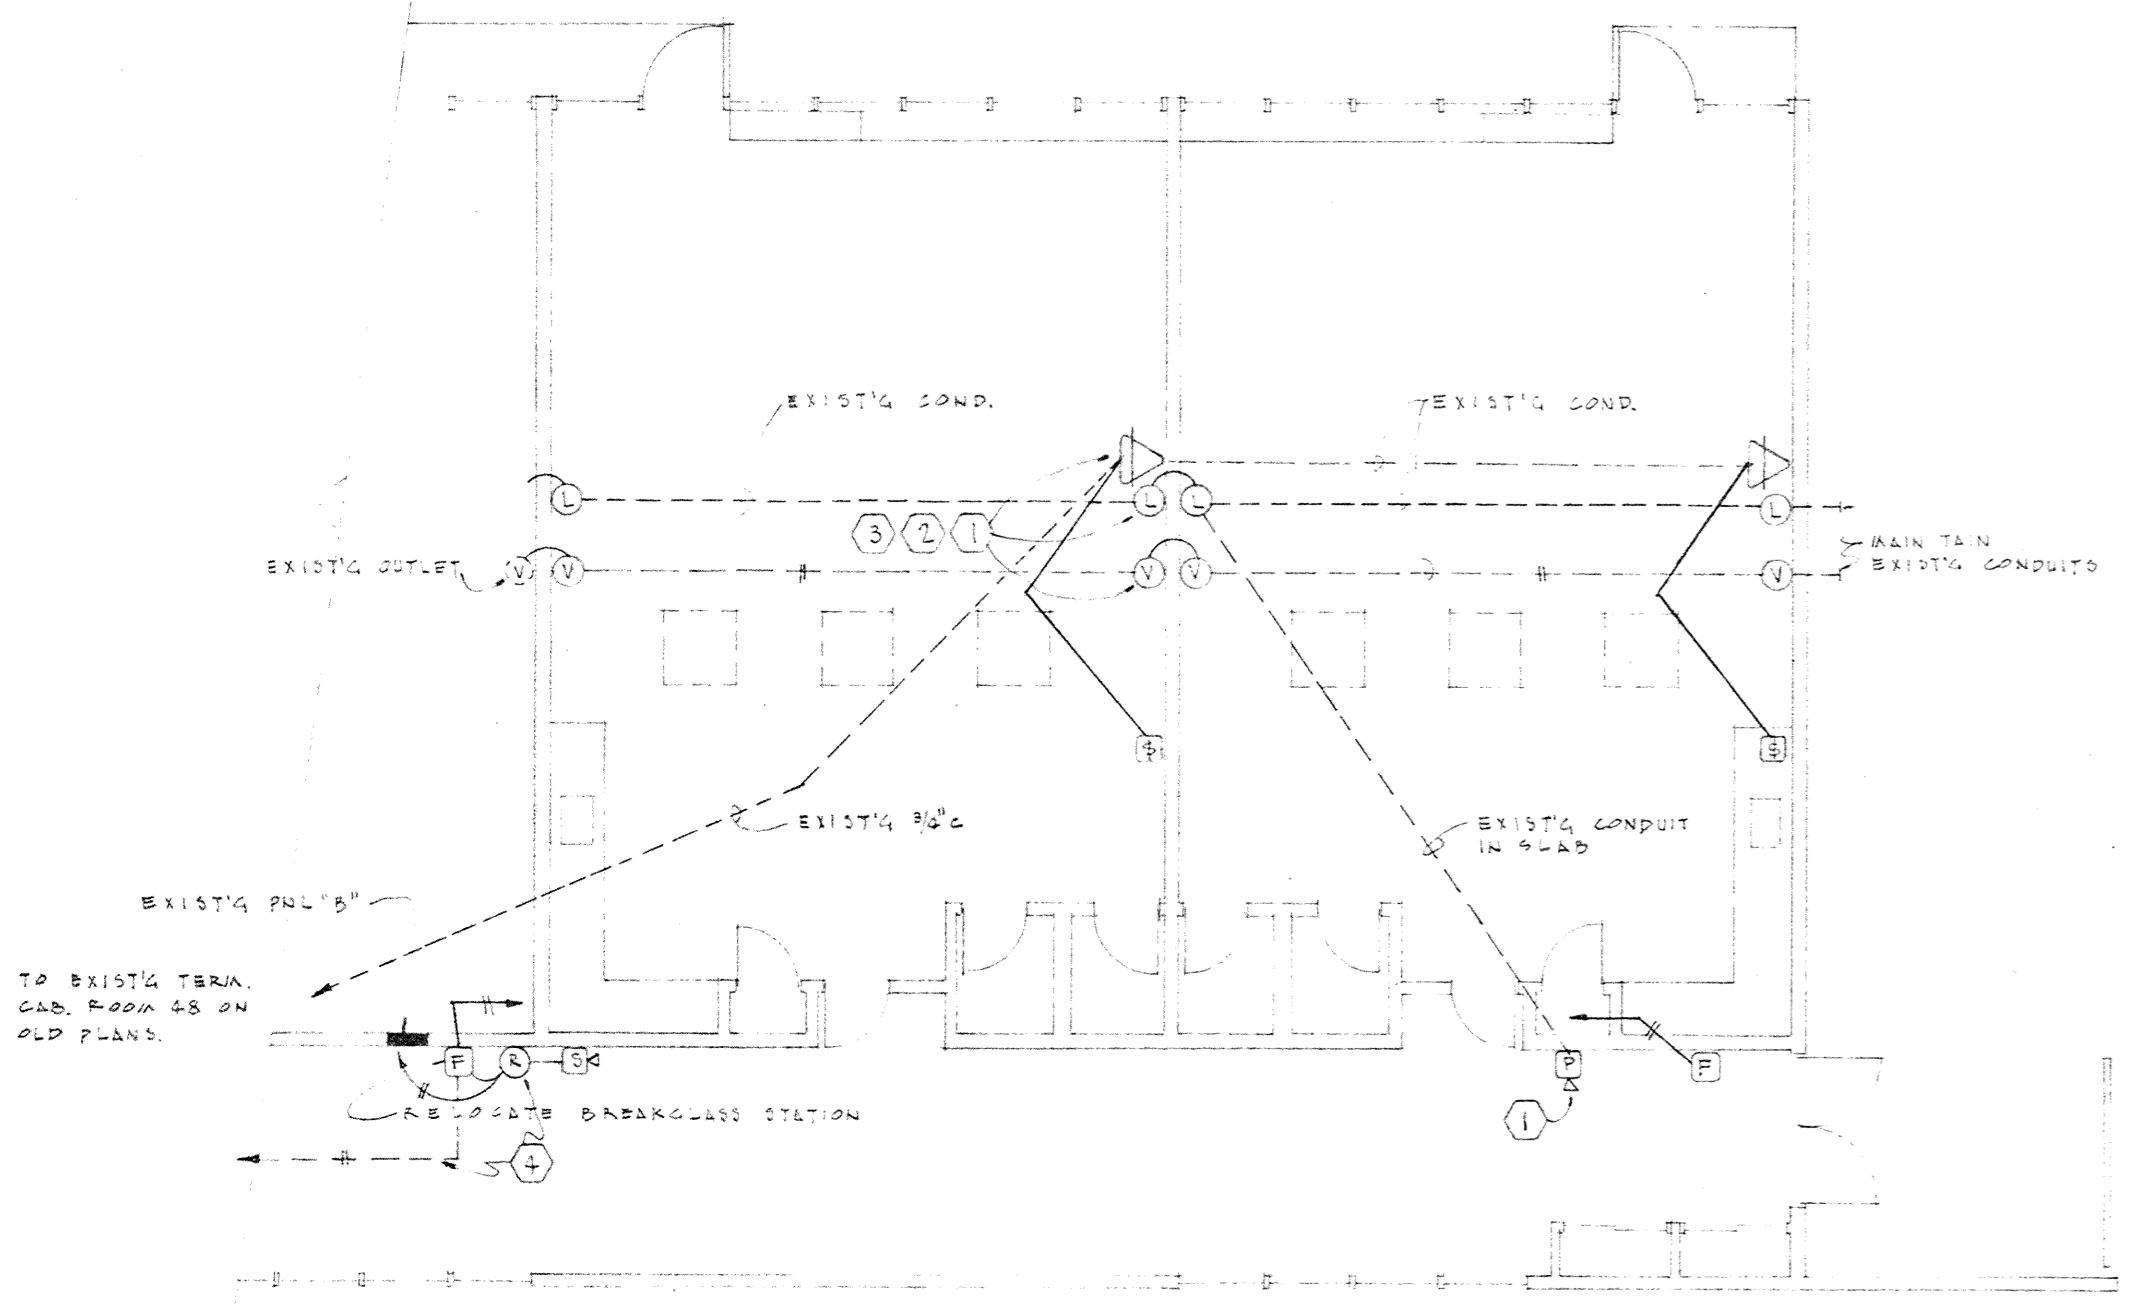

SIGNAL PLAN

SYMBOL SCHEDULE

⊙	VISUAL AID OUTLET UP 1'-0"
⊙	PLUGGED STRAKER EXECUTION NO. 5110LWV UP 8'-0"
⊙	SLOTTED & PROGRAM OUTLETS UP 8'-0"
⊙	PA CALL SWITCH NO. 130 UP 5'-0"
⊙	WIRE ALARM PARALLEL STATION
PK	PROGRAM KEYPAD
R	P.A. RELAY
SK	P.A. SIREN

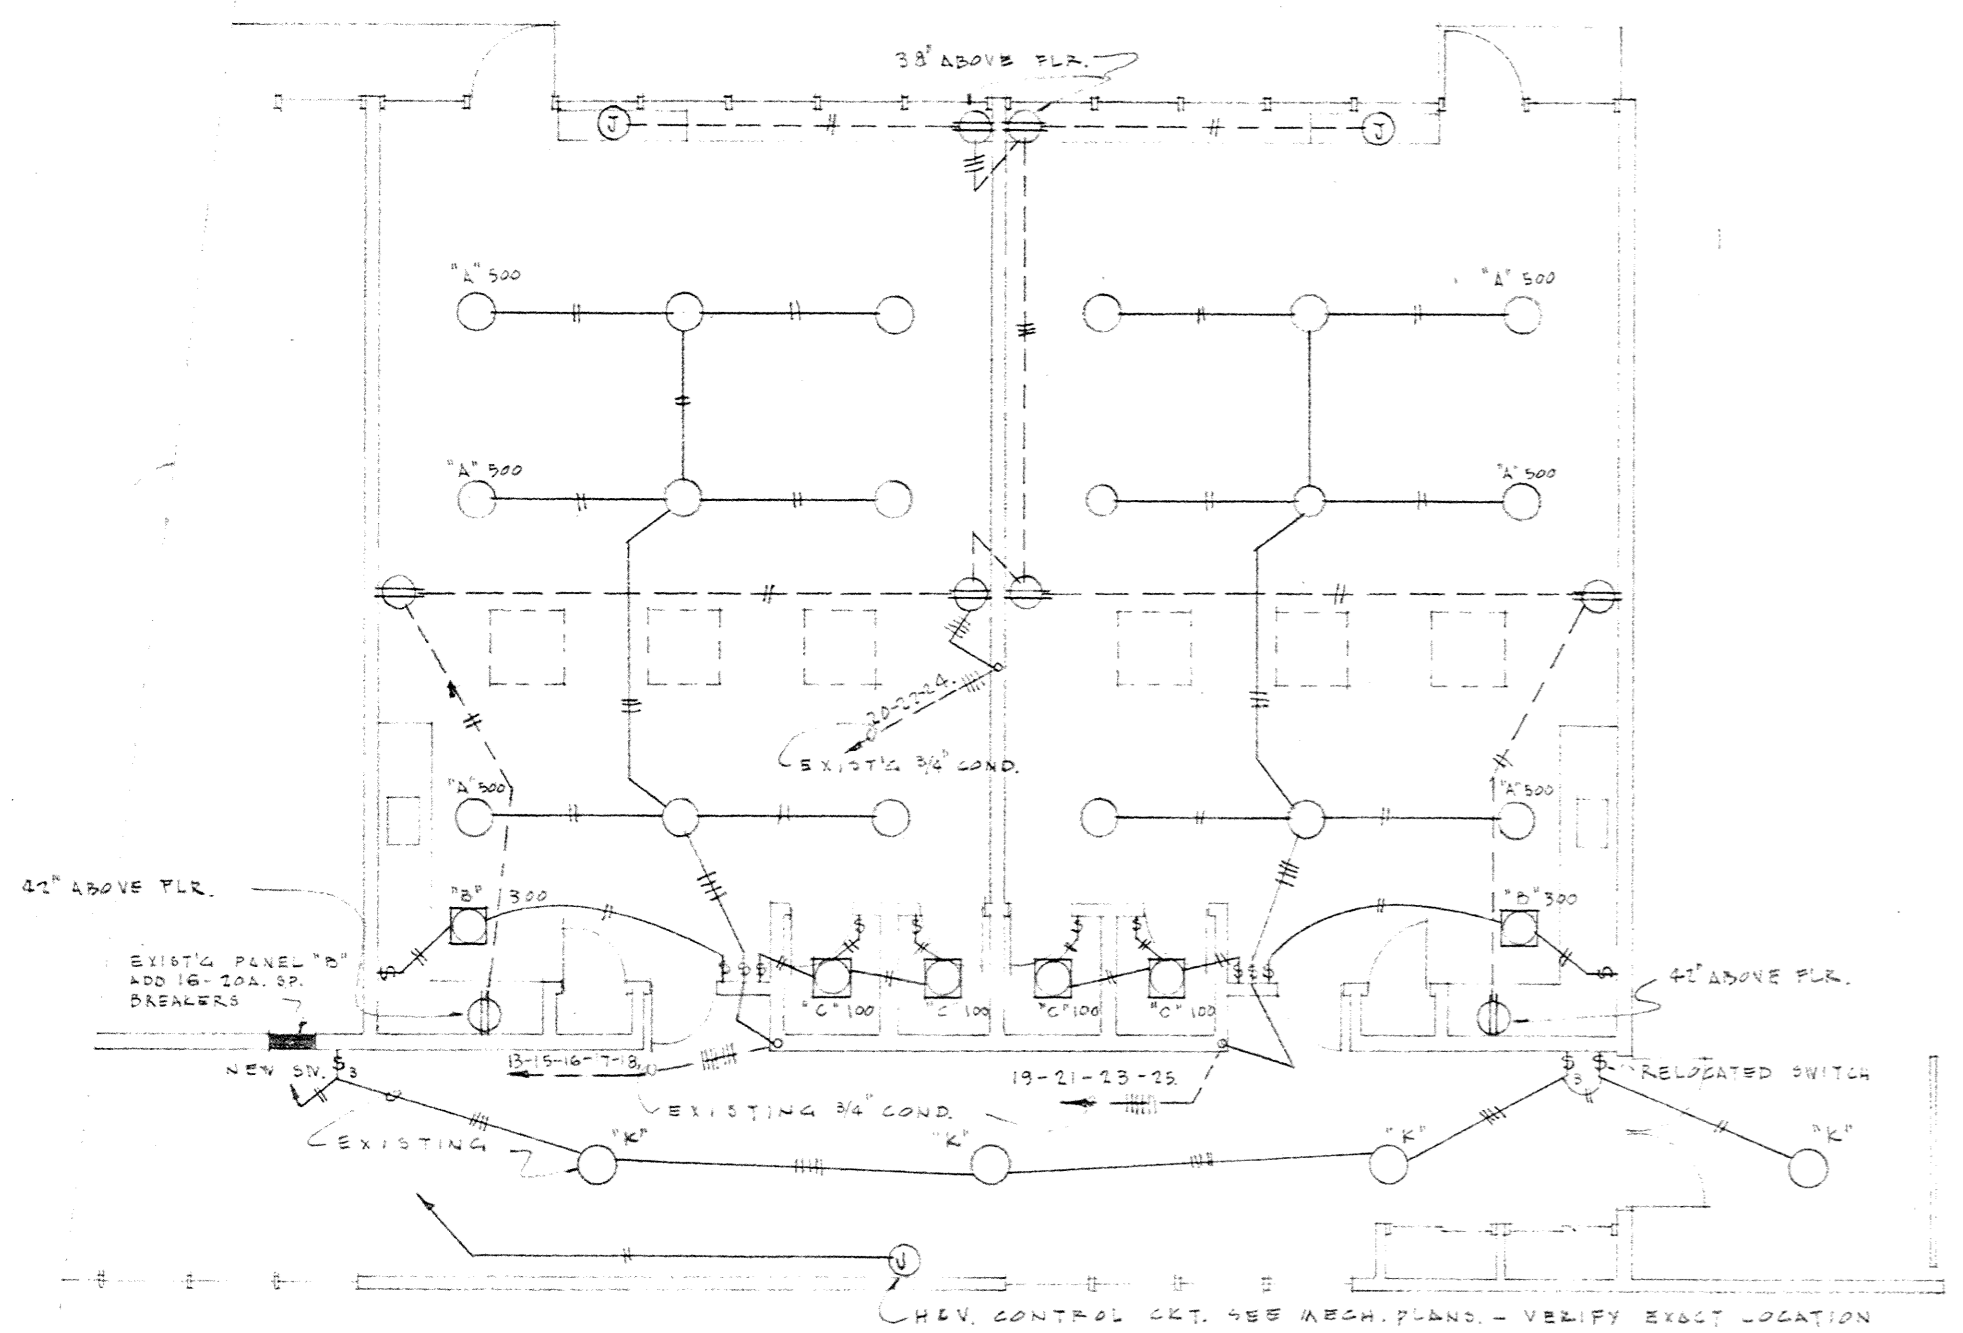

LIGHTING PLAN

SYMBOL SCHEDULE

⊙	CEILING LIGHT OUTLET
⊙	RECESSED CEILING LIGHT OUTLET
⊙	JUNCTION BOX
⊙	DUPLEX RECEPTACLE OUTLET
⊙	SINGLE P.O.B. SWITCH
⊙	THREE WAY SWITCH

NOTE: ALL FEATURES TO MATCH EXISTING IN LINE AREAS. ADJUST FIXTURE LOCATION AS NECESSARY.

