## General Notes:

- 1. The drawing is to be used for general information. Contractor responsible for verifying existing site conditions, identified asbestos containing material & non-asbestos containing material quantities to be removed and all field measurements.
- 2. Work to be conducted in accordance with all state and local fire codes.
- 3. Abatement contractor to use "friable methods" for flooring and wall material removal identified in drawing A-1.
- 4. Abatement contractor responsible for proper disposal of all generated asbestos containing waste and identified selective non-asbestos containing waste.
- 5. Briefly, the work is described as the removal and disposal of approximately 230 sq. ft. of asbestos containing flooring. The work also includes the selective removal and disposal of approximately 2,488 of non-asbestos containing wall material, 240 sq. ft. of carpet, 2 windows, bookcase, built-in countertop and 1 door in room #19.
- 6. This project is scheduled to be performed in one mobilization.

## Abatement Notes:

Build a full negative pressure enclosure w/3 chamber decon to remove asbestos flooring and non-asbestos wall material down to concrete slab as

XXXX Non-asbestos countertop, bookcase and door to be removed and disposed of as indicated on drawing A-1.


Asbestos containing 9"x9" floor tile / mastic to be removed back to the first full tile and disposed of as indicated on drawing A-1.

Asbestos containing 9"x9" floor tile / mastic to be removed as indicated on drawing A-1. Also, carpet over flooring can be removed / disposed of prior to asbestos abatement as long as floor tiles do not start to pull up with carpet.

Non-asbestos containing wall material to be removed and disposed of as indicated on drawing A-1.

Abatement Schedule: Start: June 17, 2020 Finish: June 24, 2020

Substantial Completion: June 24, 2020

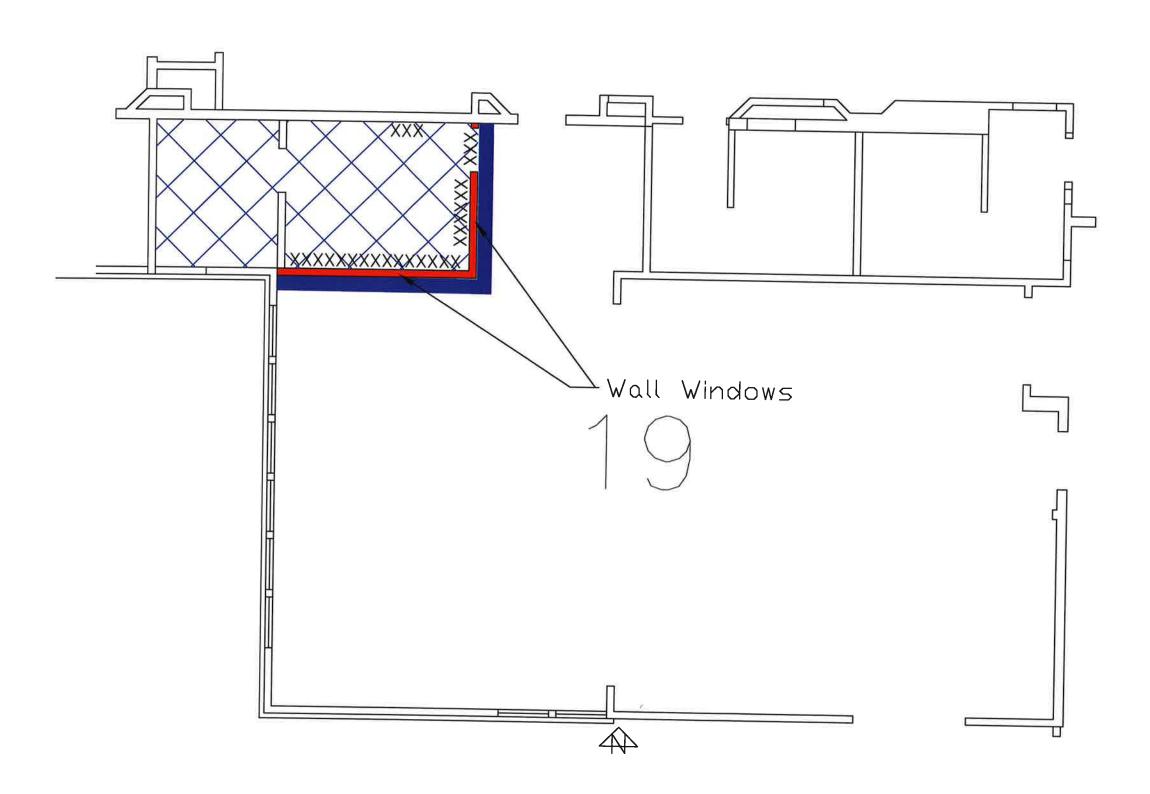



Facilities Management School District 4J 715 W. 4th Avenue Eugene, OR 97402 (541) 790-7400

97404 School OR Eugene Middle Ave., Kelly Howard Colin 850

DATE: 02-12-2020

DRAWN BY D. Lemonds